


Switchboard instruments



Panel instruments



Transducers


- MEASURING INSTRUMENTS
- ARRESTERS
- TRANSDUCERS
- POWER FACTOR CONTROLLERS
- POWER MONITORING EQUIPMENT (F-MPC)




Arresters



Instrument transformers



Power monitoring equipment F-MPC



Automatic power factor regulators

LOW
VOLTAGE
EQUIPMENT
Up to 600 Volts

INDIVIDUAL CATALOG 09

from D&C CATALOG 20th Edition

01 02 03 04 05 06 07 08 **09** 10 11 12

09

Measuring Instruments, Transducers Arresters, Power Factor Controllers Power Monitoring Equipment



	Page
Switchboard Instruments	
WM8N type	09/1
Power line multi-meters WE1MA	09/10
Panel Instruments	
F type	09/23
Transducers	
C series	09/32
WF series	09/39
WH7 series	09/43
WT2AC	09/55
Arresters (Surge protective devices)	
CN232, 233	09/57
CN226	09/60
CN227	09/62
CN2340, 2341	09/70
Instrument Transformers	
General information	09/71
Through-type CT/CC3L	09/72
CT with primary winding/CC3P	09/75
Through type CT/CC3M	09/77
Split type CT/CC2	09/82
Voltage transformers/CD32, 34	09/84
Optional accessories	09/85
Power Factor Controllers	
Automatic power factor regulator QC06E and QC12E	09/86
Power Monitoring Equipment	
General information	09/102
Multiple function protectors and controllers	
F-MPC60B, F-MPC30	09/103
Power monitoring unit	
F-MPC04, F-MPC04P, F-MPC04S	09/118
MCCB with ZCT and zero-phase CT	09/132
Current transformers CC2	09/134
Terminal relay RS16	09/137
Connector terminal-block AU-CW21B1	09/138



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

MINIMUM ORDERS

Orders amounting to **less than ¥10,000** net per order will be charged as ¥10,000 net per order plus freight and other charges.

WEIGHTS AND DIMENSIONS

Weights and dimensions appearing in this catalog are the best information available at the time of going to press.

FUJI ELECTRIC FA has a policy of continuous product improvement, and design changes may make this information out of date.

Please confirm such details before planning actual construction.

INFORMATION IN THIS CATALOG IS SUBJECT TO CHANGE WITHOUT NOTICE.


WM8N type wide-angle indicating switchboard instruments

■ Description

WN8N-type meters are used in many industrial applications such as switchboards, supervisory panels, metal-clad switchgear and control desks. These are compact in size and easy to read. Scales have equal intervals and indicate through a 240° angle, a feature which distinguishes them from the conventional meters. Meters can be read at a distance, since instrument surfaces are protected by a non-reflecting glass and are not affected by reflections from room lighting. Ammeters are provided with an overload scale in red. These instruments comply with the requirements of JIS C1102 and are highly reliable. They can withstand a great deal of abuse in use because of their rugged construction.

■ Features

- High accuracy
External magnetic fields cannot influence readings.
- Accuracy class: 1.5
- Easy-to-read long-scales and pointer-indications can easily be read from a distance.
- 110 × 110mm and 80 × 80mm front frame sizes.
- Auxiliary equipment such as shunt, impedance box and series resistor is available.

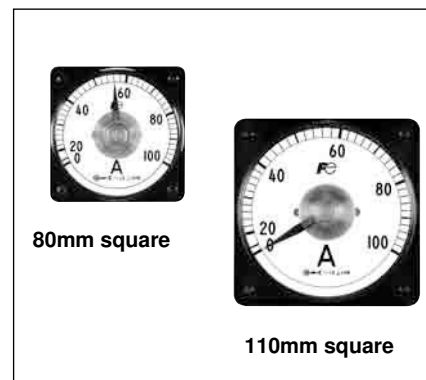

Meter	Description	110mm square Type	80mm square Type																																																																		
AC ammeter	For direct connection	WM8NAR3 (RMS responding)	WM8NAR6 (RMS responding)																																																																		
	<table border="1"> <thead> <tr> <th>Measuring range</th> <th>Extended range type (0–X–3X)</th> <th>Operating principle</th> <th>Power consumption</th> </tr> </thead> <tbody> <tr> <td>0 – 1A</td> <td>0 – 1 – 3A</td> <td rowspan="2">RMS responding</td> <td rowspan="2">0.4VA</td> </tr> <tr> <td>0 – 3A</td> <td>0 – 3 – 9A</td> </tr> <tr> <td>0 – 5A</td> <td>0 – 5 – 15A</td> <td rowspan="4">Moving iron</td> <td rowspan="4">3VA</td> </tr> <tr> <td>0 – 10A</td> <td>0 – 10 – 30A</td> </tr> <tr> <td>0 – 15A</td> <td>0 – 15 – 45A</td> </tr> <tr> <td>0 – 20A</td> <td>0 – 20 – 60A</td> </tr> <tr> <td>0 – 30A</td> <td>–</td> <td></td> <td></td> </tr> </tbody> </table>			Measuring range	Extended range type (0–X–3X)	Operating principle	Power consumption	0 – 1A	0 – 1 – 3A	RMS responding	0.4VA	0 – 3A	0 – 3 – 9A	0 – 5A	0 – 5 – 15A	Moving iron	3VA	0 – 10A	0 – 10 – 30A	0 – 15A	0 – 15 – 45A	0 – 20A	0 – 20 – 60A	0 – 30A	–																																												
Measuring range	Extended range type (0–X–3X)	Operating principle	Power consumption																																																																		
0 – 1A	0 – 1 – 3A	RMS responding	0.4VA																																																																		
0 – 3A	0 – 3 – 9A																																																																				
0 – 5A	0 – 5 – 15A	Moving iron	3VA																																																																		
0 – 10A	0 – 10 – 30A																																																																				
0 – 15A	0 – 15 – 45A																																																																				
0 – 20A	0 – 20 – 60A																																																																				
0 – 30A	–																																																																				
AC ammeter	For connection to CT	WM8NAS3 (Moving iron)	WM8NAS6 (Moving iron)																																																																		
	<table border="1"> <thead> <tr> <th>CT ratio</th> <th>Measuring range</th> <th>Extended type (0–X–3X)</th> <th>Operating principle</th> <th>Power consumption</th> </tr> </thead> <tbody> <tr> <td>5/5A</td> <td>0 – 5A</td> <td>0 – 5 – 15A</td> <td rowspan="2">RMS responding</td> <td rowspan="2">0.4VA</td> </tr> <tr> <td>10/5A</td> <td>0 – 10A</td> <td>0 – 10 – 30A</td> </tr> <tr> <td>15/5A</td> <td>0 – 15A</td> <td>0 – 15 – 45A</td> <td rowspan="14">Moving iron</td> <td rowspan="14">3VA</td> </tr> <tr> <td>20/5A</td> <td>0 – 20A</td> <td>0 – 20 – 60A</td> </tr> <tr> <td>30/5A</td> <td>0 – 30A</td> <td>0 – 30 – 90A</td> </tr> <tr> <td>40/5A</td> <td>0 – 40A</td> <td>0 – 40 – 120A</td> </tr> <tr> <td>50/5A</td> <td>0 – 50A</td> <td>0 – 50 – 150A</td> </tr> <tr> <td>60/5A</td> <td>0 – 60A</td> <td>0 – 60 – 180A</td> </tr> <tr> <td>75/5A</td> <td>0 – 75A</td> <td>0 – 75 – 225A</td> </tr> <tr> <td>100/5A</td> <td>0 – 100A</td> <td>0 – 100 – 300A</td> </tr> <tr> <td>150/5A</td> <td>0 – 150A</td> <td>0 – 150 – 450A</td> </tr> <tr> <td>200/5A</td> <td>0 – 200A</td> <td>0 – 200 – 600A</td> </tr> <tr> <td>300/5A</td> <td>0 – 300A</td> <td>0 – 300 – 900A</td> </tr> <tr> <td>400/5A</td> <td>0 – 400A</td> <td>0 – 400 – 1200A</td> </tr> <tr> <td>500/5A</td> <td>0 – 500A</td> <td>0 – 500 – 1500A</td> </tr> <tr> <td>600/5A</td> <td>0 – 600A</td> <td>0 – 600 – 1800A</td> </tr> <tr> <td>750/5A</td> <td>0 – 750A</td> <td>0 – 750 – 2250A</td> </tr> <tr> <td>800/5A</td> <td>0 – 800A</td> <td>0 – 800 – 2400A</td> </tr> <tr> <td>1000/5A</td> <td>0 – 1000A</td> <td>0 – 1000 – 3000A</td> </tr> <tr> <td>1000/5A</td> <td>0 – 1kA</td> <td>0 – 1kA – 3kA</td> </tr> </tbody> </table>			CT ratio	Measuring range	Extended type (0–X–3X)	Operating principle	Power consumption	5/5A	0 – 5A	0 – 5 – 15A	RMS responding	0.4VA	10/5A	0 – 10A	0 – 10 – 30A	15/5A	0 – 15A	0 – 15 – 45A	Moving iron	3VA	20/5A	0 – 20A	0 – 20 – 60A	30/5A	0 – 30A	0 – 30 – 90A	40/5A	0 – 40A	0 – 40 – 120A	50/5A	0 – 50A	0 – 50 – 150A	60/5A	0 – 60A	0 – 60 – 180A	75/5A	0 – 75A	0 – 75 – 225A	100/5A	0 – 100A	0 – 100 – 300A	150/5A	0 – 150A	0 – 150 – 450A	200/5A	0 – 200A	0 – 200 – 600A	300/5A	0 – 300A	0 – 300 – 900A	400/5A	0 – 400A	0 – 400 – 1200A	500/5A	0 – 500A	0 – 500 – 1500A	600/5A	0 – 600A	0 – 600 – 1800A	750/5A	0 – 750A	0 – 750 – 2250A	800/5A	0 – 800A	0 – 800 – 2400A	1000/5A	0 – 1000A	0 – 1000 – 3000A
CT ratio	Measuring range	Extended type (0–X–3X)	Operating principle	Power consumption																																																																	
5/5A	0 – 5A	0 – 5 – 15A	RMS responding	0.4VA																																																																	
10/5A	0 – 10A	0 – 10 – 30A																																																																			
15/5A	0 – 15A	0 – 15 – 45A	Moving iron	3VA																																																																	
20/5A	0 – 20A	0 – 20 – 60A																																																																			
30/5A	0 – 30A	0 – 30 – 90A																																																																			
40/5A	0 – 40A	0 – 40 – 120A																																																																			
50/5A	0 – 50A	0 – 50 – 150A																																																																			
60/5A	0 – 60A	0 – 60 – 180A																																																																			
75/5A	0 – 75A	0 – 75 – 225A																																																																			
100/5A	0 – 100A	0 – 100 – 300A																																																																			
150/5A	0 – 150A	0 – 150 – 450A																																																																			
200/5A	0 – 200A	0 – 200 – 600A																																																																			
300/5A	0 – 300A	0 – 300 – 900A																																																																			
400/5A	0 – 400A	0 – 400 – 1200A																																																																			
500/5A	0 – 500A	0 – 500 – 1500A																																																																			
600/5A	0 – 600A	0 – 600 – 1800A																																																																			
750/5A	0 – 750A	0 – 750 – 2250A																																																																			
800/5A	0 – 800A	0 – 800 – 2400A																																																																			
1000/5A	0 – 1000A	0 – 1000 – 3000A																																																																			
1000/5A	0 – 1kA	0 – 1kA – 3kA																																																																			

■ Ordering information

Specify the following:

1. Type number (Ordering code)
2. Measuring range
3. Supply voltage and frequency
4. Connection (When connecting to VT or CT, specify VT ratio or CT ratio)

For further information, see page 09/04.

Meter	Description	110mm square Type (Ordering code)	80mm square Type (Ordering code)	
AC voltmeter	<p>For direct connection</p> <p>Measuring range</p> <p>0 – 50V 0 – 100V 0 – 150V 0 – 300V 0 – 600V</p>	<p>Operating principle</p> <p>RMS responding</p> <p>Moving iron</p>	<p>Power consumption</p> <p>50V: 0.1V 100V: 0.1VA 150V: 0.9VA 300V: 1.8VA 600V: 1.2VA</p> <p>8VA</p>	<p>WM8NVR3 (RMS responding)</p> <p>WM8NVR6 (RMS responding)</p> <p>WM8NVS3 (Moving iron)</p> <p>WM8NVS6 (Moving iron)</p>
	<p>For connection to VT</p> <p>VT ratio Measuring range</p> <p>440/110V 0 – 600V 3300/110V 0 – 4.5kV 6600/110V 0 – 9kV 6600/110V 0 – 9000V</p> <p style="text-align: center;">VT ratio: Y/110 (Y: VT primary voltage)</p>	<p>Operating principle</p> <p>RMS responding</p> <p>Moving iron</p>	<p>Power consumption</p> <p>0.9VA</p> <p>8VA</p>	
DC ammeter	<p>For direct connection</p> <p>Measuring range</p> <p>0 – 1mA 0 – 1A 0 – 3mA 0 – 5A 0 – 5mA 0 – 10A 0 – 10mA 0 – 15A 0 – 30mA 0 – 30A 0 – 50mA 0 – 100mA</p>	<p>Operating principle: Moving coil type</p> <p>Internal resistance:</p> <p>1mA: Approx. 185Ω 3mA: Approx. 17Ω 5mA: Approx. 10Ω 10mA and above: Approx. 50mV</p>		<p>WM8NAM3 (Moving coil)</p> <p>WM8NAM6 (Moving coil)</p>
	<p>For connection to shunt</p> <p>Measuring range</p> <p>0 – 50A 0 – 200A 0 – 75A 0 – 250A 0 – 100A 0 – 500A 0 – 150A</p>	<p>Operating principle: Moving coil type</p> <p>Shunt ratings: 60mV</p>		
DC voltmeter	<p>For direct connection</p> <p>Measuring range</p> <p>0 – 10V 0 – 200V 0 – 30V 0 – 300V 0 – 50V 0 – 500V 0 – 100V 0 – 600V 0 – 150V</p>	<p>Operating principle: Moving coil type</p> <p>Series resistor: Internal</p> <p>Internal resistance:</p> <p>10V: 10kΩ 200V: 200kΩ 30V: 30kΩ 300V: 300kΩ 50V: 50kΩ 500V: 500kΩ 100V: 100kΩ 600V: 600kΩ 150V: 150kΩ</p>		<p>WM8NVM3 (Moving coil)</p> <p>WM8NVM6 (Moving coil)</p>
	<p>For connection to series resistor</p> <p>Measuring range</p> <p>0 – 750V 0 – 1kV 0 – 1.5kV 0 – 2kV</p>	<p>Operating principle: Moving coil type</p> <p>Series resistor: External</p> <p>Power consumption: 1mA</p>		

■ **Ordering information**

Specify the following:

1. Type number (Ordering code)
2. Measuring range
3. Supply voltage and frequency
4. Connection (When connecting to VT or CT, specify VT ratio or CT ratio)

For further information, see page 09/04.



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

Meter	Description		110mm square Type	80mm square Type
Frequency meter	Measuring range 45 – 55Hz 110V 55 – 65Hz 110V 45 – 55Hz 220V 55 – 65Hz 220V	Operating principle: Frequency/DC transducing type Power consumption: 1.5VA at 110V 1.5VA at 220V	WM8NP13	WM8NP16
Single-phase 2-wire wattmeter	For connection to VT and CT Measuring range 0 – ZkW $Z = 0.5 \times \frac{X}{5} \times \frac{Y}{110}$ Z: kWatt X: CT primary current Y: VT primary voltage	Operating principle: Power/DC transducing type Power consumption (WM8NC03) Current coil: 1VA (at 5A) Voltage coil: 2VA (at 110V) Power consumption (WM8NC06) Current coil: 0.5VA (at 5A) Voltage coil: 1.7VA (at 110V)	WM8NC03	WM8NC06
3-phase 3-wire wattmeter	For connection to VT and CT Measuring range 0 – ZkW $Z = \frac{X}{5} \times \frac{Y}{110}$ Z: kWatt X: CT primary current Y: VT primary voltage	Operating principle: Power/DC transducing type Power consumption Current coil: 0.5VA per element (at 5A) Voltage coil: 1.7VA per element (at 110V)	WM8NC23	WM8NC26
3-phase 4-wire wattmeter	For connection to VT and CT Measuring range 0 – ZkW $Z = \frac{X}{5} \times \frac{Y}{110}$ Z: kWatt X: CT primary current Y: VT primary voltage	Operating principle: Power/DC transducing type Power consumption Current coil: 0.5VA per element (at 5A) Voltage coil: 0.8VA per element (at 110V)	WM8NC33	WM8NC36
3-phase 3-wire varmeter	For connection to VT and CT Measuring range 0 – Zkvar $Z = \frac{X}{5} \times \frac{Y}{110}$ Z: kvar X: CT primary current Y: VT primary voltage	Operating principle: Reactive power/DC transducing type Power consumption Current coil: 0.5VA per element (at 5A) Voltage coil: 1.7VA per element (at 110V)	WM8NV23	WM8NV26
3-phase 4-wire varmeter	For connection to VT and CT Measuring range 0 – Zkvar $Z = \frac{X}{5} \times \frac{Y}{110}$ Z: kvar X: CT primary current Y: VT primary voltage	Operating principle: Reactive power/DC transducing type Power consumption Current coil: 0.5VA per element (at 5A) Voltage coil: 1.7VA per element (at 110V)	WM8NV33	WM8NV36
3-phase 3-wire power factor meter (for balanced circuit)	For connection to VT and CT VT ratio: $= \frac{Y}{110} V$ CT ratio: $= \frac{X}{5} A$	Operating principle: Phase angle/DC transducing type Power consumption Current coil: 0.9VA (at 5A) Voltage coil: 0.6VA per phase (at 110V)	WM8NA13	WM8NA16
3-phase 3-wire power factor meter (for unbalanced circuit)	For connection to VT and CT VT ratio: $= \frac{Y}{110} V$ CT ratio: $= \frac{X}{5} A$	Operating principle: Phase angle/DC transducing type Power consumption Current coil: 1.1VA per phase (at 5A) Voltage coil: 1.9VA per phase (at 110V)	WM8NA23	WM8NA26
3-phase 4-wire power factor meter (for unbalanced circuit)	For connection to VT and CT VT ratio: $= \frac{Y}{110} V$ CT ratio: $= \frac{X}{5} A$	Operating principle: Phase angle/DC transducing type Power consumption Current coil: 1.1VA per phase (at 5A) Voltage coil: 0.8VA per phase (at 110V)	WM8NA43	WM8NA46

■ Type number nomenclature

WM8N AR 3 - ALS 5YYY A Y

Basic type —————

Category —————

Dimensions —————

Additional specifications —————

Scale unit —————

Scale numbers —————

Rated Input —————

AC ammeter (AC) *

For direct connection

Standard ALA : 0 to 1A
ALJ : 0 to 3A
ALS : 0 to 5A
AMT : 0 to 10A
AND : 0 to 15A
ANG : 0 to 20A
ANL : 0 to 30A

2 times A2Z : Order production

3 times A32 : 0 to 1A times 3
A34 : 0 to 3A times 3
A35 : 0 to 5A times 3
A36 : 0 to 10A times 3
A37 : 0 to 15A times 3
A38 : 0 to 20A times 3
A39 : 0 to 30A times 3
(moving iron type only)

5 times A52 : 0 to 1A times 5
A55 : 0 to 5A times 5

For CT connection

Standard A41 : □A/1A
A42 : □A/5A

2 times A43 : □A/1A times 2
A44 : □A/5A times 2

3 times A45 : □A/1A times 3
A46 : □A/5A times 3

5 times A47 : □A/1A times 5
A48 : □A/5A times 5

Special ZZZ : 0 to 100mA min. to 0 to 30A max.
(Be sure to specify the input value.)

DC ammeter (DC)

Standard AFA : 0 to 1mA
AFN : 0 to 3mA
AFX : 0 to 5mA
AGZ : 0 to 10mA
AHM : 0 to 30mA
AHY : 0 to 50mA
AJR : 0 to 100mA
AKG : 0 to 300mA
AKM : 0 to 500mA
ALA : 0 to 1A
ALC : 0 to 1.5A
ALE : 0 to 2A
ALJ : 0 to 3A
ALS : 0 to 5A
AMT : 0 to 10A
AND : 0 to 15A
ANG : 0 to 20A
ANL : 0 to 30A
A04 : 0 to 60mV (for shunt)
A05 : 0 to 100mV (for shunt)
AHE : 4 to 20mA
AHH : 4 to 25.3mA
DEM : ±500µA
D04 : ±60mV (for shunt)
D08 : 0 to 100mV (for shunt, with VR)

Special ZZZ : Be sure to specify an input value in the range of 0 to 300µA min. to 0 to 1A max.

AC voltmeter (AC) *

For direct connection

VNT : 0 to 50V
VPK : 0 to 100V
VPZ : 0 to 150V
VRX : 0 to 300V
VSJ : 0 to 600V

For VT connection

V12 : 0 to 150V
V13 : 0 to 150/√3V

Special ZZZ : 0 to 50V min. to 0 to 600V max.
(Be sure to specify the input value.)

DC voltmeter (DC)

Standard VLA : 0 to 1V
VLJ : 0 to 3V
VLS : 0 to 5V
VMT : 0 to 10V
VNL : 0 to 30V
VNT : 0 to 50V
VPB : 0 to 75V
VPK : 0 to 100V
VPZ : 0 to 150V
VRL : 0 to 200V
VRX : 0 to 300V
VSF : 0 to 500V
VSJ : 0 to 600V
VLR : 1 to 5V
V01 : For connection to external series resistor

Special ZZZ : 0 to 50mV min. to 0 to 600V max.
(Be sure to specify the input value.)

Frequency meter

Standard H10 : 110V 45 to 55Hz
H11 : 110V 55 to 65Hz
H12 : 110V 45 to 65Hz
H20 : 220V 45 to 55Hz
H21 : 220V 55 to 65Hz
H22 : 220V 45 to 65Hz

Special ZZZ : Specifications not given above.
(Be sure to specify the input value.)

Wattmeter, varmeter, and power factor meter *1*2*4

Standard D13 : 110V/1A
D14 : 110V/5A
D15 : 220V/1A
D16 : 220V/5A
D20 : 110 to 220V/5A

Special ZZZ : Specifications not given above.
(Be sure to specify the input value.)

Additional specifications

Y : None (standard specification)
R : Setting pointer equipped (red)
Z : The following additional specifications (Specify the content.)

[Additional specifications]
Single scale/double printing, double scale/double printing color line, color band, colored characters, meter installation orientation processing for transit through tropical areas

Scale unit

1 : % D : mA R : t/h
2 : m E : kA S : MW
3 : mm F : m³/s T : kV
4 : m³/h G : min⁻¹ U : mV
5 : Nm²/h H : Hz V : V
6 : ppm J : Mvar W : mg/l
7 : rpm K : kvar X : kW
8 : °C L : var Y : x 1/3 kV
9 : l/h M : MPa Z : Not given above.
A : A N : kPa (Be sure to specify.)
B : µA P : Pa
C : cosφ Q : pH

Scale numbers

□□□□ :

Specify the scale numbers with four digits. Enter the specification from the left, and enter "Y" for any remaining digits. Enter "R" for a decimal point. If the scale unit is factored, specify the following at the end: S for x1000, H for x100, or T for x10.

Example 1 : 500V → Specify "500Y".
Example 2 : 5V → Specify "5YYY".
Example 3 : 5.5V → Specify "5R5Y".
Example 4 : 5kV → Specify "5YYY".
Example 5 : 5000V → Specify "5000".
Example 6 : 1000ppm → Specify "1000".
Example 7 : 1 x 1000ppm → Specify "1YYYS".
Example 8 : 4.7 x 100ppm → Specify "4R7H".
Example 9 : 4.7 x 10ppm → Specify "4R7T".
Example 10 : ± scale → Specify "ZZZZ" and specify the scale. For an extended scale, specify the effective scale range (standard scale portion).
Example 11 : 10/5A times 3 extension → Specify "10YY".

CS05 : Power factor meter 0.5 - 1 - 0.5
CST0 : Current power factor meter 0 - 1 - 0 - 1 - 0
HZYY : Frequency meter
01ML *3 : 0 - 1 - 0 (power factor linear scale)
01MN *3 : 0 - 1 - 0 (phase angle linear scale)
05ML *3 : 0.5 - 1 - 0.5 (power factor linear scale)
05MN *3 : 0.5 - 1 - 0.5 (phase angle linear scale)
ZZZZ : Specifications not given above.
(Be sure to specify the scale.)

*3 Power factor display for DC ammeter and voltmeter (reception indicator).

*1 If a CT or VT is used, be sure to specify the CT ratio or VT ratio. (If a power factor meter is used, the CT ratio or VT ratio does not have to be specified.) Also, if a power factor meter for an unbalanced circuit is used, be sure to specify the rated frequency.


*2 Table of rated voltages
○ : Can be produced, — : Cannot be produced.

Category	Voltage between wires: 100V	110 to 220V between wires: 100 to 200V	Voltage between wires: 220V
Single-phase, 2-wire wattmeter/ power factor meter	○	—	○
Single-phase, 3-wire wattmeter	—	○	—
3-phase, 3-wire wattmeter	○	—	○
3-phase, 4-wire wattmeter	○	—	○
3-phase power factor meter for balanced circuit	○	—	○
3-phase power factor meter for unbalanced circuit	○	—	○
3-phase, 4-wire power factor meter	○	—	○
Single-phase, 2-wire varmeter	○	—	○
3-phase, 3-wire varmeter	○	—	○
3-phase, 4-wire varmeter	○	—	○


*4 The rated voltage for the 3-phase, 4-wire type is the voltage between wires.

■ Dimensions, mm


WM8NAS3, WM8NVS3, WM8NAR3, WM8NVR3, WM8NAM3, WM8NVM3, WM8NA13, WM8NP13, WM8NAT3

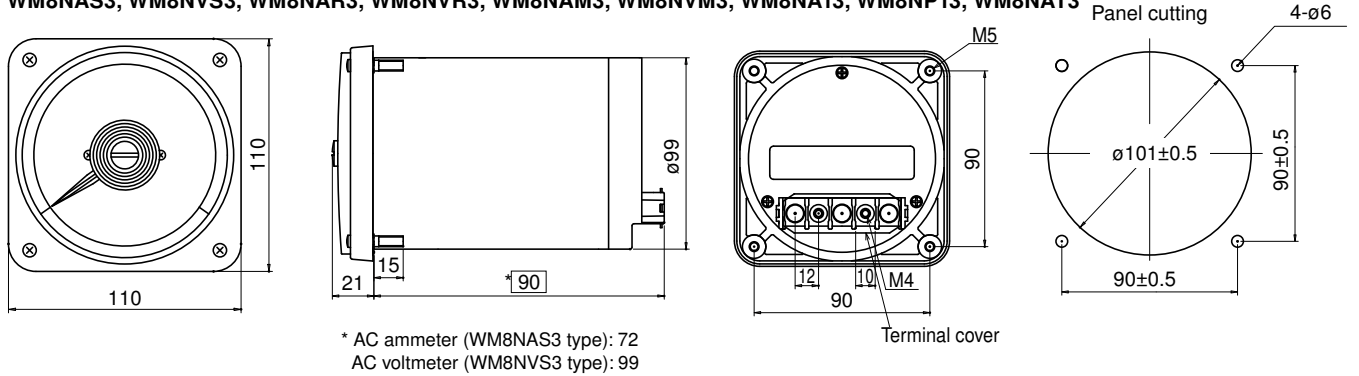


WM8NC03, WM8NC13, WM8NC23, WM8NC33, WM8NV23, WM8NV33, WM8NA23, WM8NA43

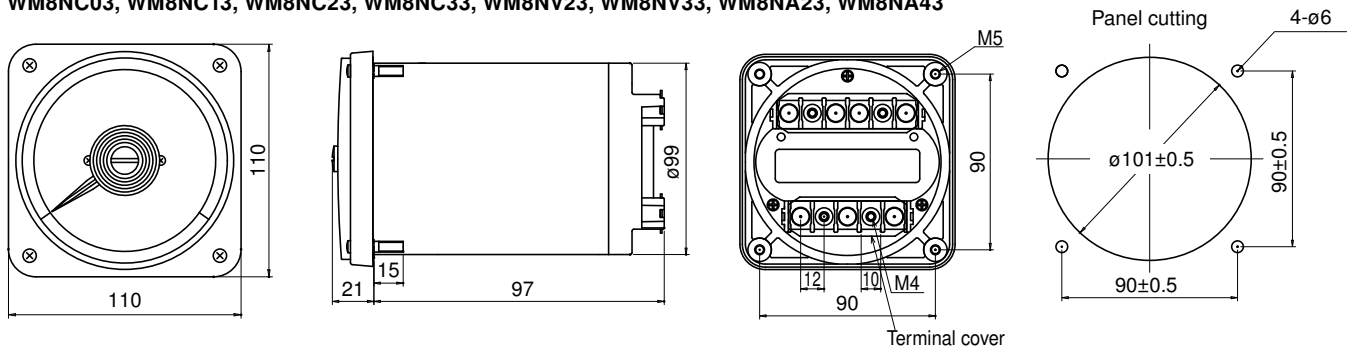


WM8N□6

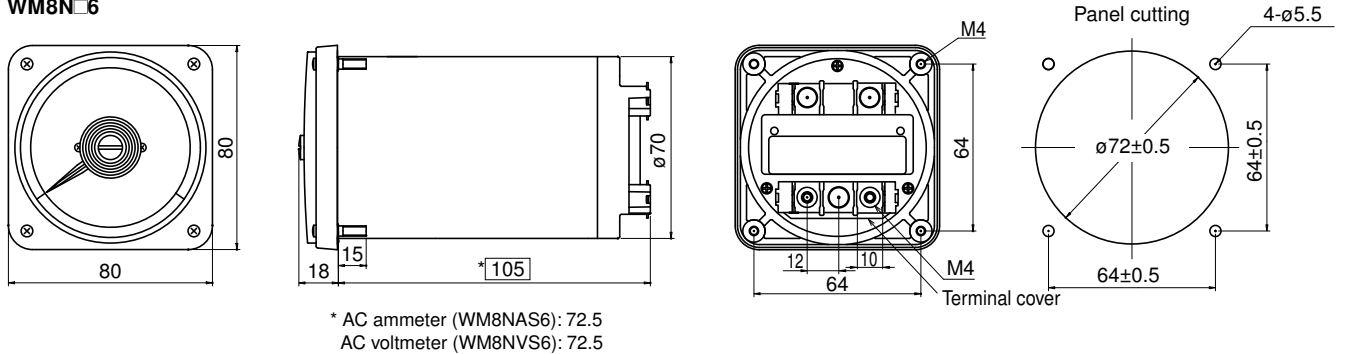

• DC converter for WM8N□6

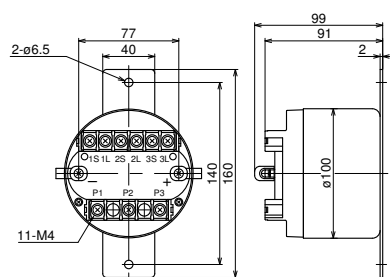



• Series resistor

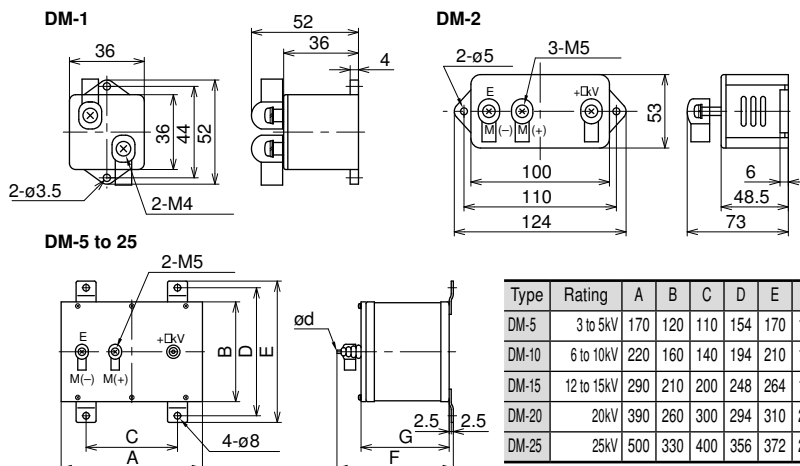

Type	Rating	A	B	C	D	E	F	G	d	Mass (kg)
DM-5	3 to 5kV	170	120	110	154	170	140	106	4	1.0 or less
DM-10	6 to 10kV	220	160	140	194	210	140	106	4	1.5 or less
DM-15	12 to 15kV	290	210	200	248	264	190	146	5	2.0 or less
DM-20	20kV	390	260	300	294	310	220	176	5	3.0 or less
DM-25	25kV	500	330	400	356	372	280	236	5	3.5 or less



■ Wiring diagrams

AC ammeter




For connection CT

AC voltmeter





For connection VT






For connection WM8NVS6 type

DC ammeter





For connection shunt


DC voltmeter




Frequency meter




Wattmeter: WM8NC06
Varmerter: WM8NV16

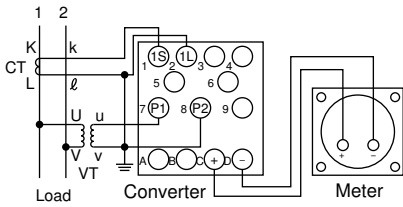


Wattmeter: WM8NC16

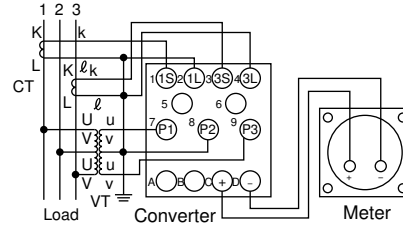


Wattmeter: WM8NC26
Varmerter: WM8NV26

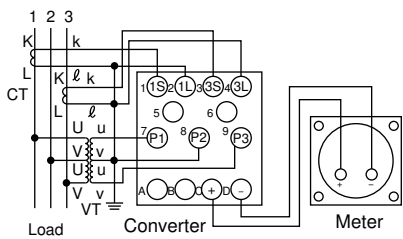


Wattmeter: WM8NC36

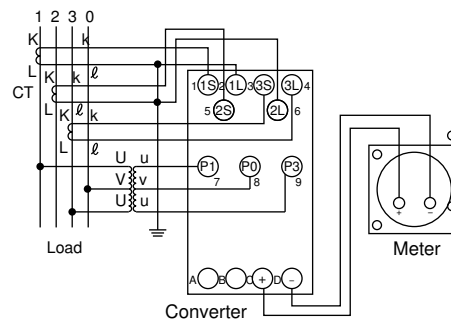


Wattmeter: WM8NC03
Varmerter: WM8NV13

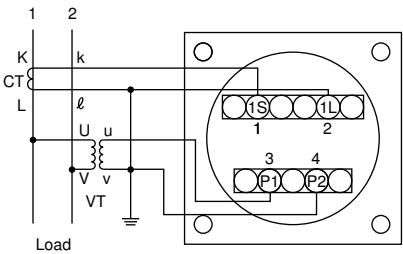


Wattmeter: WM8NC13

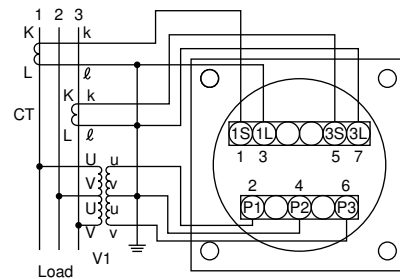


Wattmeter: WM8NC23
Varmerter: WM8NV23

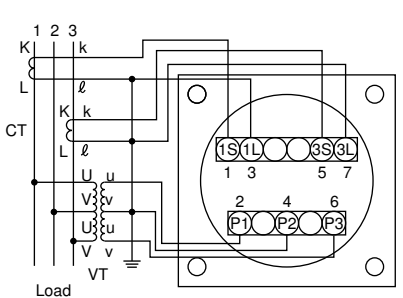


Wattmeter: WM8NC33

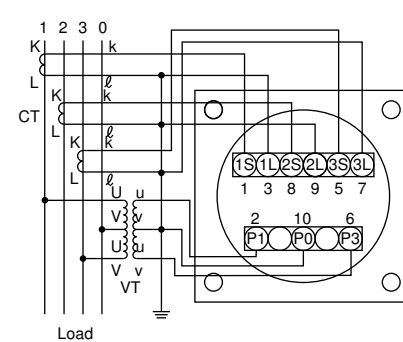


Varmerter: WM8NV36

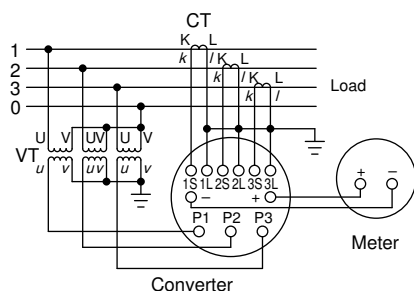


Wattmeter: WM8NV33




Power factor meter: WM8NA06, 03

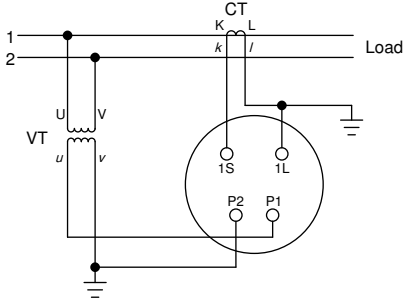


Power factor meter: WM8NA16, 13

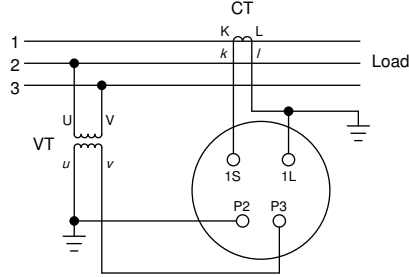


Power factor meter: WM8NA26

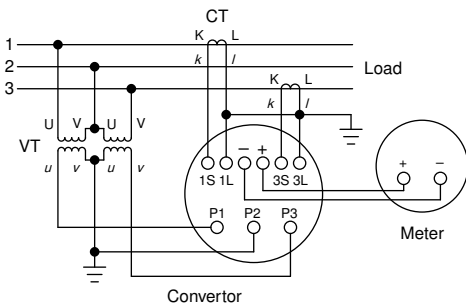


Power factor meter: WM8NA23

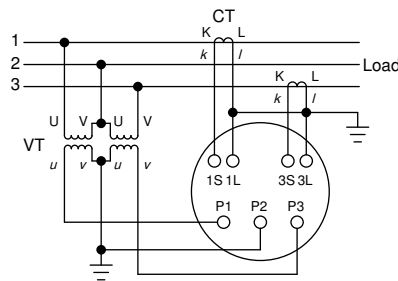

Power factor meter: WM8NA46

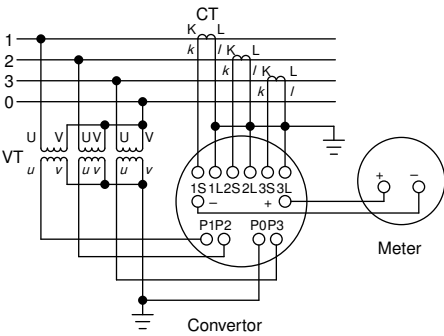


Power factor meter: WM8NA43

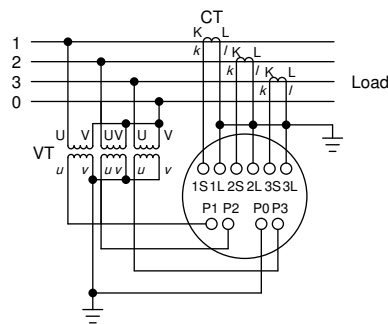

Shunt WM9N-1, -2

■ Features

- Shunt for DC ammeter. JIS (JIS C-1721) class 0.5 and class 1.0 models are available. Select the model based on the required accuracy.
- Keep in mind that a shunt is a source of heat generation, and select a shunt with a current value with sufficient margin. (As a general rule, select a shunt with approximately 1.5 times the continuous operating current.)
- The standard terminal voltage for the shunt is 60mV, but models with voltage of 100 mV can also be produced.

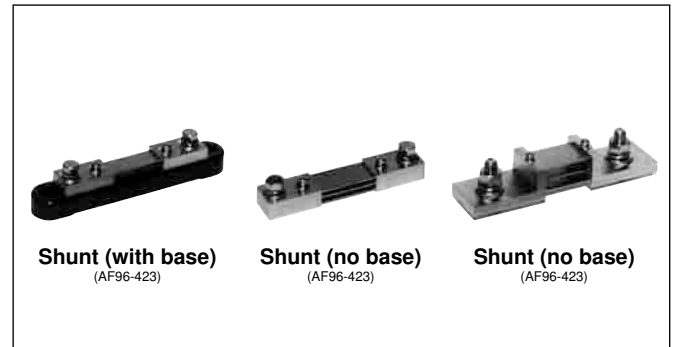


■ Functions and specifications

Item	Applicable meter	JIS Class 0.5 (JIS C-1721)			JIS Class 1.0 (JIS C-1721)				
		Shunt rating	Shunt base / no base	Type	Shunt rating	Shunt base / no base	Type		
Shunt	DC shunt Shunt connection items	60mV	1A	With base	WM9N-1	60mV	1A	With base	WM9N-2
		2A							
		3A							
		4A							
		5A							
		7.5A							
		10A							
		15A							
		20A							
		30A							
		40A							
		50A							
		60A							
		75A							
		100A							
		150A							
		200A							
		250A		No base		250A		No base	
300A									
400A									
500A									
600A									


Note 1: Only one meter and can be connected to each shunt.

■ Dimensions, mm


• 1 to 4A (with base)




• 5 to 50A (with base)



• 60 to 200A (with base)



• 250 to 600A (no base)



■ Connection wires

Use a round-trip resistance of 0.06Ω for the shunt connection conductors. The same applies for class 1.0 models without connection wires.

One-way length (m)	2	3	5.5	9	12.5	22	35
Cross-section area (mm ²)	1.25	2	3.5	5.5	8	14	22

• Dimensions, mm

Current	A	B	C	D	E	T
250•300A	110	130	30	36	M10x30	4
400A	110	140	40	36	M12x35	5
500A•600A	120	160	40	41	M12x35	6

WE1MA power line multi-meters

Description

Perform measurement and monitoring for 213 points in 52 categories for Single-phase/2-wire, Single-phase/3-wire, 3-phase/3-wire, and 3-phase/4-wire

Features

- With one unit, you can measure or monitor the voltage, current, demand current, power, demand power, reactive power, apparent power, power factor, frequency, leakage current, harmonic effective value (A,V), distortion, harmonic content rate, power level, and reactive power level.
- The unit supports 3-phase/3-wire, Single-phase/3-wire, and Single-phase/2-wire and switching to 3-phase/4-wire is supported with 2VT, 3CT/3VT, or 3CT settings.
- The measurements are displayed using a four-element display: one display on the main monitor and three displays on the sub-monitors along with a bar graph.
- Measure and output alarms for leakage current.




- Outputs include four analog circuits, a pulse output, an alarm output, a CPU error output, and a communications output (according to specification).
- Communications output supports F-MPC Net, CC-Link, AnyWire, Modbus RTU, and RS-485 (according to user specification).
- All models comply with the RoHS Directive (i.e., lead-free).

Types and ratings

Measurement	Input specifications		Type		
	Input circuits	Input range			
Current (max. demand, demand, instantaneous), power (max. demand, demand, instantaneous), voltage, power factor, frequency, reactive power, power level, reactive power level, harmonic effective value, distortion, and harmonic content rate	Single-phase/2-wire, Single-phase/3-wire, 3-phase/3-wire or all common	150V/300V, 5A	WE1MA-A □ F □ □ -000		
		150V, 5A	WE1MA-A □ 1 □ □ -000		
		300V, 5A	WE1MA-A □ 3 □ □ -000		
		5A	WE1MA-A □ 5 □ □ -000		
		150V	WE1MA-A □ 9 □ □ -000		
		300V	WE1MA-A □ A □ □ -000		
		150V/300V, 1A	WE1MA-A □ G □ □ -000		
		150V, 1A	WE1MA-A □ 2 □ □ -000		
		300V, 1A	WE1MA-A □ 4 □ □ -000		
		1A	WE1MA-A □ 6 □ □ -000		
		Current (max. demand, demand, instantaneous), power (max. demand, demand, instantaneous), voltage, power factor, frequency, reactive power, power level, reactive power level, harmonic effective value, distortion, harmonic content rate, and leakage current	Single-phase/2-wire + leakage current, Single-phase/3-wire + leakage current 3-phase/3-wire+leakege current or all common	150/300V, 5A	WE1MA-A □ F □ □ -000
				150V, 5A	WE1MA-A □ 1 □ □ -000
				300V, 5A	WE1MA-A □ 3 □ □ -000
5A	WE1MA-A □ 5 □ □ -000				
150V	WE1MA-A □ 9 □ □ -000				
300V	WE1MA-A □ A □ □ -000				
150/300V, 1A	WE1MA-A □ G □ □ -000				
150V, 1A	WE1MA-A □ 2 □ □ -000				
300V, 1A	WE1MA-A □ 4 □ □ -000				
1A	WE1MA-A □ 6 □ □ -000				
	Type given above and ZCT50A				
	Type given above and ZCT100A				
	Type given above and ZCT200A				
	Type given above and ZCT400A				
	Type given above and ZCT600A				
	Type given above and ZCT100A (outdoor)				
Current (max. demand, demand, instantaneous), power (max. demand, demand, instantaneous), voltage, power factor, frequency, reactive power, apparent power, power level, reactive power level, harmonic effective value, distortion, and harmonic content rate	3-phase, 4-wire	150/√3V or 300/√3V common, 5A	WE1MA-A4F □ □ -000		
		150/√3V, 5A	WE1MA-A41 □ □ -000		
		300/√3V, 5A	WE1MA-A43 □ □ -000		
		5A	WE1MA-A45 □ □ -000		
		150/√3V, 5A	WE1MA-A49 □ □ -000		
		300/√3V, 5A	WE1MA-A4A □ □ -000		
		150/√3V or 300/√3V common, 1A	WE1MA-A4G □ □ -000		
		150/√3V, 1A	WE1MA-A42 □ □ -000		
		300/√3V, 1A	WE1MA-A44 □ □ -000		
		1A	WE1MA-A46 □ □ -000		
		440/√3V, 5A	WE1MA-A4B □ □ -000		
		440/√3V, 1A	WE1MA-A4C □ □ -000		

■ Type number nomenclature

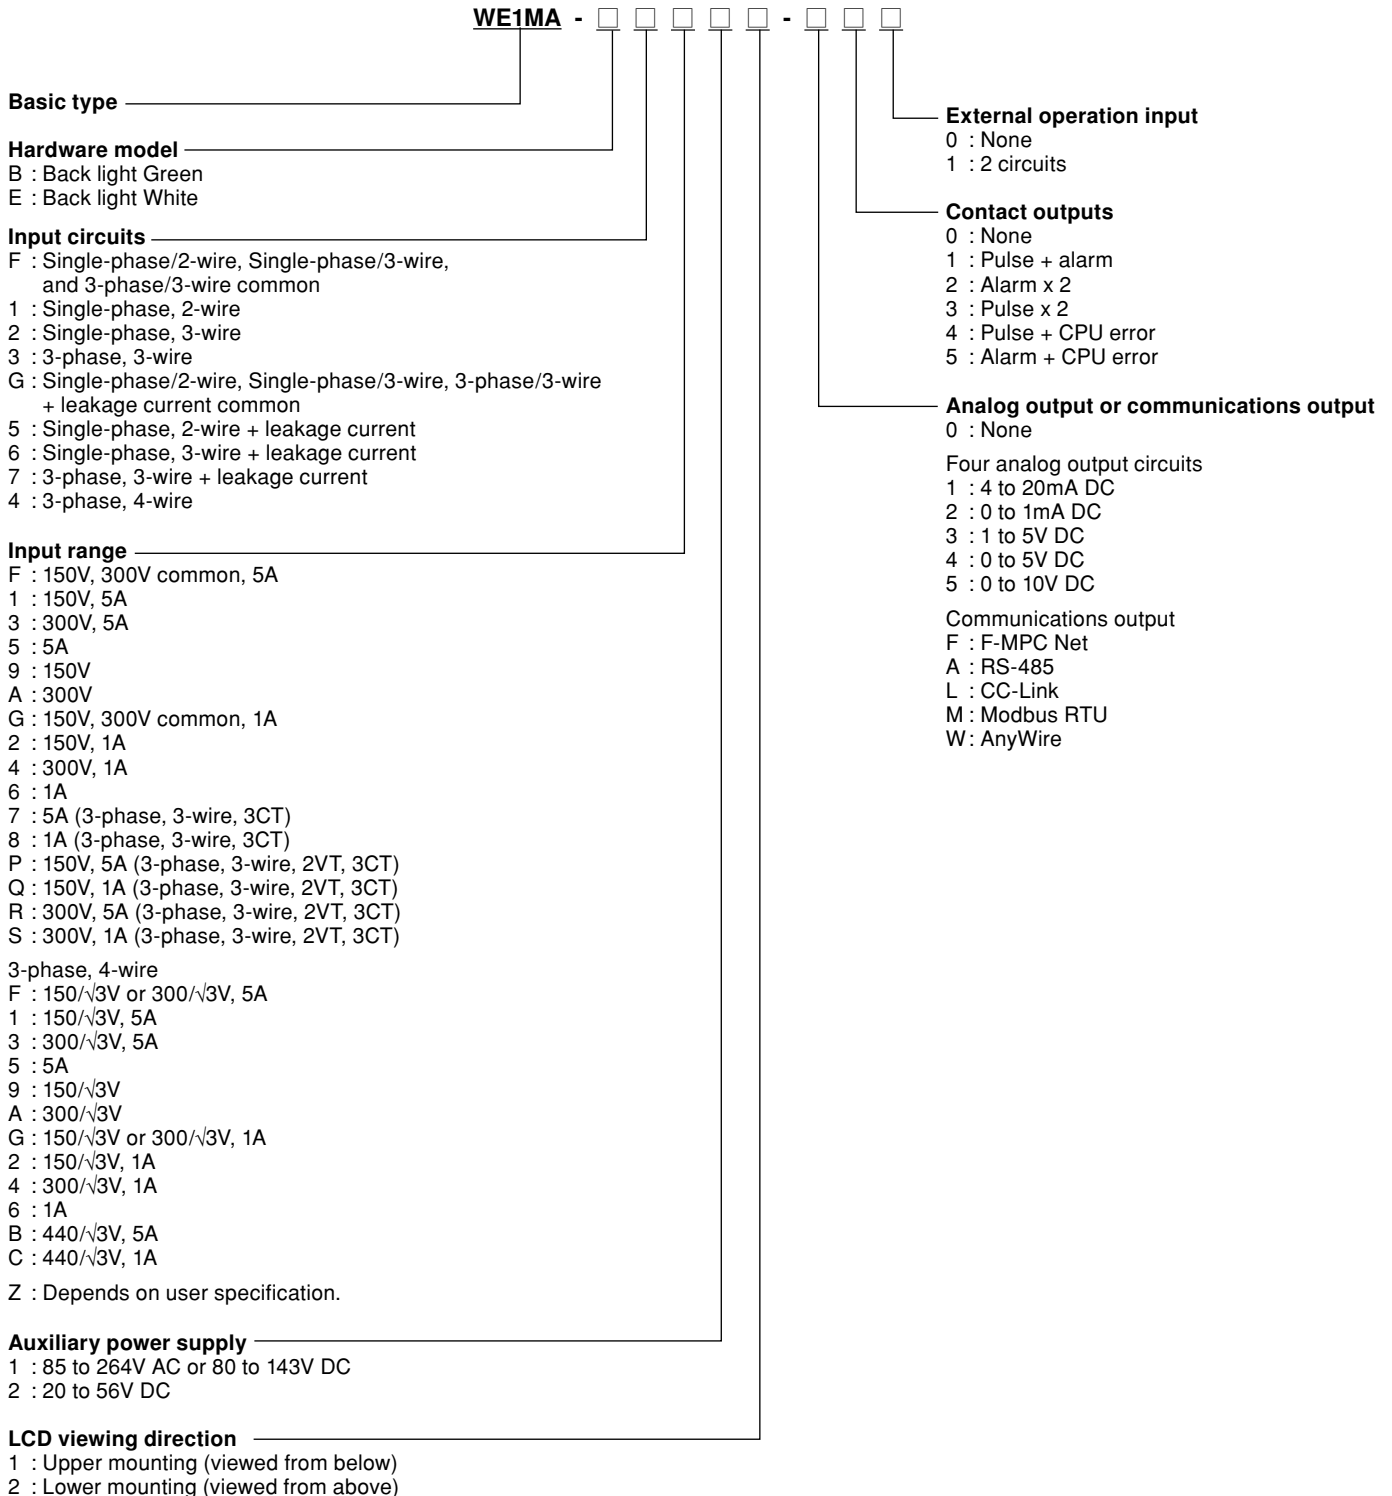

■ Specifications and performance

● Standard specifications and performance

Item	Specification							
Measurements	Measurement	Display error	Output error	Measurement	Display error	Output error		
	Voltage (34 ranges)	±1.0%	±0.5%	nth harmonic effective value	Voltage, current	±1.5%	±1.5%	
	Current (76 ranges)	±1.0%	±0.5%	nth harmonic content rate	Voltage	±1.0%	±2.5%	
	Power	±1.0%	±0.5%		Current	±2.5%	±2.5%	
	Reactive power	±1.0%	±0.5%	5th harmonic conversion effective value	Voltage, current	±1.5%	±1.5%	
	Apparent power *1	±1.0%	±0.5%	5th harmonic conversion effective value	Voltage	±1.0%	±2.5%	
	Power factor	±2.0%	±2.0%		Current	±2.5%	±2.5%	
	Frequency	±0.5%	±0.5%	Power level	Power factor of 1	±2.0%	±2.0%	
	Leakage current Io method, Igr method		±2.5%*2	±2.5%*2	Power factor of 0.5	±2.5%	±2.5%	
					Reactive power level	Power factor of 1	±2.5%	±2.5%
	Fundamental wave effective value	Voltage	±1.5%	±1.5%	Reactive power level	Power factor of 0.87	±2.5%	±2.5%
		Current	±1.5%	±1.5%	*1 For 3-phase/4-wire only			
	Distortion	Voltage	±1.0%	±2.5%	*2 Error for ZCT is not included. It is ± 0.0025A (ZCT primary) at a leakage current detection sensitivity current of 0.1A max.			
Current		±2.5%	±2.5%					
Time limit setting	Demand current	0s, 5s, 10s, 20s, 30s, 40s, 50s, 1min, 2min, 3min, 4min, 5min, 6min, 7min, 8min, 9min, 10min, 15min, 20min, 25min, 30min (95% time limit)						
	Demand power							
	Harmonic measurement	Average time limit: 0min, 1min, 2min, 5min, 10min, 15min, 30min (average measurement)						
Bar graph error	±10% (% of span)							
Temperature effect	23±10°C permissible differential							
Conforming standards	JIS C 1102-1, -2, -3, -4, -5, -7(1997), JIS C 1111(1985), JIS C 1216(1995), JIS C 1263(1995), JIS C8374(1991), EIA standard RS-485							
Display refresh time	Approx. 1s (approx. 0.25s for a bar graph) (For current leakage measurement, the refresh time is 2s max. for the digital display and the bar graph and 10s for the digital display and the bar graph for harmonic measurement.)							
Display elements and composition	Liquid crystal display	Main monitor	Character height: 11mm, 5 digits					
		Sub-monitor on left	Character height: 6mm, 4 digits					
		Sub-monitor in center and on right	Character height: 6mm, 5 digits					
		Bar graph	20 dots					
LCD viewing angle	Standard item	Upper mounting (viewed from below): top: 10°, bottom: 60°, left/right: 60°						
	Special items	Lower mounting (viewed from above): top: 60°, bottom: 10°, left/right: 60°						
Backlight	LED backlight: Green or White, always ON, automatically turns OFF (after 5min with no operation), can be set to always OFF.							
Input power consumption (VA)	Voltage circuit	0.2VA max.						
	Current circuit	0.1VA max. (5A, 1A)						
Overload resistance	Voltage circuit	2 x rated voltage for 10s, 1.2 x rated current for continuous						
	Current circuit	40 x rated voltage for 1s, 20 x rated current for 4s, 10 x for 16 s, 1.2 x rated current for continuous						
	Power supply power	1.5 x rated voltage for 10s, 1.2 x rated current for continuous, 1.5 x rated voltage for 10s at 110V DC, 1.3 x rated voltage for continuous at 110V DC						
Insulation resistance JIS C 1102-1 JIS C 1111	Between electrical circuits and external cabinet (ground)				50MΩ min. with 500V DC tester			
	Between inputs, outputs, and auxiliary power supply							
	Between outputs (analog, communication, pulse, or alarm)							
	Between pulse outputs							
	Between alarm outputs							
	Analog outputs (negative common) are not isolated.							
Withstand voltage JIS C 1102-1 JIS C 1111	Between electrical circuits and external cabinet (ground)				2000V AC (50/60Hz), 1min.			
	Between inputs, outputs, and auxiliary power supply							
	Between outputs (analog, communication, pulse, or alarm)							
	Between pulse outputs							
	Between alarm outputs							
	Analog outputs (negative common) are not isolated.							
Impulse withstand voltage JIS C 1111	Between auxiliary power supply and cabinet (ground) (only with leakage current measurement)				7kV, 1.2/50μs, positive and negative polarity, three times each			
	Between electrical circuits (except analog outputs and communications outputs) and cabinet (ground)							
	Between analog outputs or communications outputs and cabinet (ground)							

Item	Specification		
Analog outputs	No. of outputs	4 circuits	
	Output specifications	4 to 20mA DC (550Ω max.) 0 to 5V/1 to 5V DC (600Ω min.) 0 to 10V DC (2kΩmin.) 0 to 1mA DC (10kΩ max.) Specify any one of the above.	
	Supported output elements	Voltage (RS-ST-TR), current (R-S-T), demand current (R-S-T), power, demand power, reactive power, apparent power, power factor, frequency, leakage current, distortion, fundamental wave effective value, 5th harmonic conversion content rate (automatic switching to maximum phase A or V), 5th harmonic conversion effective value, nth harmonic content rate, nth harmonic effective value (for phases A and V)	
	Response time	1s max. (time until ±1% of the last steady value is reached), Harmonic measurement: 10s max., Current leakage measurement: 2s max.	
	Output ripple	Maximum of 2 x inherent error (% of output span)	
Outputs are not isolated (negative common).			
Pulse output**4	Power level or reactive power level Output method: Optical MOS-FET SPST-NO relay Contact capacity: AC/DC 125V, 70mA (resistive load/inductive load) Pulse width: 250±10ms (100 to 130ms depending on range setting and output pulse unit setting) The output pulse unit can be set in the following ranges. The output pulse unit will not change even if the measurement range is changed.		
	<ul style="list-style-type: none"> • 3-phase/3-wire, 3-phase/4-wire: Full load power (kW, kvar) = $\sqrt{3} \times \text{Rated voltage (V)} \times \text{Rated current (A)} \times 10^{-3}$ • Single-phase/3-wire: Full load power (kW, kvar) = $2 \times \text{Rated voltage (V)} \times \text{Rated current (A)} \times 10^{-3}$ • Single-phase: Full load power (kW, kvar) = $\text{Rated voltage (V)} \times \text{Rated current (A)} \times 10^{-3}$ 		
	Full load power (kW, kvar)	Output pulse unit (kWh (kvarh)/pulse)	
	Less than 1	0.1	
	1 min. to less than 10	1	
	10 min. to less than 100	10	
	100 min. to less than 1,000	100	
	1,000 min. to less than 10,000	1,000	
	10,000 min. to less than 100,000	10,000	
	100,000 min. to less than 1,000,000	100,000	
Alarm output**4	Alarm elements: Set any of the following: demand current, demand power, leakage current, 5th harmonic conversion content rate, nth harmonic content rate, distortion, voltage, alarm OFF. Reset method: Automatic reset or manual reset (setting) Contact delay time: 0 to 300s (1s steps) Output contacts: No-voltage NO (OR output of each phase) Contact capacity: 250V AC 8A, 125V DC 0.3A (resistive load), 250V AC 2A, 125V DC 0.1A (inductive load)		
	Alarm elements	Item Specification	
	Demand current	Function	Alarm display and alarm output when demand measurement value ≥ upper-limit set value
		Setting accuracy	±1.0% (% of full scale)
		Setting range	5% to 100% of max. scale value (1% steps)
	Demand power	Setting accuracy	±1.0% (% of full scale)
		Setting range	5% to 100% of max. scale value (1% steps)
	Leakage current (only with leakage current management)	Sensitive current	Greater than 50% to 100% of rated sensitive current
		Rated sensitive current	0.03A/0.05A/0.1A/0.2A/0.4A/0.8A
		Operation time	Time delay type (greater than 0.1s to 2s max.)
		Test function	Detection of leakage current can be tested in test mode.
	5th harmonic conversion content rate	Function	Alarm display and alarm output (detection at maximum phase) when measurement value ≥ Upper-limit set value
		Setting accuracy	Current: ±2.5%, Voltage: ±1.0%, as percentage of content rate
		Setting range	Current 5th harmonic conversion content rate, nth harmonic content rate (n = 3, 4, 5, 7, 9, 11, 13, or 15), distortion 5% to 100% (1% steps) Voltage 5th harmonic conversion content rate, nth harmonic content rate (n = 3, 4, 5, 7, 9, 11, 13, or 15), distortion 5% to 20% (0.1% steps)
	nth harmonic content rate	Detection characteristics	Average value mode: Detection when the average measurement value exceeds the setting given above
			Inverse time limit mode: Detection according to inverse time limit characteristics of instantaneous value (only for 5th harmonic conversion content rate)
	Distortion	Function	Alarm display and alarm output (detection for maximum phase) when measurement value ≥ upper-limit set value Alarm display and alarm output (detection for minimum phase) when measurement value ≥ lower-limit set value
		Setting accuracy	±1.0% (with full scale as 150%)
		Setting range	30% to 150% (1% steps) with full scale as 150%
	CPU error output**4	Detection item (self-diagnosis item), OR output of detection items	Contact configuration Capacity
(1) Watchdog timer (internal and external), (2) RAM check error, (3) A/D conversion error		OR output of detection items NC contact 250V AC 5A, 125V DC 0.2A (resistive load), 250V AC 1.5A (inductive load)	

*3 The multiplying factor is 0.01, but 0.1 is displayed for the multiplying factor.

**4 (Four digits are displayed for the integer portion, and four digits are displayed below the decimal point for the expanded display.)

**4 A combination of two of the following outputs can be used: pulse output, alarm output, and CPU error output (only one CPU error output can be used).

Item	Specification	
External operation input	No. of inputs	2 circuits and functions (4 types) switchable using settings
	External reset	The alarm output or maximum/minimum value can be reset by adding an external voltage signal. Alarm output reset and maximum/minimum value reset can be switched using settings. The input has the same ratings as the auxiliary power supply.
	External display switching	The display can be switched by adding an external voltage signal. Measurement element switching and phase switching can be set. The input has the same ratings as the auxiliary power supply.
	Minimum operation pulse width: 300ms continuous application supported (1) 100/110V AC 0.4 VA, 200/220V AC 1.4VA, 100/110V DC 0.4W, Accepts both AC and DC. Contact capacity: Approx. 3mA (100/110V AC/DC), approx. 6mA (200/220V AC) (2) 24V DC 0.3W, 48V DC 1.2W, Contact capacity: Approx. 10mA (24 V DC), approx. 20mA (48V DC)	
Vibration and shock resistance JIS C 1102-1 JIS C 0040, 0041	Vibration: 0.15mm single amplitude, 10 to 55Hz, 1 octave per minute for 5 sweeps Shock: 490m/s ² , three times each in X, Y, and Z directions	
Operating temperature and humidity range	-10 to 55°C, 30% to 85% RH (no condensation)	
Storage temperature range	-25 to 70°C	

• Communications specifications

Communications specification	Item	Specification		
F-MPC Net	Standard	EIA RS-485 (1983)	Cable length	1000m (total length)
	Transmission method	2-wire half-duplex	Address	1 to 99 and not used (Loc)
	Synchronization method	Asynchronous	No. of connectable units	Up to 31 units per system (including other devices)
	Transmission speed	4800/9600/19200bps		
RS-485 communications output	RS-485, 2-wire half-duplex, asynchronous		Cable length	1000m (total length)
	Transmission speed	1200/2400/4800/9600/19200bps		Address
Modbus RTU communications output	Standard	EIA RS-485	Cable length	1000m (total length)
	Synchronization method	Asynchronous	Address	1 to 247 (31 units max. can be connected)
	Transmission speed	4800/9600/19200/38400bps		
CC-Link Ver.1.10	Transmission speed	156k/625k/2.5M/5M/10Mbps	No. of allocated stations	1 remote device station allocated
	Maximum transmission distance	1200m(156kbps) / 900m(625kbps) / 400m(2.5Mbps) / 160m(5Mbps) / 100m(10Mbps)		
	No. of connectable units	42 (if only this unit is used)		
AnyWire	Full quadruplex or full duplex total frame cyclic communications			
	Protocol	AnyWireBus protocol	Address settings	0 to 63 (full quadruplex), 0 to 15 (full duplex)
	Transmission speed	Full quadruplex: 7.8kHz (1km), 15.6kHz (500m), 31.3kHz (200m), 62.5kHz (100m) Full duplex: 7.8kHz (1km), 31.3kHz (200m) The values in parentheses are the maximum overall cable extension lengths.		
	No. of connectable units	Full quadruplex: 64, Full duplex: 16		

■ Measurement range

• Voltage measurement range (34 ranges)

150.0V (110V)	1500V (1100V)	18.00kV (13.2kV)	180.0kV (132kV)
150V (110V)	2400V (1650V)	18.00kV (13.8kV)	210.0kV (154kV)
300.0V (220V)	3000V (2200V)	24.00kV (16.5kV)	270.0kV (187kV)
300V (220V)	3.00kV (2200V)	25.00kV (18.4kV)	300.0kV (220kV)
500V (380V)	4500V (3300V)	30.0 kV (22kV)	400.0kV (275kV)
600V (440V)	4.50kV (3300V)	45.0 kV (33kV)	500.0kV (380kV)
600V (460V)	9000V (6600V)	90.0 kV (66kV)	750.0kV (550kV)
600V (480V)	9.00kV (6600V)	120.0 kV (77kV)	
1200V (880V)	15.00kV (11kV)	150.0 kV (110kV)	

• Current measurement range (76 ranges)

5.00A	20.00A	80.0A	250A	1.00kA	2.00kA	6.00kA	15.00kA
6.00A	20.0A	100.0A	300.0A	1200A	2500A	7500A	15.0kA
7.50A	25.00A	100A	300A	1.20kA	2.50kA	7.50kA	20.00kA
8.00A	25.0A	120.0A	400A	1500A	3000A	8000A	20.0kA
10.00A	30.00A	120A	500A	1.50kA	3.00kA	8.00kA	30.00kA
10.0A	30.0A	150.0A	600A	1600A	4000A	9.00kA	30.0kA
12.00A	40.0A	150A	750A	1.60kA	4.00kA	10.00kA	
12.0A	50.0A	200.0A	800A	1800A	5000A	10.0kA	
15.00A	60.0A	200A	900A	1.80kA	5.00kA	12.00kA	
15.0A	75.0A	250.0A	1000A	2000A	6000A	12.0kA	

- Current display sensitivity: Sets the full scale of the current meter. The sensitivity can be set to between 40% and 120% of the CT ratio.

- Power (apparent power range)
480W to 1000MW range selection, maximum scale setting 40 to 115%
- Power factor
LEAD0.5 to 1 to LAG0.5 or LEAD0 to 1 to LAG0 range selection
- Reactive power
LEAD, LAG360var to 1000Mvar range selection, maximum scale setting 30% to 115%
- Frequency
45 to 55Hz or 55 to 65Hz, 45 to 65Hz range selection

■ Part names and functions

Bar graph display
Analog display of measurement value on main monitor
(Settings can be made for bar graph display of the measurement value on the sub-monitor.)

Digital display
Four elements can be measured and monitored at the same time.
• Main monitor
• Sub-monitor on right
• Sub-monitor in center
• Sub-monitor on left

Scale numbers
This is automatically set using the measurement range setting.

Upper limit or lower limit setting index
This displays the set value of the upper limit or lower limit.

Phase display

Unit display
This is automatically set using the measurement range setting.

Multiplying factor display
The multiplying factor is displayed in the lower right part of the main monitor when power level and reactive power level are displayed.

DISPLAY
Use this switch to toggle the phase display (between wires) for current (or voltage). After the display is switched, it will return to the original phase display (between wires) if there is no operation for 10 minutes. In setting mode, the switch is used to end setting mode.

+ **-**
Use this switch to switch the measurement display elements for the main monitor. After the display is switched, it will return to the original measurement display element if there is no operation for 10 minutes. In setting mode, the switch is used to change set values.

MAX/MIN
Use this switch to toggle between the normal measurement display and the maximum/minimum measurement display.

MODE
Use this switch to toggle between normal measurement display and harmonic (voltage/current) display. In setting mode, the switch is used to switch setting items.


SET
This switch is used to toggle between a normal display (five integer digits) and an expanded display (two integer digits and three digits below the decimal point) for the total value of each power level. After the display is switched, it will return to a normal display if there is no operation for 10 minutes. The switch can also be used to switch into setting mode. When the switch is pressed for 3s or longer, the mode will switch to setting mode. In setting mode, the switch is used to enter set values.

RESET/SHIFT
Use this switch to reset alarms. The switch can also be used to reset maximum and minimum values for display of maximum and minimum measurements. In setting mode, the switch is used to move between setting items.


■ Wiring diagrams

• Single-phase/2-wire, Single-phase/3-wire, 3-phase/3-wire *4


(1) Single-phase, 2-wire

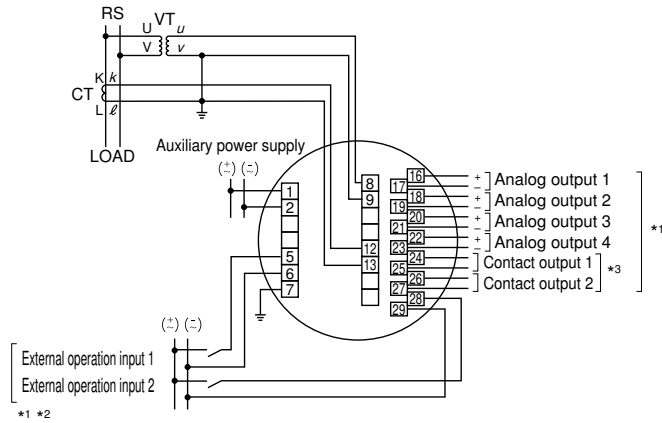


(2) Single-phase, 3-wire

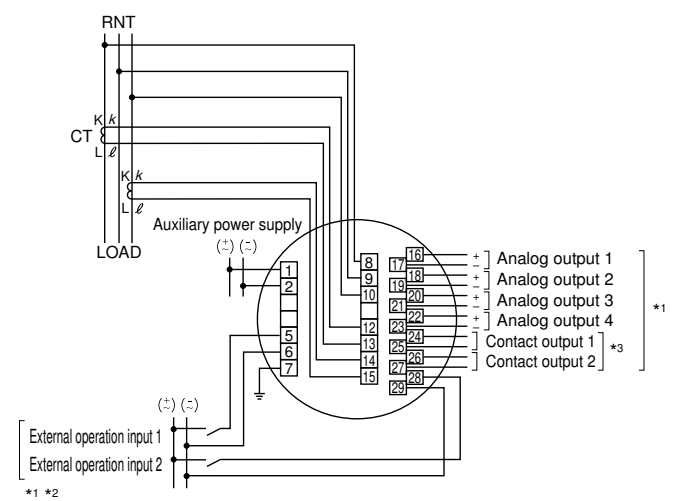


(3) 3-phase, 3-wire (2VT, 2CT)

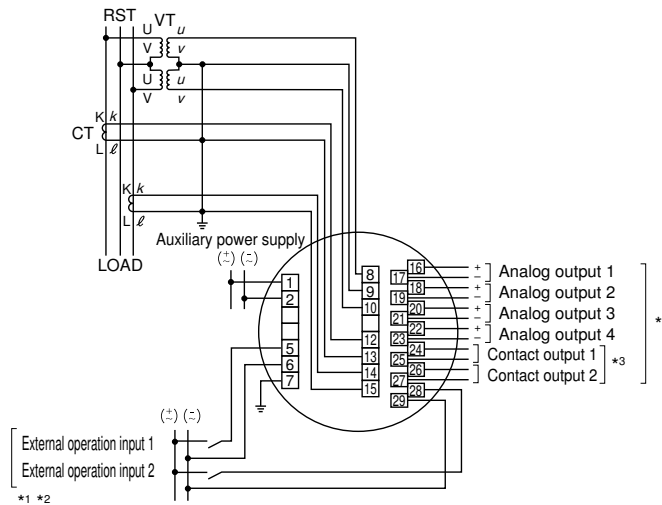


(4) 3-phase, 3-wire (2VT, 3CT)

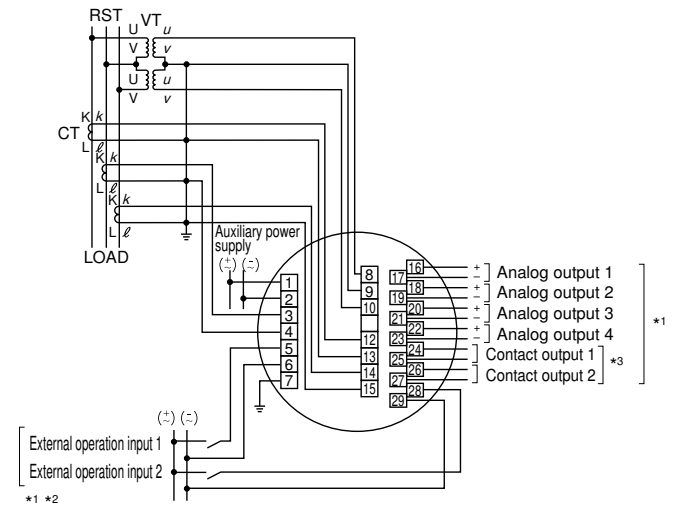


(5) Current input 3-phase, 3-wire (2CT)

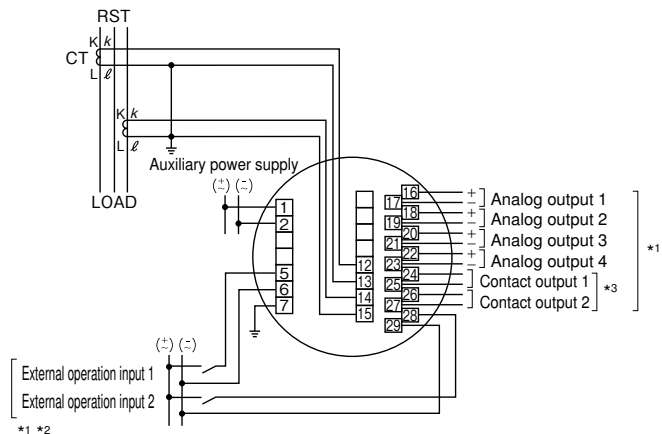


(6) Current input 3-phase, 3-wire (3CT)

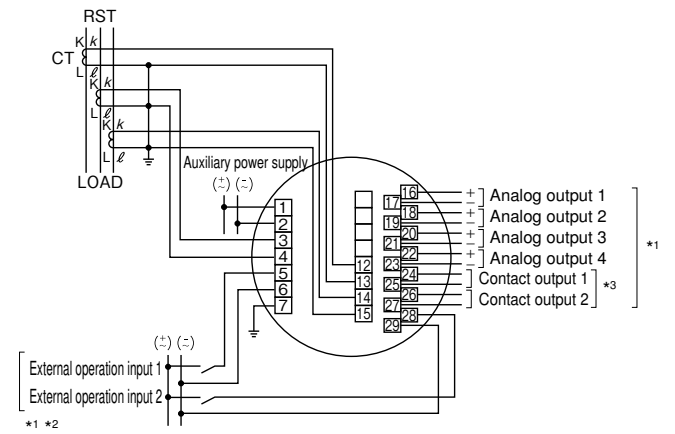


(7) Single-phase, 3-wire

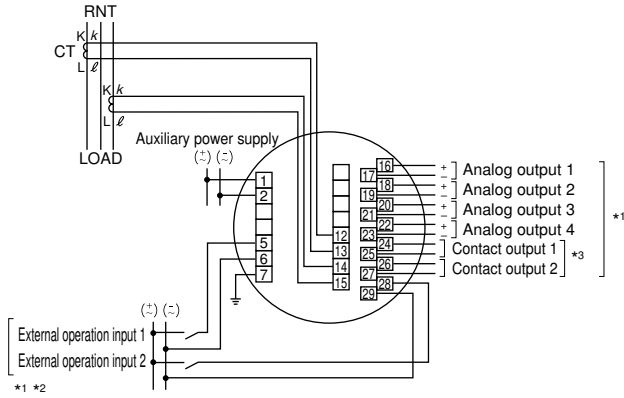


(8) Single-phase, 2-wire

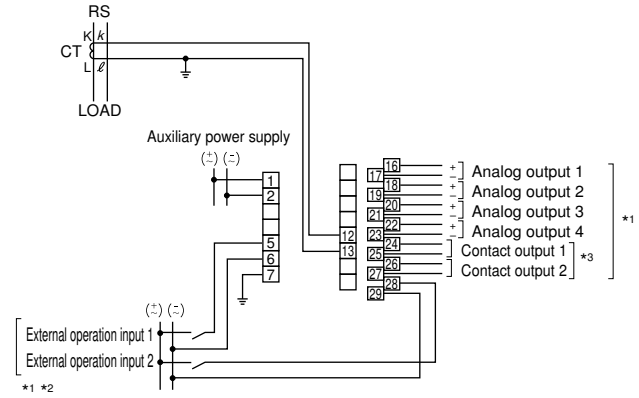


(9) Voltage input 3-phase, 3-wire

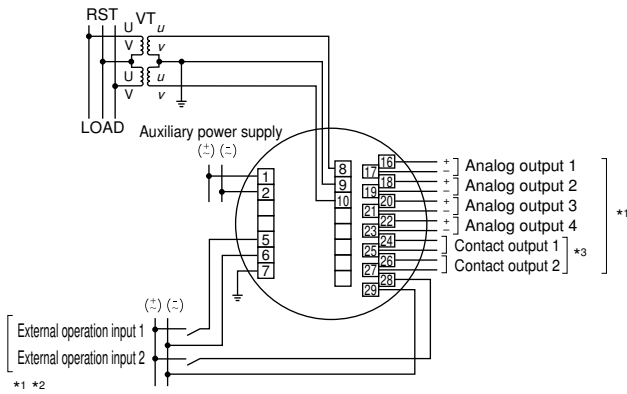

(10) Voltage input Single-phase, 3-wire

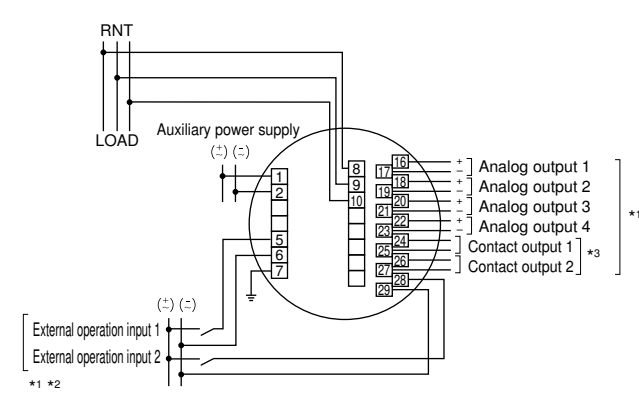

(11) Voltage input Single-phase, 2-wire

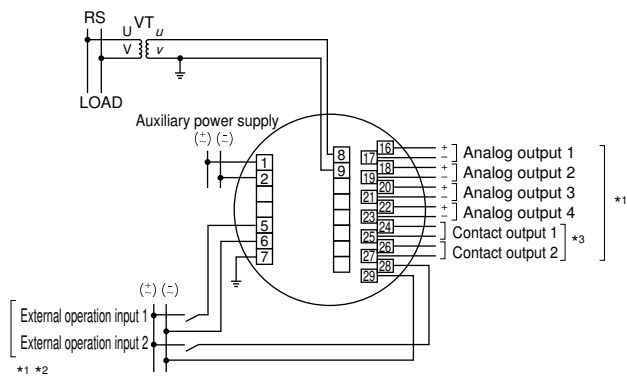


Notes:


- *1 Analog outputs, contact outputs, and external operation inputs are options.
- *2 Functionality for external operation input can be switched between external reset and external display switching by using settings.
- *3 For contact outputs, you can select from the following:
pulse outputs, alarm outputs, or CPU error output. (by user specification)
- *4 Secondary grounding for VT and CT is not required if a low-voltage circuit is used. Also, VT is not required if 110V or 220V direct input is used.

• **Wiring for monitoring leakage current of low-voltage circuit**


(1) Single-phase, 3-wire (N-phase ground)

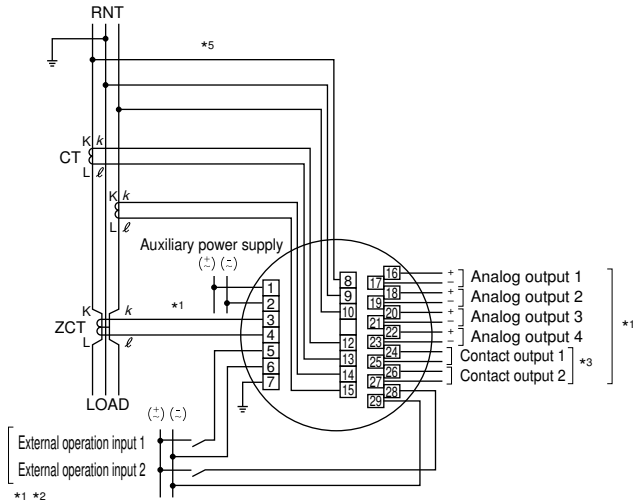

(2) 3-phase, 3-wire (S-phase ground)

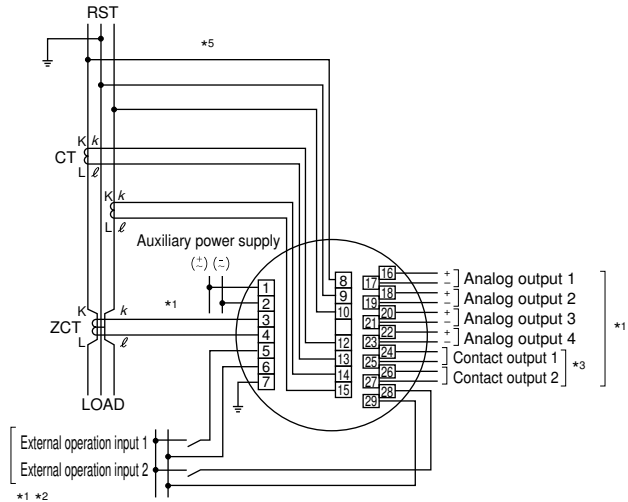

(3) 3-phase, 3-wire (no ground)

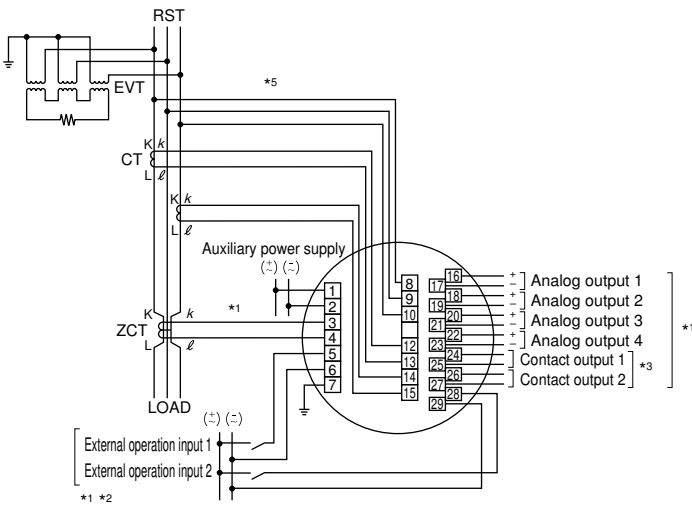


Notes:


- *1 Analog outputs, contact outputs, and external operation inputs are options. Models with zero-phase current input have only leakage current measurement.
- *2 Functionality for external operation input can be switched between external reset and external display switching by using settings.
- *3 For contact outputs, you can select from the following:
pulse outputs, alarm outputs, or CPU error output. (by user specification)
- *4 Secondary grounding for VT and CT is not required if a low-voltage circuit is used. Also, VT is not required if 110V or 220V direct input is used.
- *5 Voltage input is required when leakage current Igr is used.

• 3-phase, 4-wire *4


(1) Voltage and current input (2VT, 3CT)

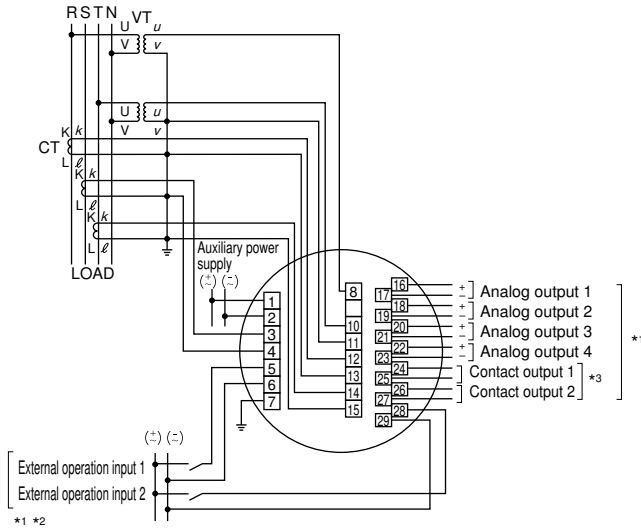


(2) Voltage and current input (3VT, 3CT)

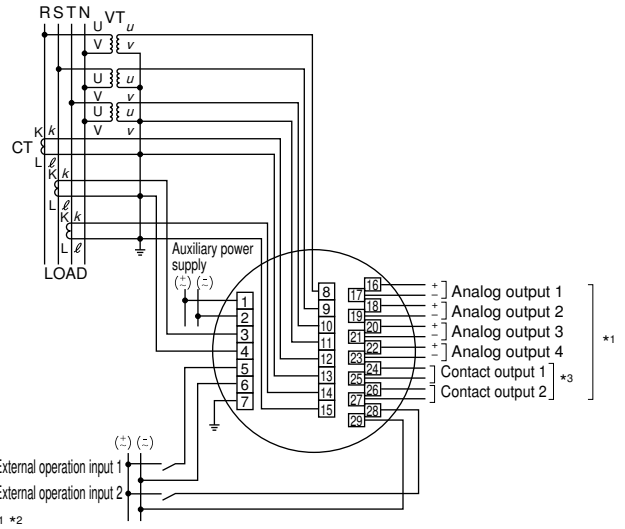


(3) Current input

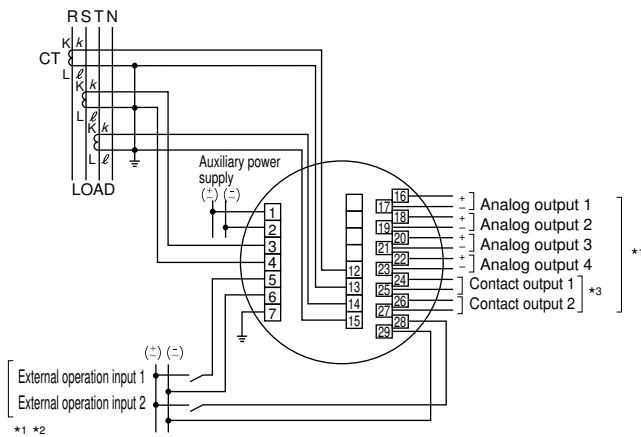

(4) Voltage input (2VT)

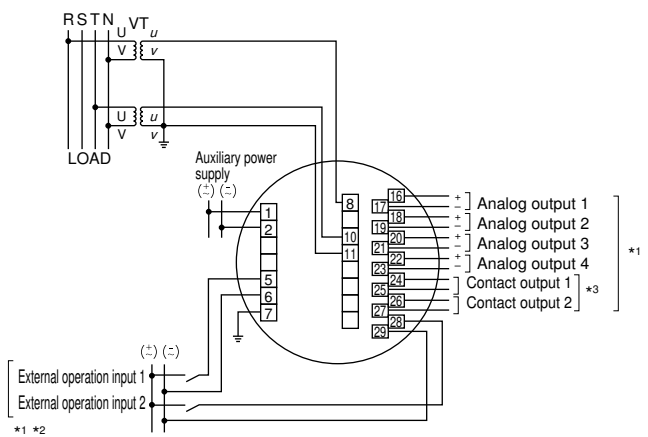

(5) Voltage input (3VT)

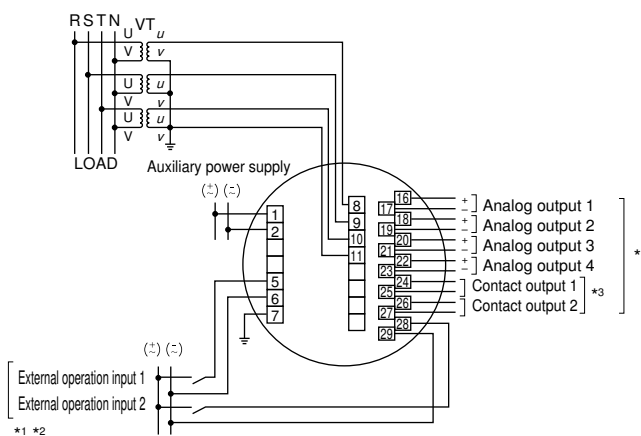

Notes:

- *1 Analog outputs, contact outputs, and external operation inputs are options.
- *2 Functionality for external operation input can be switched between external reset and external display switching by using settings.
- *3 For contact outputs, you can select from the following: pulse outputs, alarm outputs, or CPU error output. (by user specification)
- *4 Secondary grounding for VT and CT is not required if a low-voltage circuit is used. Also, VT is not required if 110V or 220V direct input is used.


• Communications output terminal arrangement

(1) F-MPC Net

(2) RS-485, Modbus RTU

(3) CC-Link

(4) AnyWire

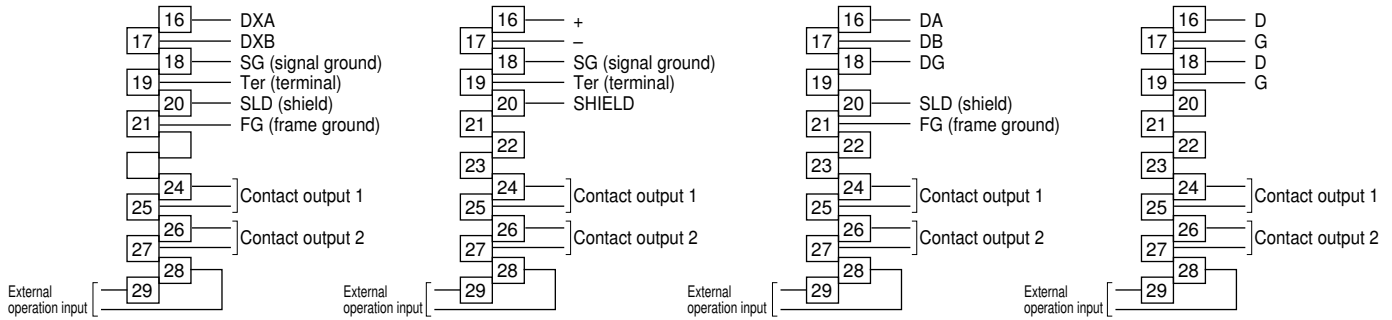


* Terminal resistance is connected internally by shorting terminal 17 (DXB) and terminal 19 (Ter).
(Connect the terminal resistance only on a device that is the terminal node in the connection configuration.)

• Mounting ZCT to ground wire (Be careful of ZCT polarity.) *4

(1) Single-phase, 3-wire (N-phase ground)

(2) 3-phase, 3-wire (S-phase ground)

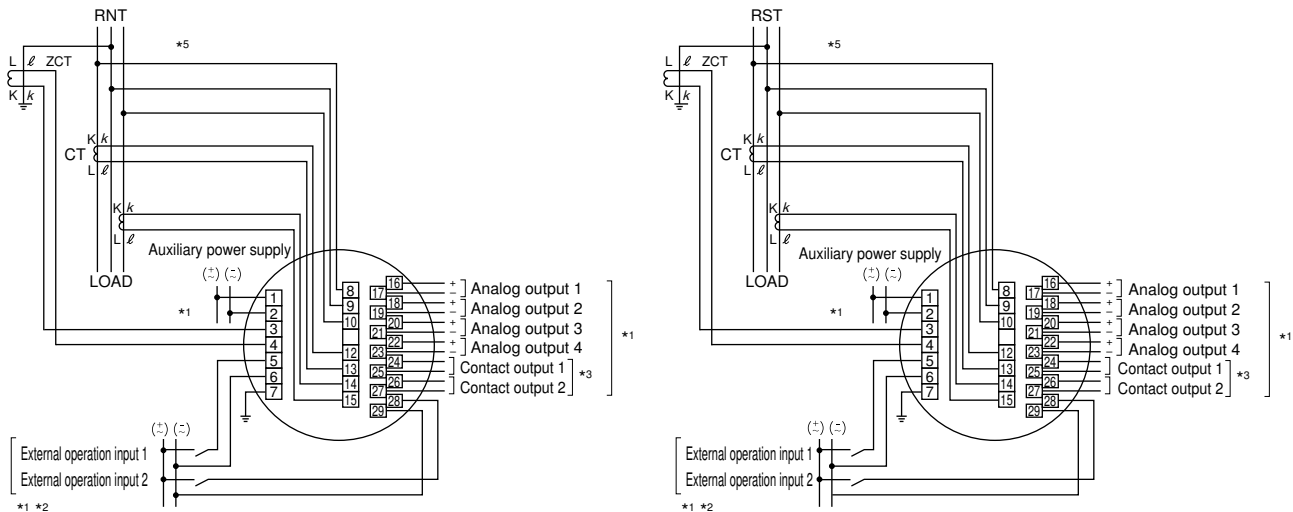

Notes:


- *1 Analog outputs, contact outputs, and external operation inputs are options. Models with zero-phase current input have only leakage current measurement.
- *2 Functionality for external operation input can be switched between external reset and external display switching by using settings.
- *3 For contact outputs, you can select from the following: pulse outputs, alarm outputs, or CPU error output. (by user specification)
- *4 Secondary grounding for VT and CT is not required if a low-voltage circuit is used. Also, VT is not required if 110V or 220V direct input is used.

• Contact output combinations

	Contact output combinations				
	Pulse + alarm	Alarm x 2	Pulse x 2	Pulse + CPU error	Alarm + CPU error
Contact output 1	Pulse output	Alarm output 1	Pulse output 1	Pulse output	Alarm output
Contact output 2	Alarm output	Alarm output 2	Pulse output 2	CPU error output	CPU error output

■ Dimensions and mounting precautions


• Dimensions, mm

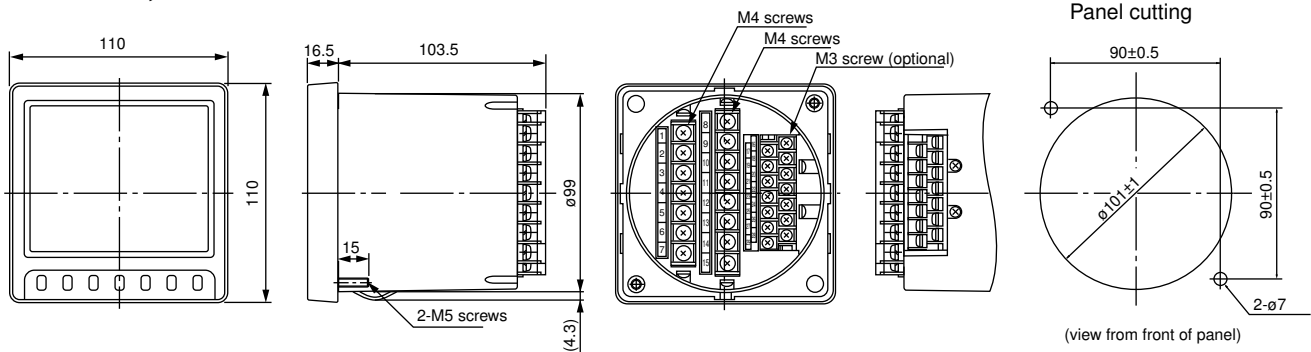


• Mounting precautions

(1) The contrast of the LCD display depends on the angle at which it is viewed. Mount the display at the proper angle and position.

Upper mounting

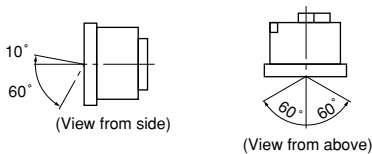


Lower mounting

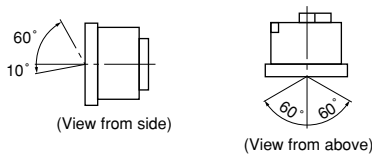


- (2) Use a mounting panel with a thickness of 10mm max. and mount the unit to the panel using the enclosed M5 nuts.
- (3) Use a tightening torque of 2.75 to 3.82 N·m.

■ ZCT dimensions, mm
(The following ZCT is used when enclosed.)


50A (Type: OTG-LA21)

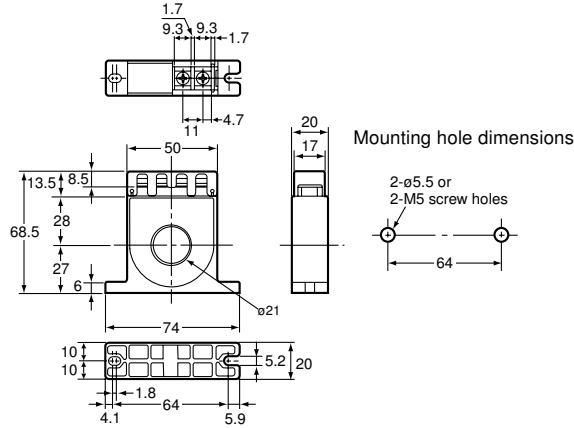


100A (Type: OTG-LA30A)

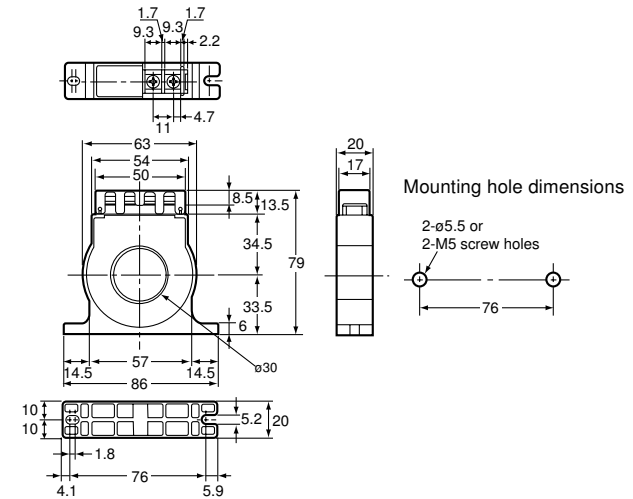


200A (Type: OTG-LA42)

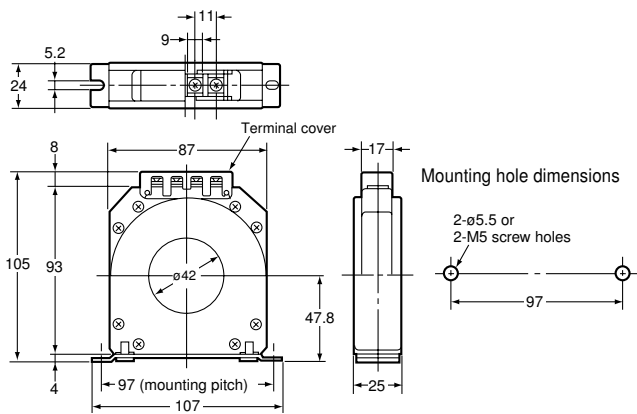


400A (Type: OTG-LA68)

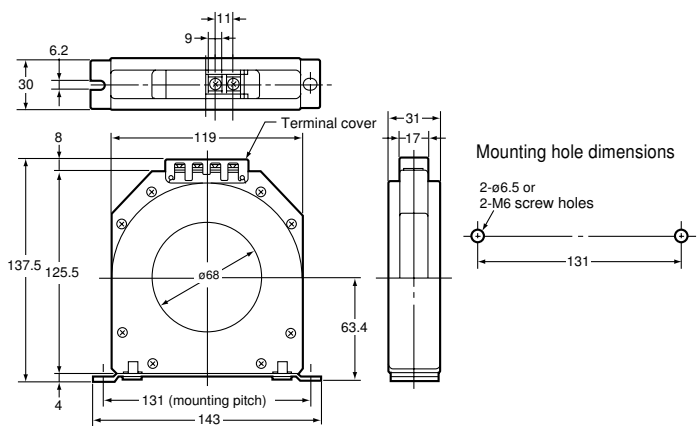

600A (Type: OTG-LA82)

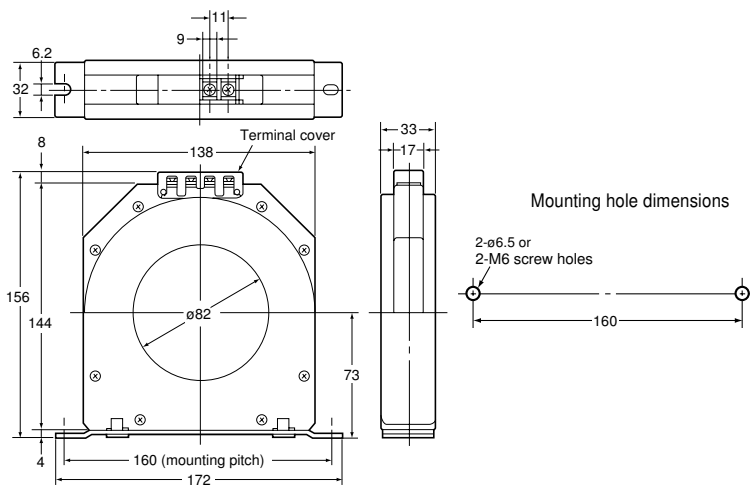

100A outdoor use (Type: OTG-LA30W)

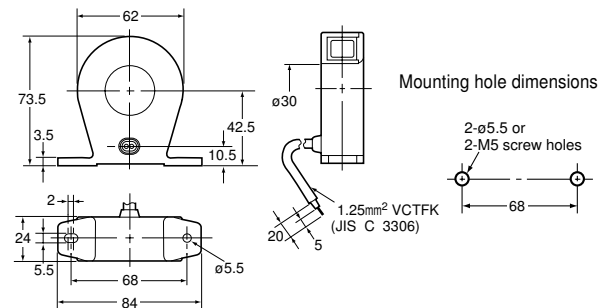


**F-type panel instruments
60mm to 120mm square**

■ Description

The F-type is both small in size and budget-priced. Since they take a minimum of installation space they are best suited for motor starter, control center and distribution board applications. Meter cases are made of a highly attractive and durable plastic.

■ Features

- Accuracy class: 2.5
- Meter scales are easy to read without error
- Compact design and budget-priced
- Meter accuracy is not affected by panel materials or adjacent current-carrying conductors
- Complies with requirements of JIS C1102
- Dielectric test: 3320V AC, 5sec.

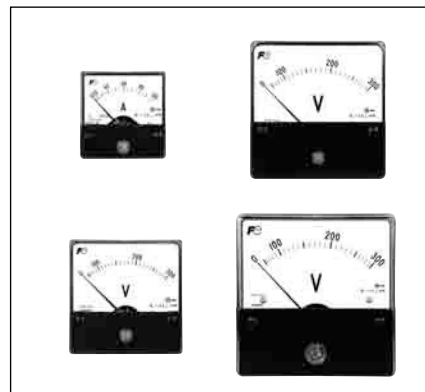

Meter	Description	60mm square Type	80mm square Type	100mm square Type	120mm square Type	
AC ammeter	For direct connection (up to 500V) Measuring range Extended range 0 – 500mA 0 – 500mA – 1.5A 0 – 1A 0 – 1A – 3A 0 – 3A 0 – 3A – 9A 0 – 5A 0 – 5A – 15A 0 – 7.5A 0 – 7.5A – 22.5A 0 – 10A 0 – 10A – 30A 0 – 15A 0 – 15A – 45A 0 – 20A 0 – 20A – 60A 0 – 30A 0 – 30A – 90A	• Operating principle: Moving iron • Power consumption: 1VA	FSN-60	FSN-80	FSN-100	FSN-120
	For connection to CT Measuring range Extended range 0 – X (A) 0 – X – 3X CT ratio: X/5 (X: CT primary current)					
	For direct connection (up to 500V) Measuring range 0 – 100µA 0 – 40mA 0 – 500µA 0 – 50mA 0 – 1mA 0 – 60mA 0 – 3mA 0 – 75mA 0 – 5mA 0 – 100mA 0 – 10mA 0 – 150mA 0 – 20mA 0 – 200mA 0 – 25mA 0 – 250mA 0 – 30mA 0 – 300mA	• Operating principle: Rectifier • Power consumption: 1VA	FRN-60	FRN-80	FRN-100	FRN-120
	For connection to MR-CTN Measuring range 0 – 400mA 0 – 1A 0 – 500mA 0 – 2A 0 – 600mA 0 – 2.5A 0 – 750mA 0 – 3A					
AC voltmeter	For direct connection Measuring range 0 – 150V 0 – 300V 0 – 600V Series resistor to be mounted externally	• Operating principle: Moving iron • Power consumption 0 – 150V, 0 – 300V: 5VA 0 – 600V: 10VA	FSN-60	FSN-80	FSN-100	FSN-120
	For connection to VT Measuring range 0 – 600V 0 – 4.5kV 0 – 9kV					


Meter	Description	60mm square Type	80mm square Type	100mm square Type	120mm square Type
AC voltmeter	For direct connection Measuring range 0 – 10V 0 – 60V 0 – 15V 0 – 75V 0 – 20V 0 – 100V 0 – 25V 0 – 150V 0 – 30V 0 – 200V 0 – 40V 0 – 250V 0 – 50V 0 – 300V	FRN-60	FRN-80	FRN-100	FRN-120
		<ul style="list-style-type: none"> • Operating principle: Rectifier • Internal resistance: 1000 Ω/V 			
DC ammeter	For direct connection Measuring range 0 – 1mA 0 – 200mA 0 – 10A 0 – 3mA 0 – 500mA 0 – 15A 0 – 5mA 0 – 1A 0 – 20A 0 – 10mA 0 – 1.5A 0 – 30A 0 – 20mA 0 – 2A 0 – 50mA 0 – 3A 0 – 100mA 0 – 5A	FMN-60	FMN-80	FMN-100	FMN-120
	For connection to shunt Measuring range 0 – 50A 0 – 300A 0 – 75A 0 – 500A 0 – 100A 0 – X(A) 0 – 200A				
		<ul style="list-style-type: none"> • Operating principle: Moving coil • Shunt rating: 60mV 			
DC voltmeter	For direct connection Measuring range 0 – 1V 0 – 50V 0 – 3V 0 – 75V 0 – 5V 0 – 100V 0 – 10V 0 – 150V 0 – 15V 0 – 300V 0 – 30V	FMN-60	FMN-80	FMN-100	FMN-120
	For connection to series resistor Measuring range 0 – 500V 0 – 600V 0 – 750V 0 – 1kV 0 – 1.5kV 0 – 2kV				
		<ul style="list-style-type: none"> • Operating principle: Moving coil • Series resistor: Internal 500V: 500Ω 600V: 600Ω • Series resistor: External (3-terminal) 750V ~ 2kV 			
Single-phase 2-wire wattmeter	For connection to VT and CT Measuring range 0 – ZkW Z= 0.5 x X/5 x Y/110 Z: kWatt X: CT primary current Y: VT primary voltage	FRN-60W1	FRN-80W1	FRN-100W1	FRN-120W1
		<ul style="list-style-type: none"> • Operating principle: Power/DC transducing type Power consumption Current coil: 1VA (at 5A) Voltage coil: 3.5VA 			
3-phase 3-wire wattmeter	For connection to VT and CT Measuring range 0 – ZkW Z= 0.5 x X/5 x Y/110 Z: kWatt X: CT primary current Y: VT primary voltage	FRN-60W3	FRN-80W3	FRN-100W3	FRN-120W3
		<ul style="list-style-type: none"> • Operating principle: Power/DC transducing type Power consumption Current coil: 1VA (at 5A) Voltage coil: 3.5VA 			
3-phase 3-wire varmeter	For connection to VT and CT Measuring range 0 – Zkvar Z= 0.5 x X/5 x Y/110 Z: kvar X: CT primary current Y: VT primary voltage	FRN-60VR3	FRN-80VR3	FRN-100VR3	FRN-120VR3
		<ul style="list-style-type: none"> • Operating principle: Power/DC transducing type Power consumption Current coil: 1VA (at 5A) Voltage coil: 3.5VA 			



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

Meter	Description	60mm square Type	80mm square Type	100mm square Type	120mm square Type
3-phase 3-wire power factor meter (for balanced circuit)	For connection to VT and CT Measuring range Lead 0.5 – 1 – 0.5Lag VT ratio = Y/110V CT ratio = X/5A	FR-60PF3	FR-80PF3	FR-100PF3	FR-120PF3
Frequency meter	Measuring range 44 – 55Hz 110 or 220V 55 – 65Hz 110 or 220V 45 – 65Hz 110 or 220V	FRN-60F	FRN-80F	FRN-100F	FRN-120F


■ Type number nomenclature (Ordering code)

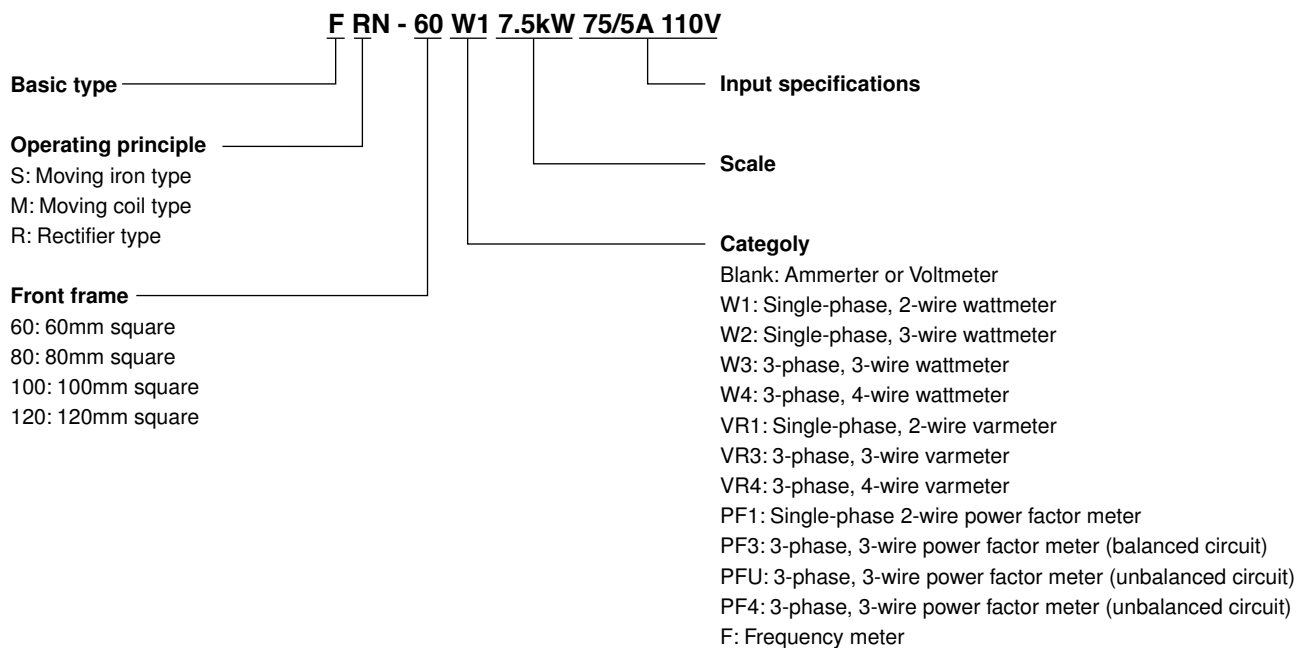

■ Ordering information

- Specify the following:
1. Type number (Ordering code)
 2. Measuring range
 3. Supply voltage and frequency
 4. Connection (When connecting to VT or CT, specify VT ratio or CT ratio)

■ Dimensions, mm
AC/DC ammeter, AC/DC voltmeter

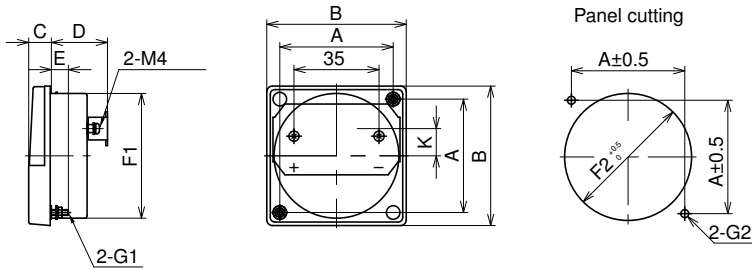


• Rectifier type

Type	A	B	C	D	E	F1	F2	G1	G2	K	Mass (g)
FRN • FMN-60	48	60	14.5	37.5	10	∅ 52	∅ 54 hole	M3 screw	∅ 4 hole	6	90
FRN • FMN-80	64	80	14.5	37.5	10	∅ 65	∅ 67 hole	M3 screw	∅ 4 hole	0	125
FRN • FMN-100	80	100	16	39	15	∅ 85	∅ 87 hole	M4 screw	∅ 5.5 hole	0	180
FRN • FMN-120	100	123	20	49.5	15	∅ 110	∅ 112 hole	M5 screw	∅ 7 hole	0	350

• Moving iron type


Type	A	B	C	D	E	F1	F2	G1	G2	K	Mass (g)
FSN-60	48	60	14.5	47.5	10	∅ 52	∅ 54 hole	M3 screw	∅ 4 hole	6	130
FSN-80	64	80	14.5	47.5	10	∅ 65	∅ 67 hole	M3 screw	∅ 4 hole	0	165
FSN-100	80	100	16	49.5	15	∅ 85	∅ 87 hole	M4 screw	∅ 5.5 hole	15	260
FSN-120	100	123	20	49.5	15	∅ 110	∅ 112 hole	M5 screw	∅ 7 hole	24	370

60/80mm square type
Wattmeter / Varmeter

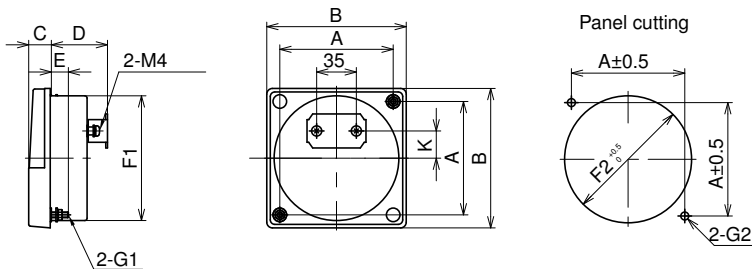


Type	A	B	C	D	E	F1	F2	G1	G2	K	Mass (g)
F□N-60	48	60	14.5	37.5	10	∅52	∅54 hole	M3 screw	∅4 hole	6	130
F□N-80	64	80	14.5	37.5	10	∅65	∅67 hole	M3 screw	∅4 hole	0	165



■ Dimensions, mm
100mm square type
Wattmeter / Varmeter / 3-phase, 3-wire power factor meter

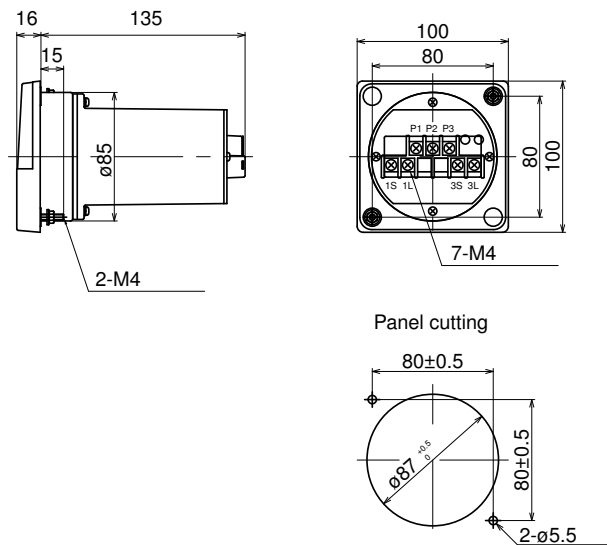


120mm square type
Wattmeter / Varmeter / 3-phase, 3-wire power factor meter

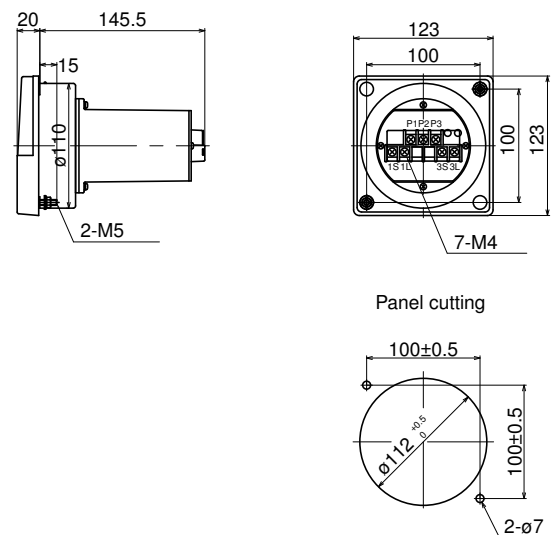


Series resistor for AC/DC voltmeter

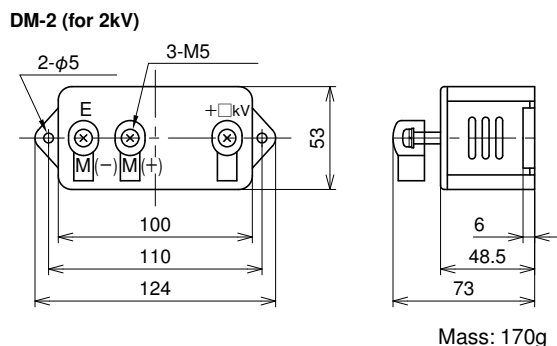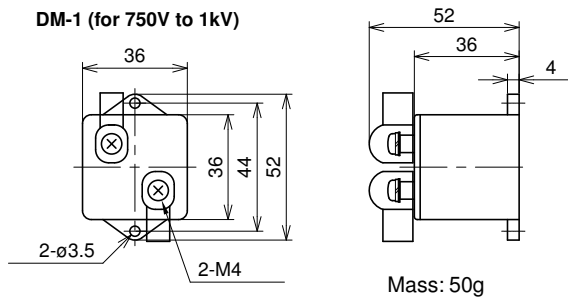

DM-5 to 25 (for 3 to 25kV)

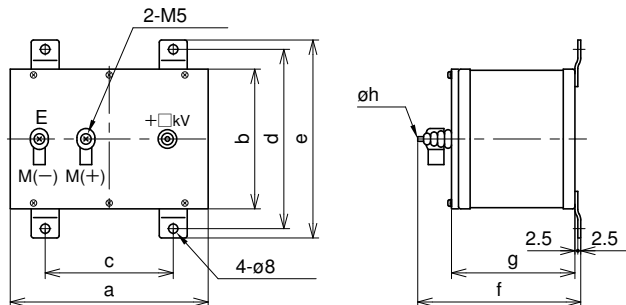

Series resistor for FSN-60, 80, 100, 120

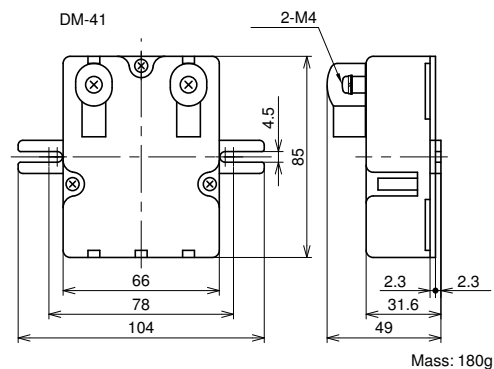


Type	Rating	a	b	c	d	e	f	g	h	Mass
DM-5	3 to 5kV	170	120	110	154	170	140	106	4	1.0kg or less
DM-10	6 to 10kV	220	160	140	194	210	140	106	4	1.5kg or less
DM-15	12 to 15kV	290	210	200	248	264	190	146	5	2.0kg or less
DM-20	20kV	390	260	300	294	310	220	176	5	3.0kg or less
DM-25	25kV	500	330	400	356	372	280	236	5	3.5kg or less


■ Dimensions, mm

DC converter

- For Single-phase, 2-wire wattmeter
- For 3-phase, 3-wire power factor meter (balanced circuit)
- For 3-phase, 3-wire wattmeter meter
- For 3-phase, 3-wire varmeter

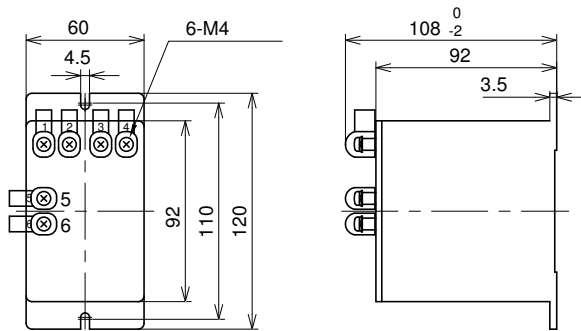

Mass: 500g


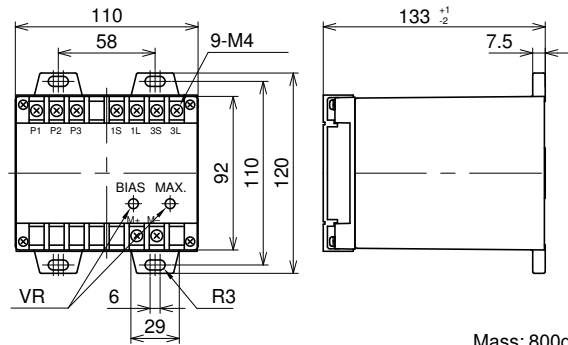


Mass: 800g

CT for AC ammeter

MR-CTN (0.35 to 25A/10mA)


MR-CTN (30 to 100A/20mA)

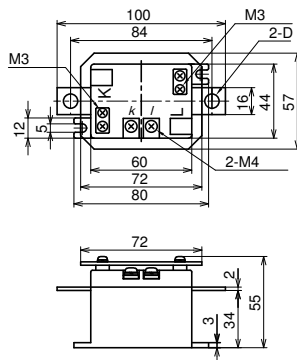

Mass: MR-CTN (0.35 to 25A/10mA) 160g
(30 to 100A/20mA) 200g


Current (A)	D
30 to 70	ø6.5
75 to 100	ø8.5

Frequency meter

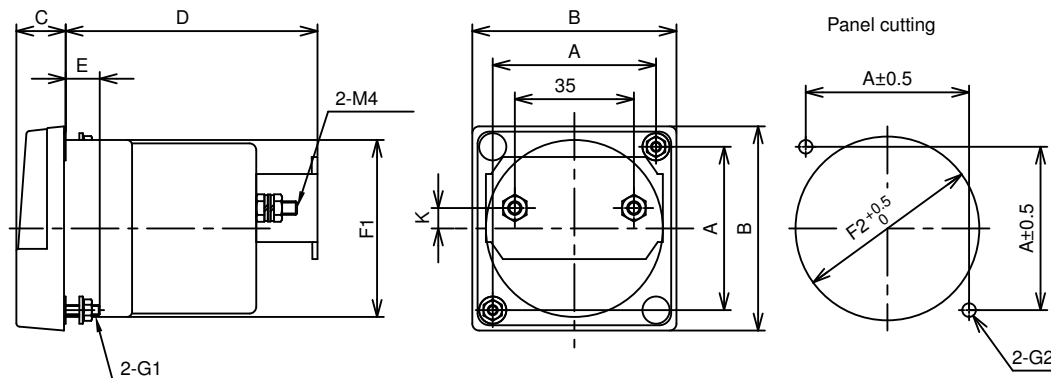

Type	A	B	C	D	E	F1	F2	G1	G2	K	Mass (g)
FRN-60F	48	60	14.5	74	10	ø52	ø54	M3 screw	ø4	6	150
FRN-80F	64	80	14.5	74	10	ø65	ø67	M3 screw	ø4	0	180
FRN-100F	80	100	16	75.5	15	ø85	ø87	M4 screw	ø5.5	0	300
FRN-120F	100	123	20	86	15	ø110	ø112	M5 screw	ø7	0	420


■ Wiring diagrams
Ammeter, voltmeter

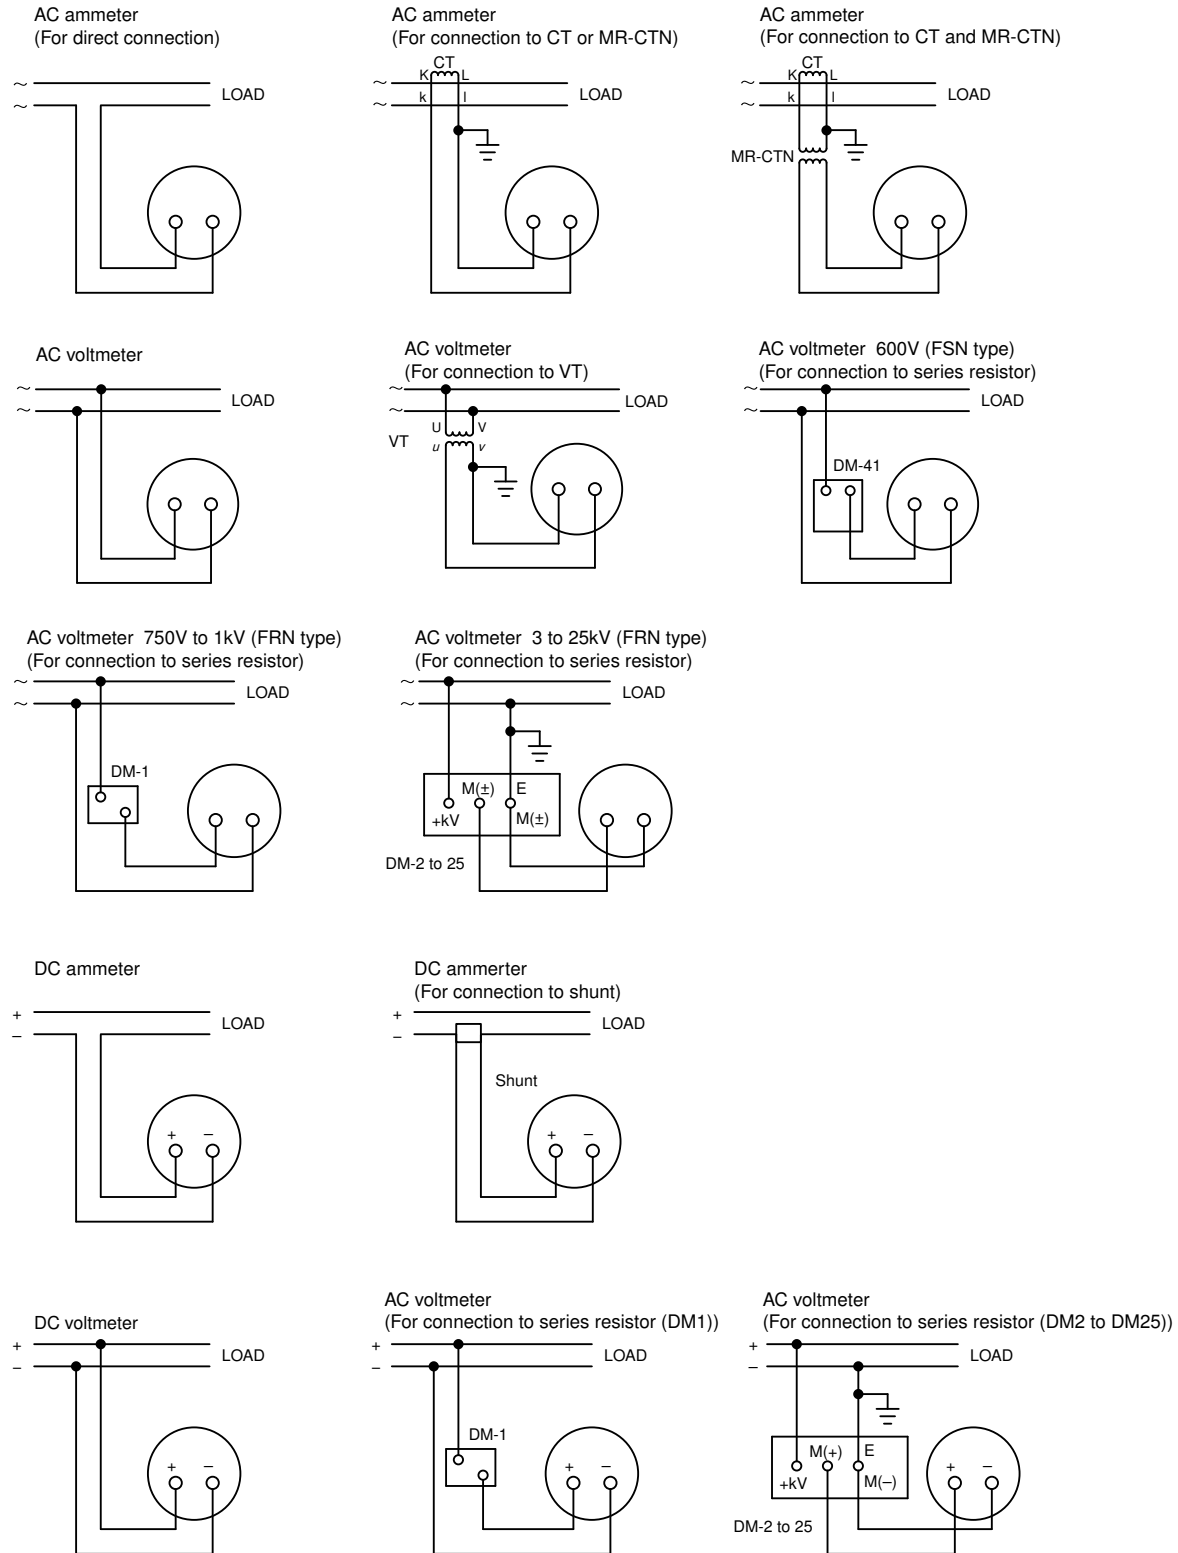


■ Wiring diagrams

Wattmeter


- FRN-60W1, FRN-80W1

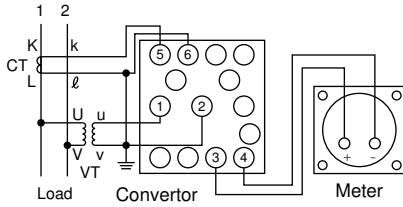


- FRN-60W3, FRN-80W3

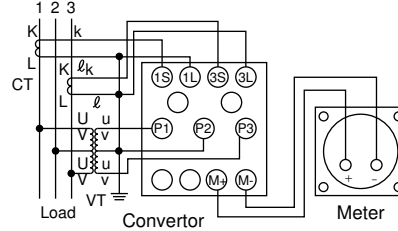

- FRN-100W1, FRN-120W1

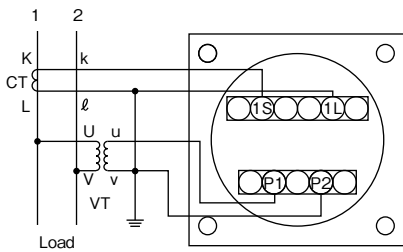


- FRN-100W3, FRN-120W3

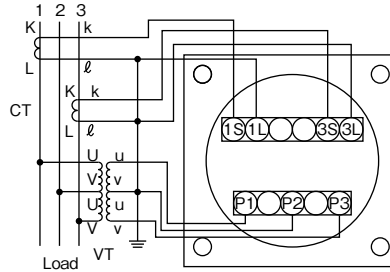


Varmeter

- FRN-60VR3, FRN-80VR3

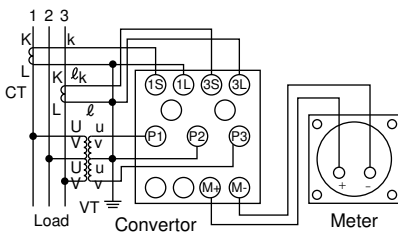


- FRN-100VR3, FRN-120VR3

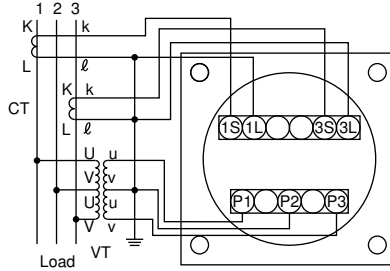


Power factor meter

- FRN-60PF3, FRN-80PF3

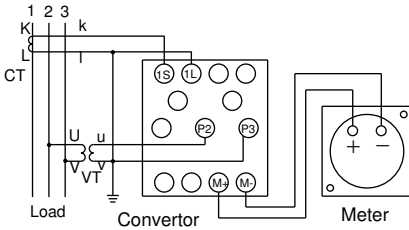


- FRN-100PF3, FRN-120PF3

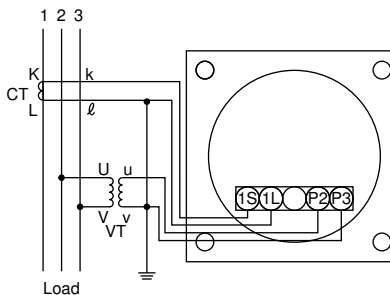


■ Wiring diagrams

Frequency meter
(For direct connection)



(For connection to VT)



C series transducers

■ Description

FUJI C series transducers are designed to convert various electrical characteristics of circuits into DC signals. Input and output circuits are isolated from each other. These transducers are ideal for handling the analog data input of microcomputer-incorporated control devices. Distorted waveforms from electronic power control devices can be accurately converted to DC signals with the innovative conversion methods used. (The r.m.s.-value method for voltage and current conversion, time-division multiplication for power conversion and differential method for frequency conversion.)


■ Features

- Superb-quality, high-reliability design
- Complete isolation between input and output
- Strong construction
- Provided with terminal protective covers

■ Specifications and types

• AC voltage and current transducers/CAC

Accuracy: 0.5%
 Response time: 1.3s or less
 Insulation resistance: 100MΩ, 500V megger
 Dielectric strength: 2000V AC, 1 min. between input and output circuits, between input circuit and power supply
 2000V AC, 1 min. between output circuit and power supply, output circuit and case (earth terminals)
 Ambient temperature and humidity: -10 to +50°C, 90% RH or less (no condensation)

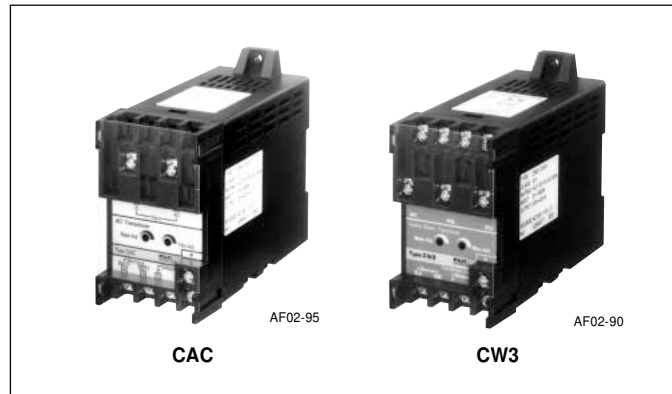


Input (AC)		Output (DC) (Load resistance)	Conversion method (▲)	Control (●) power supply	Type *
Voltage or current (□)	Power consumption				
AC voltage 0-150V 50/60Hz (150) 0-300V 50/60Hz (300)	0.45VA	1-5V (1kΩ or more) (A) 0-5V (1kΩ or more) (B) 0-10V (2kΩ or more) (C) 4-20mA (500Ω or less) (H)	Effective value method (1) Mean value method (2)	100/110V AC 50/60Hz (1) or 200/220V AC 50/60Hz (2)	CAC-□■●▲1
AC current 0-1A (010) 0-5A (050)	0.1VA	1-5V (1kΩ or more) (A) 0-5V (1kΩ or more) (B) 0-10V (2kΩ or more) (C) 4-20mA (500Ω or less) (H)	Effective value method (1) Mean value method (2)	Approx. power consumption 2VA	CAC-□■●▲1

Note: * Replace the marks □ ■ ● ▲ in the type number by codes indicated in parenthesis.


Input-output

Input	Output
0-1A	1-5V
0-5A	4-20mA
0-150V	
0-300V	



Input-output

Input	Output
0-1A	0-5V
0-5A	0-10V
0-150V	
0-300V	





MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

• Frequency transducers/CF1

Accuracy: 0.5%

Response time: 1s or less

Insulation resistance: 100MΩ or more, 500V megger

Dielectric strength: 2000V AC, 1 min. between input and output circuits, between input circuit and power supply

2000V AC, 1 min. between output circuit and power supply, output circuit and case (earth terminals)


Ambient temperature and humidity: -10 to +50°C, 90% RH or less (no condensation)

Input		Output (DC) (Load resistance) (■)	Control power supply (●)	Type *
Voltage and frequency (□)	Power consumption			
110V 45Hz–110V 55Hz(115) 110V 55Hz–110V 65Hz(116) 220V 45Hz–220V 55Hz(225) 220V 55Hz–220V 65Hz(226)	0.3VA	1–5V (1kΩ or more) (A) 0–5V (1kΩ or more) (B) 0–10V (2kΩ or more) (C) 4–20mA (600Ω or less) (H) 0–1mA (10kΩ or less) (J) 0–5mA (2kΩ or less) (K)	100/110V AC 50/60Hz (1) or 200/220V AC 50/60Hz (2) 24V DC ±10% (3) None (9) Approx. power consumption 2.1VA	CF1-□■●

Note: * Replace the marks □ ■ ● ▲ in the type number by codes indicated in parenthesis.


Input-output

Input	Output
45–55Hz	0–5V 0–10V
55–65Hz	0–1mA 0–5mA



Input-output

Input	Output
45–55Hz	1–5V 4–20mA
55–65Hz	



• Active and reactive power transducers/CW, CR


Accuracy: 0.5%
 Response time: 0.5s or less
 Insulation resistance: 100MΩ, 500V megger
 Dielectric strength: 2000V AC, 1 min. between input and output circuits, between input circuit and power supply
 2000V AC, 1 min. between output circuit and power supply, output circuit and case (earth terminals)
 Ambient temperature and humidity: -10 to +50°C, 90% RH or less (no condensation)

Description		Input (AC)						Output (DC)		Control	Type *	
Active or reactive power	Circuit	Voltage	Current	Power (□)	Frequency (●)	Power consumption		Load resistance	(▲) power supply			
						Voltage	Current					
Active power	Single phase 2-wire	110V	1A	0-100W (11)	50Hz (5)	Approx. 0.35VA	Approx. 0.2VA	1-5V (A)	100/110V AC (1)	CW1-□■●▲		
		110V	5A	0-500W (15)				0-5V (B)				
		220V	1A	0-200W (21)	60Hz (6)	Approx. 0.35VA (110V)	Approx. 0.2VA (5A)	0-5V (1kΩ or more) (S)	200/220V AC (2)			
		220V	5A	0-1kW (25)				0-5V (1kΩ or more) (C)				
		3-phase 3-wire	110V	1A	0-200W (11)	50Hz (5)	Approx. 2x0.35VA (110V)	Approx. 2x0.2VA (5A)	0-10V (2kΩ or more) (H)		24V DC±10% (3)	CW3-□■●▲
			110V	5A	0-1kW (15)				0-10V (2kΩ or more) (J)			
	220V		1A	0-400W (21)	60Hz (6)	Approx. 2x0.35VA (110V)	Approx. 2x0.2VA (5A)	4-20mA (600Ω or less) (K)	110V DC±10% Except CW4(4) (9)			
	220V		5A	0-2kW (25)				0-1mA (10kΩ or less) (J)				
	3-phase 4-wire	110V	1A	0-200W (11)	50Hz (5)	Approx. 3x0.35VA (110V)	Approx. 3x0.2VA (5A)	0-5mA (2kΩ or less) (K)	Approx. power consumption CW1: 1.8VA CW3: 1.9VA CW4: 2VA	CW4-□■●▲		
		110V	5A	0-1kW (15)				0-5mA (2kΩ or less) (K)				
		220V	1A	0-400W (21)	60Hz (6)	Approx. 3x0.35VA (110V)	Approx. 3x0.2VA (5A)					
		220V	5A	0-2kW (25)								
Reactive power	Single phase 2-wire	110V	1A	0-100var (11)	50Hz (5)	Approx. 0.35VA	Approx. 0.2VA	1-5V (A)	100/110V AC (1)	CR1-□■●▲		
		110V	5A	0-500var (15)				0-5V (B)				
		220V	1A	0-200var (21)	60Hz (6)	Approx. 0.35VA (110V)	Approx. 0.2VA (5A)	0-5V (1kΩ or more) (S)	200/220V AC (2)			
		220V	5A	0-1kvar (25)				0-5V (1kΩ or more) (C)				
		3-phase 3-wire	110V	1A	0-200var (11)	50Hz (5)	Approx. 2x0.35VA (110V)	Approx. 2x0.2VA (5A)	0-10V (2kΩ or more) (H)		24V DC±10% (3)	CR3-□■●▲
			110V	5A	0-1kvar (15)				0-10V (2kΩ or more) (J)			
	220V		1A	0-400var (21)	60Hz (6)	Approx. 2x0.35VA (110V)	Approx. 2x0.2VA (5A)	4-20mA (600Ω or less) (K)	None (9)			
	220V		5A	0-2kvar (25)				0-1mA (10kΩ or less) (J)				
	3-phase 4-wire	110V	1A	0-200var (11)	50Hz (5)	Approx. 3x0.35VA (110V)	Approx. 3x0.2VA (5A)	0-5mA (2kΩ or less) (K)	Approx. power consumption CR1: 1.8VA CR3: 1.9VA CR4: 2.0VA	CR4-□■●▲		
		110V	5A	0-1kvar (15)				0-5mA (2kΩ or less) (K)				
		220V	1A	0-400var (21)	60Hz (6)	Approx. 3x0.35VA (110V)	Approx. 3x0.2VA (5A)					
		220V	5A	0-2kvar (25)								

Note: * Replace the marks □ ■ ● ▲ in the type number by codes indicated in parenthesis.


Input-output

Input	Output
0-100W-var	0-5V
0-200W-var	0-10V
0-400W-var	0-1mA
0-500W-var	0-5mA
0-1kW-kvar	
0-2kW-kvar	




Input-output

Input	Output
0-100W-var	-5-0-+5V
0-200W-var	
0-400W-var	
0-500W-var	
0-1kW-kvar	
0-2kW-kvar	



Input-output

Input	Output
0-100W-var	1-5V
0-200W-var	4-20mA
0-400W-var	
0-500W-var	
0-1kW-kvar	
0-2kW-kvar	





MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br


• Power factor transducers/CC

- Accuracy: 3.0%
- Response time: 0.7s or less
- Insulation resistance: 100MΩ or more, 500V megger
- Dielectric strength: 2000V AC, 1 min. between input and output circuits, between input circuit and power supply
2000V AC, 1 min. between output circuit and power supply, output circuit and case (earth terminals)
- Ambient temperature and humidity: -10 to +50°C, 90% RH or less (no condensation)


Description		Input (AC)				Output (DC) (●)		Control (▲)	Type							
Power factor	Circuit	Voltage		Current (□)	Power factor (■)	Frequency	Power consumption		Load resistance	power supply						
							Voltage	Current								
	Single phase 2-wire	110V	1A	(11)	LEAD LAG 0.5 — 1 — 0.5 (5)	50/60Hz	Approx. 0.35VA (110V)	Approx. 0.25VA (5A)	1 – 5V (A)	100/110V AC 50/60Hz (1)	CC1-□■●▲					
		110V	5A	(15)					0 – 5V (B)							
		220V	1A	(21)					0 – 1 – 0 (0)			– 5 – 0 – +5V (S)	200/220V AC 50/60Hz (2)			
		220V	5A	(25)								(1kΩ or more)				
		3-phase 3-wire	110V	1A					(11)			Approx. 2×0.35VA (110V)	Approx. 2×0.25VA (5A)	0 – 10V (C)	24V DC±10% (3)	CC3-□■●▲
			110V	5A					(15)					(2kΩ or more)		
	220V		1A	(21)	4 – 20mA (H)	None (9)										
	220V	5A	(25)	0 – 1mA (J)												
	3-phase 4-wire	110V	1A	(11)	Approx. 3×0.35VA (110V)	Approx. 3×0.25VA (5A)	0 – 5mA (K)	Approx. power consumption 2.2VA	CC4-□■●▲							
		110V	5A	(15)			(10kΩ or less)									
		220V	1A	(21)			0 – 5mA (2kΩ or less)									
		220V	5A	(25)												

Note: * Replace the marks □ ■ ● ▲ in the type number by codes indicated in parenthesis.


Input-output

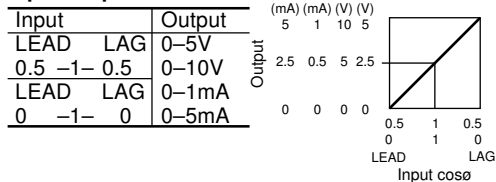

Input-output

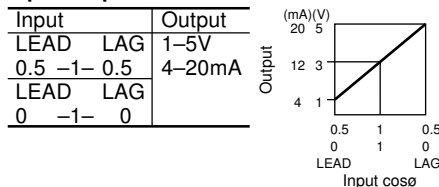

Input-output

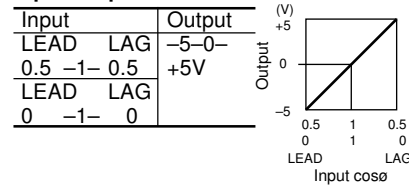


• **Phase angle transducers/CP**

Accuracy: 3.0%
 Response time: 0.7s or less
 Insulation resistance: 100MΩ or more, 500V megger
 Dielectric strength: 2000V AC, 1 min. between input and output circuits, between input circuit and power supply
 2000V AC, 1 min. between output circuit and power supply, output circuit and case (earth terminals)
 Ambient temperature and humidity: -10 to +50°C, 90% RH or less (no condensation)


Description		Input (AC)				Output (DC)	Control	Type			
Phase angle	Circuit	Voltage	Current (□)	Phase angle (■)	Frequency	Load resistance	power supply				
Single phase 2-wire	110V 1A (11)	110V	1A (11)	LEAD LAG 60° — 0 — 60° (6) 90° — 0 — 90° (9)	50/60Hz	Approx. 0.35VA (110V)	Approx. 0.25VA (5A)	1 – 5V (1kΩ or more) (A) 0 – 5V (1kΩ or more) (B) – 5 – 0 – +5V (1kΩ or more) (S) 0 – 10V (2kΩ or more) (C) 4 – 20mA (600Ω or less) (H) 0 – 1mA (10kΩ or less) (J) 0 – 5mA (2kΩ or less) (K)	100/110V AC 50/60Hz (1)	CP1-□■●▲	
	110V 5A (15)		5A (15)								200/220V AC 50/60Hz (2)
	220V 1A (21)	220V	1A (21)						Approx. 2×0.35VA (110V)	Approx. 2×0.25VA (5A)	24V DC±10% (3)
	220V 5A (25)		5A (25)								
3-phase 3-wire	110V 1A (11)	110V	1A (11)	50/60Hz	Approx. 3×0.35VA (110V)	Approx. 3×0.25VA (5A)	Approx. power consumption 2.2VA	CP3-□■●▲			
3-phase 4-wire	110V 5A (15)		5A (15)						Approx. 220V 1A (21)	Approx. 220V 5A (25)	
	220V 1A (21)	1A (21)	CP4-□■●▲								
	220V 5A (25)	5A (25)									

Note: * Replace the marks □ ■ ● ▲ in the type number by codes indicated in parenthesis.


Input-output

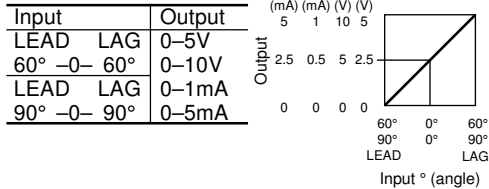

Input-output

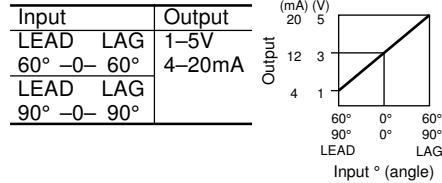


Input-output

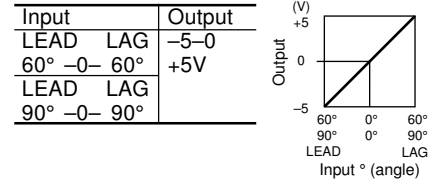



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

■ Dimensions, mm

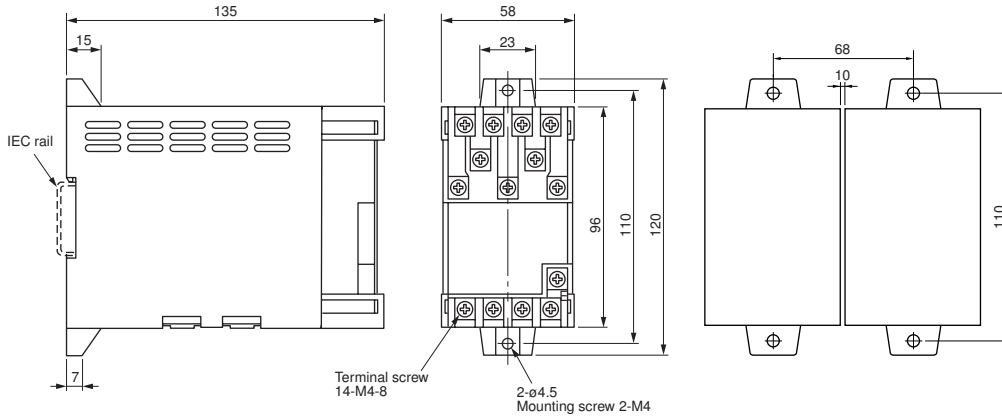


■ Mass


Type	Mass
CAC	0.3kg
CW1, CW3, CW4	0.5kg
CR1, CR3, CR4	0.5kg
CF1	0.4kg
CC1	0.5kg
CC3, CC4	0.55kg
CP1	0.5kg
CP3, CP4	0.55kg

■ Wiring diagrams


CAC (Voltage input), CF1




CAC (Current input)




CW1, CR1, CC1, CP1

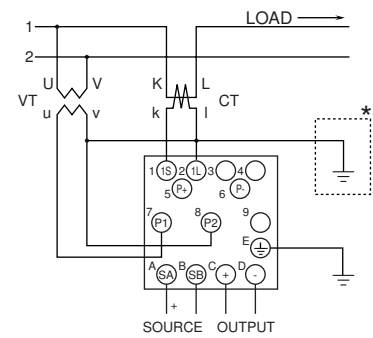


CR3, CC3, CP3 (3-phase, 3-wire)

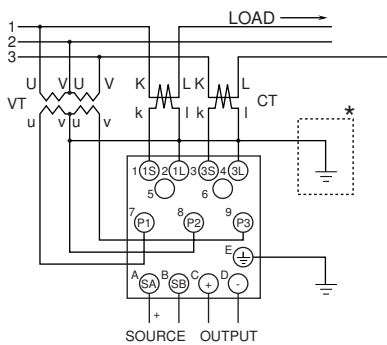

CW3 (3-phase, 3-wire)

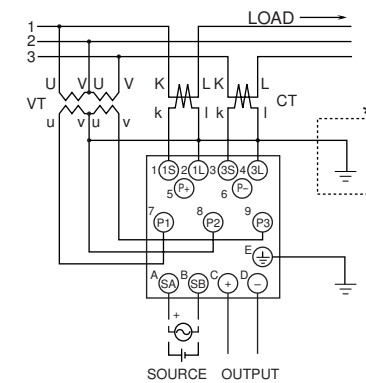


CR4, CC4, CP4, CW4 (3-phase, 4-wire)

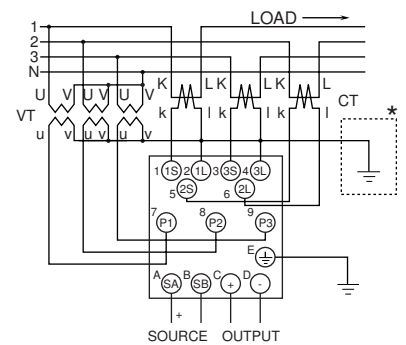


Note: * Never ground when VT and CT are not used.

■ Type number nomenclature


• AC voltage and current transducers

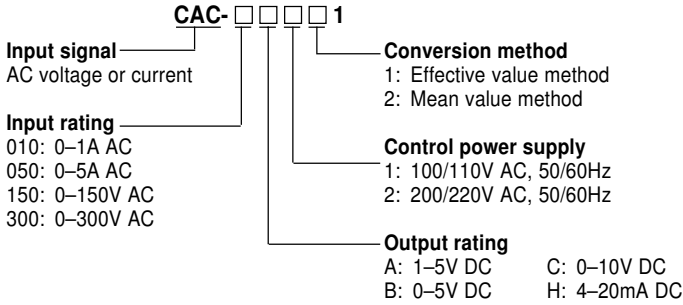


• Frequency transducers

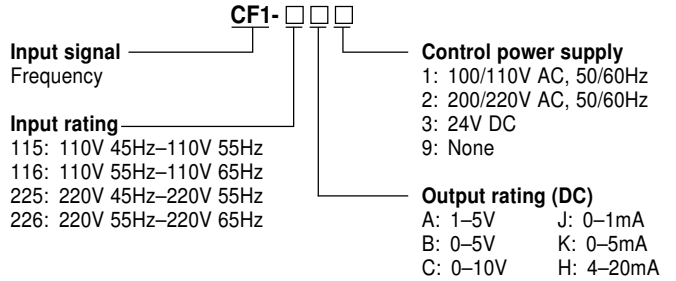

• Active and reactive power transducers

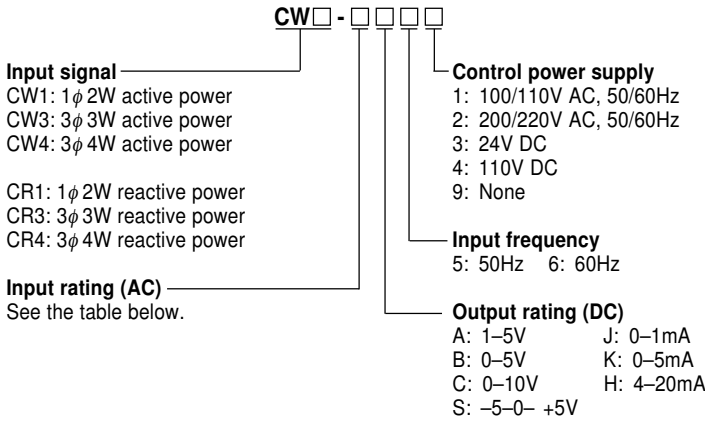

• Power factor transducers

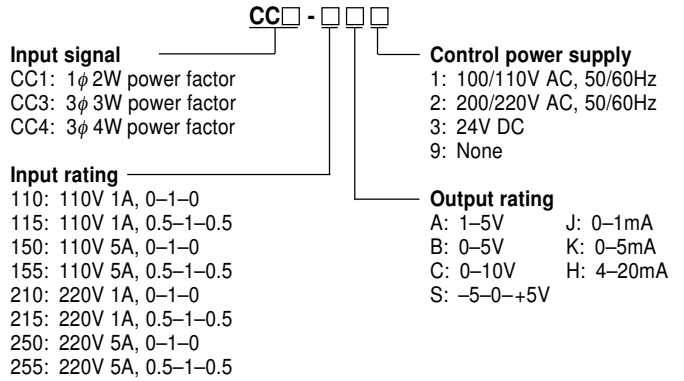

Input ratings (AC)


Code	Voltage (V)	Current (A)	Active power (W)		Reactive power (var)	
			1φ	3φ 3W 3φ 4W (CW1) (CW3, CW4)	1φ	3φ 3W 3φ 4W (CR1) (CR3, CR4)
11	110	1	100	200	100	200
15	110	5	500	1000	500	1000
21	220	1	200	400	200	400
25	220	5	1000	2000	1000	2000

■ Ordering information

Specify the following:

1. Type number
2. 3-phase or single-phase circuit

• Phase angle input transducers

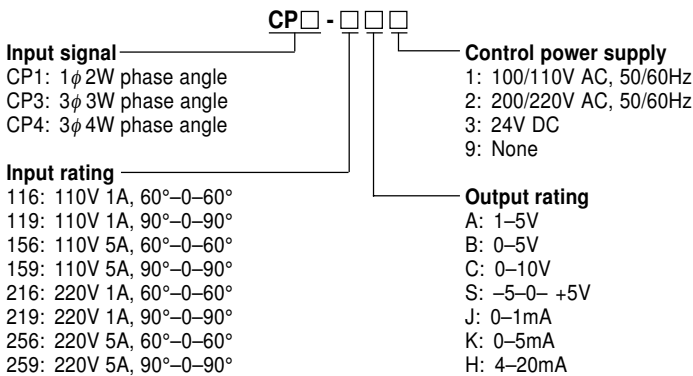

WF1MA self-powered, DC-isolated transducers

■ **Features**

- No power supply is required.
- Isolated between input and output circuits
- Snap-on mounting on IEC 35mm rail
- Safe, secured connection of screw terminal with cover

■ **Specifications**

• **Conversion performance**

- Accuracy: ±0.1% FS (full scale)
- Temperature characteristic: ±0.01%/°C FS (Typ.)
- Response: 50ms or less (0 to 90%)
- Load fluctuation: +0.1%/100Ω or less (at 250Ω or less)
- 0.1%/100Ω or less (at 250Ω or more)

• **Input specifications**

Input signal		Internal resistance	Max. allowable current
Current input	0 to 20mA DC (common with 4 to 20mA DC)	250Ω	30mA

• **Output specifications**

Output signal		Allowable load resistance
Current output	0 to 20mA DC (common with 4 to 20mA DC)	1kΩ or less

- Internal voltage drop: 3.3V or less
- Ripple in output : 0.5% or less (at 250Ω, 200mA load)

• **General specifications**

- Structure: Screw-terminal integrated structure
- Connection: M3.5 screw terminal
- Housing material: Black PC resin
- Insulation resistance: 100MΩ or more (500V DC)
- Between input, output circuits, power supply, and ground
- Dielectric strength: 1500V AC, 1min
- Between input, output circuits, power supply, and ground

• **Installation specifications**


- Power supply: Not required
- Operating temperature: -5 to +50°C
- Operating humidity: 90%RH or less (no condensation)
- Storage temperature: -10 to +70°C
- Storage humidity: 60%RH or less (no condensation)

■ **Ordering information**

- Specify the following:
- 1. Type number




■ **Type number nomenclature**

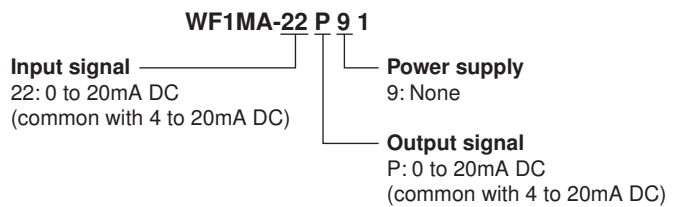


Note: The value of output signal is the same as that of the input signal (ratio: 1-1). Example: 4-20mA DC input — 4-20mA DC output

■ **Dimensions, mm**

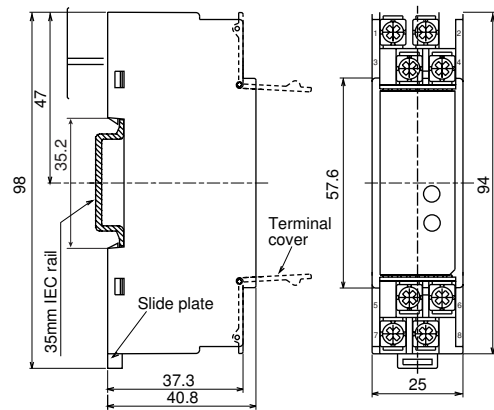

Mass: Approx. 80g

■ **Wiring diagram**

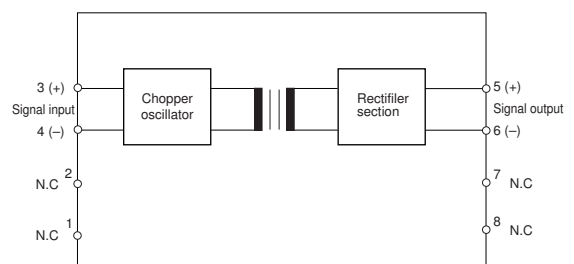

WF5HS high-speed, DC-isolated transducers

■ **Features**

- 3 ports isolated between input, output circuits, and power supply
- Snap-on mounting on IEC 35mm rail
- Saves wiring time by using push-terminal

■ **Specifications**

● **Conversion performance**

Accuracy: $\pm 0.25\%$ FS (full scale)
 Temperature characteristic: $\pm 0.02\%/^{\circ}\text{C}$ FS (Typ.)
 Response: 1 ms or less (0 to 90%)

● **Input specifications**

Input signal		Input impedance
Voltage input	0 to 5V, 1 to 5V, 0 to 10V DC -10 to 10V, 0 to 1V, 0 to 100mV DC	Input impedance: 1M Ω or more
Current input	4 to 20mA DC	Internal resistance: 250 Ω

● **Output specifications**

Output signal		Allowable load resistance
Voltage output	0 to 5V, 1 to 5V DC 0 to 10V, -10 to 10V DC	550 Ω or more
Current output	4 to 20mA DC	550 Ω or less

Output adjustment – adjustable from front
 Zero adjustment: -5 to +5%
 Span adjustment: 95 to 105%

● **General specifications**

Structure: Push-terminal integrated structure
 Connection: Push-terminal
 Solid wire of 1.4mm dia., stranded wire of 1.5mm² or less
 Housing material: Black polycarbonate resin
 Insulation resistance:
 100M Ω or more (500V DC)
 Between input, output circuits, power supply, and ground
 Dielectric strength:
 1500V AC, 1min
 Between input, output circuits, power supply, and ground

● **Installation specifications**


Power supply: 24V DC $\pm 0\%$, 80mA or less
 Operating temperature: -5 to +50 $^{\circ}\text{C}$
 Operating humidity: 90%RH or less (no condensation)
 Storage temperature: -10 to +70 $^{\circ}\text{C}$
 Storage humidity: 60%RH or less (no condensation)

■ **Ordering information**


Specify the following:
 1. Type number



■ **Type number nomenclature**

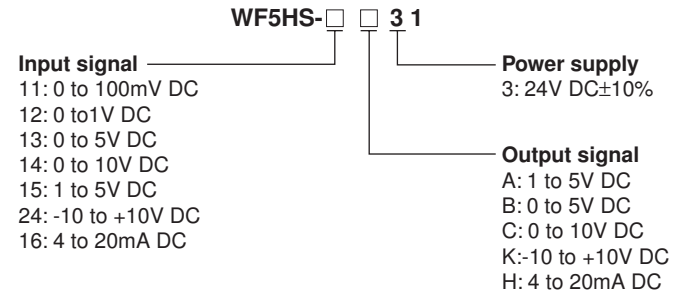


■ **Dimensions, mm**

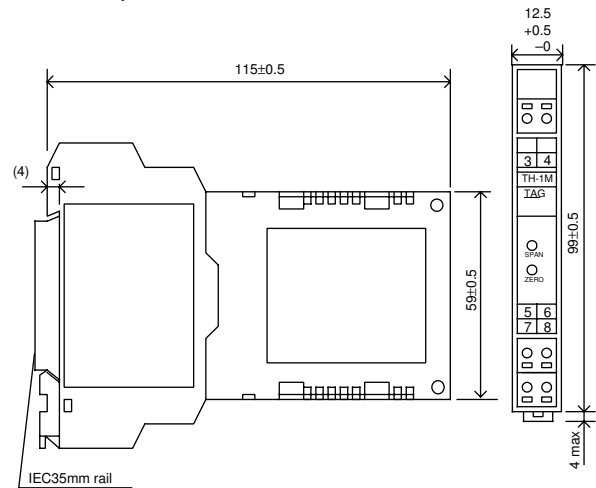

Mass: Approx. 80g

■ **Wiring diagram**

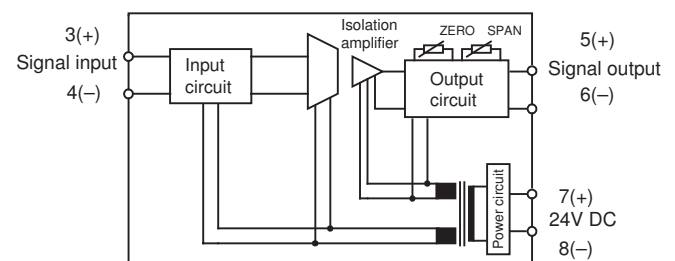

WF5PM potentiometer transducers

■ Features

- WF5PM can be used irrespective of potentiometer's resistance, if the value is within the range between 100Ω and 10kΩ.
- 3 ports isolated between input, output circuits, and power supply
- Snap-on mounting on IEC 35mm rail
- Saves wiring time by using push-terminal

■ Specifications

● Conversion performance

Accuracy: $\pm 0.25\%$ FS (full scale)
 Temperature characteristic: $\pm 0.02\%/^{\circ}\text{C}$ FS (Typ.)
 Response: 50ms or less (0 to 90%)

● Input specifications

	Input signal	Input resistance
Potentiometer	100Ω to 10kΩ	0.5V

Note: No adjustment is required if it is used at all resistance values (0 to 100%) of potentiometers.

● Output specifications

	Output signal	Allowable load resistance
Voltage output	1 to 5V, 0 to 5V DC	2kΩ or more
	0 to 10V, -10 to +10V DC	4kΩ or more
Current output	4 to 20mA DC	550Ω or less

Output adjustment – adjustable from front

Zero adjustment: 0 to +5%

Span adjustment: 50 to 100%

● General specifications

Structure: Push-terminal integrated structure

Connection: Push-terminal

Solid wire of 1.4mm dia., stranded wire of 1.5mm² or less

Housing material: Black polycarbonate resin

Insulation resistance:

100MΩ or more (500V DC)

Between input, output circuits, power supply, and ground

Dielectric strength:

1500V AC, 1min

Between input, output circuits, power supply, and ground

● Installation specifications

Power supply: 24V DC $\pm 0\%$, 80mA or less

Operating temperature: -5 to +50°C

Operating humidity: 90%RH or less (no condensation)

Storage temperature: -10 to +70°C

Storage humidity: 60%RH or less (no condensation)


■ Ordering information

Specify the following:


1. Type number



■ Type number nomenclature

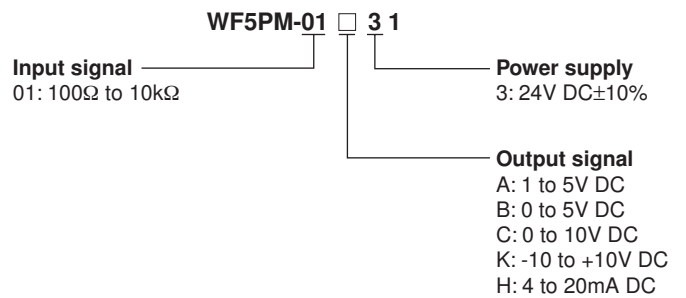


■ Dimensions, mm

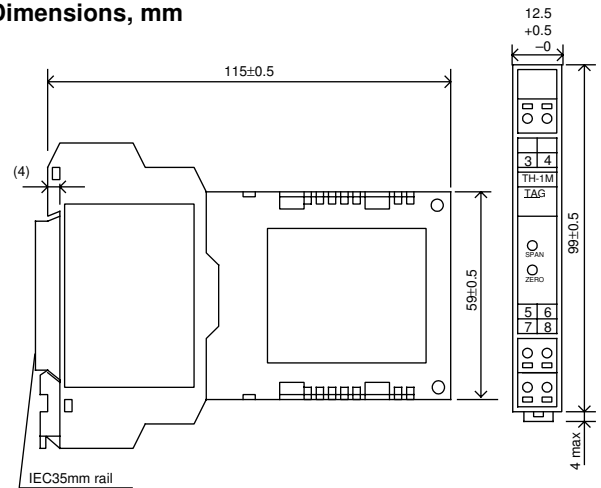

Mass: Approx. 80g

■ Wiring diagram

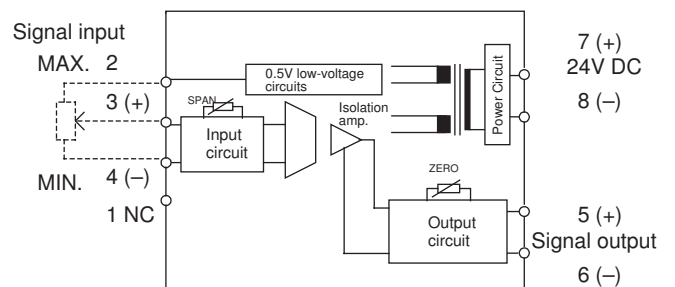

WF5MA self-powered, DC-isolated transducers

■ **Features**

- Analog process signal conversion to current output in 1:1 ratio
- No power supply is required.
- Snap-on mounting on IEC35mm rail
- Saves wiring time by using push-terminal

■ **Specifications**

● **Conversion performance**

Accuracy: $\pm 0.1\%$ FS (at res. load of 250Ω)
 Temperature characteristic:
 $\pm 0.01\%$ FS/ $^{\circ}\text{C}$ FS (at res. load of $250\Omega \pm 200\Omega$)
 $\pm 0.04\%$ FS/ $^{\circ}\text{C}$ FS (at res. load of other than the aboves)
 Load fluctuation:
 $+0.1\%$ FS / 100Ω or less (at res. load of $\leq 250\Omega$ max.)
 -0.1% FS / 100Ω or less (at res. load of $\geq 250\Omega$ min.)
 $+0.3\%$ FS / 100Ω or less (at res. load of $\leq 50\Omega$ max.)
 Response: 20ms or less (0 to 90%)
 Internal voltage drop: 3V or less

● **Input specifications**

	Input signal	Internal resistance	Max. allowable input current
Current input	0 to 20mA DC, 4 to 20mA DC (common use)	250Ω	30mA at 30V DC

● **Output specifications**

	Output signal	Allowable load resistance
Current output	0 to 20mA DC, 4 to 20mA DC (common use)	$1k\Omega$ or less

● **General specifications**


Structure: Push-terminal integrated structure
 Connection: Push-terminal
 Solid wire of 1.4mm dia., stranded wire of 1.5mm^2 or less
 Housing material: Black polycarbonate resin
 Insulation resistance: $100M\Omega$ or more (500V DC)
 Between input, output circuits, power supply, and ground
 Dielectric strength: 2000V AC, 1min
 Between input, output circuits, power supply, and ground

● **Installation specifications**


Power supply: Not required
 Operating temperature: -5 to $+50^{\circ}\text{C}$
 Operating humidity: 90%RH or less (no condensation)
 Storage temperature: -10 to $+70^{\circ}\text{C}$
 Storage humidity: 60%RH or less (no condensation)

■ **Ordering information**


Specify the following:
 1. Type number

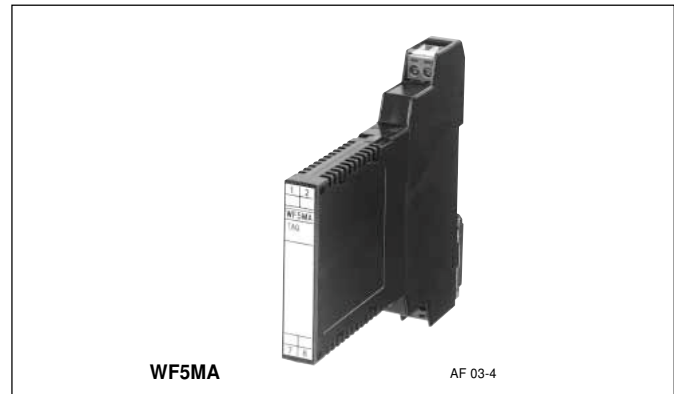

■ **Type number nomenclature**

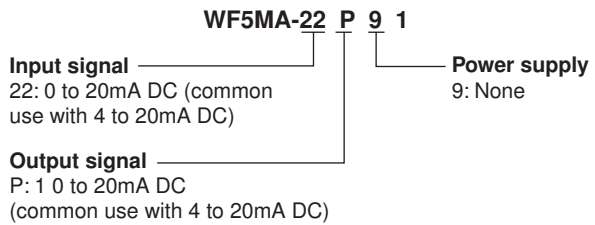


■ **Dimensions, mm**

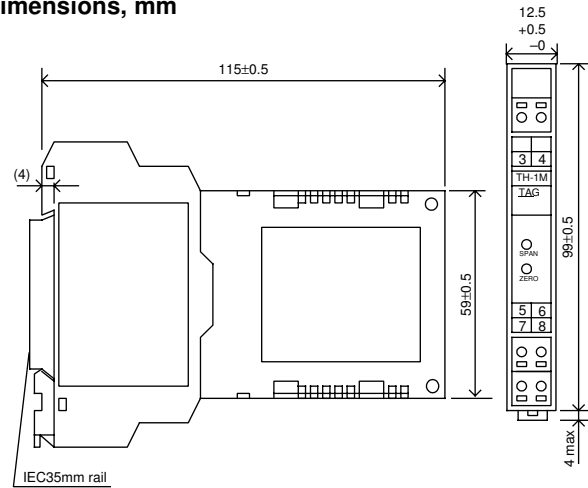

Mass: Approx. 80g

■ **Wiring diagram**

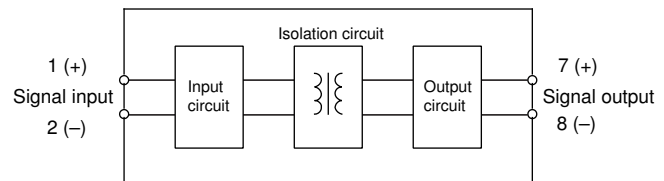



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

WH7DC isolated DC transducers

■ Description

The WH7DC isolated DC transducer is designed to convert a DC voltage or current values into a DC signal. Input and output circuits are electrically isolated from each other. These transducers are ideal for the amplifying and isolating minute signals that are output from a variety of sensors.

■ Features

- Power supply of 24V DC. I/O circuits isolated from the power supply.

■ Applications

- Signal exchange between electrically isolated systems
- Prevention of control signal sneak currents
- Remote transmission of output signals

■ Standards


UL recognized and CSA File No. E206961

■ Specifications

Type	WH7DC	
Insulation method	Photocoupler	
Accuracy	±0.1% (Pulse output: ±0.2%)	
Temperature characteristics	±0.015% /°C	
Response time	0.5s max. (0 to 90%)	
Insulation resistance	100MΩ or more (500V DC megger)	
Dielectric strength	2000V AC, 1 min. between input-output-power supply and ground 1000V AC, 1 min. between output 1 and output 2	
Auxiliary power supply	24V DC ±10%	
Power consumption	Approx. 120mA at 24V DC	
Ambient temperature and humidity	-5 to 55°C, 90% RH or less (no condensation)	
Input signal (Input impedance)	Voltage	0 to 1V DC (1MΩ min.), 0 to 5V DC (1MΩ min.), 0 to 10V DC (1MΩ min.), 1 to 5V DC (1MΩ min.)
	Current	0 to 20mA DC (250Ω), 4 to 20mA DC (250Ω)
Output 1 (Load resistance)	Voltage	0 to 5V DC (1kΩ min.), 0 to 10V DC (2kΩ min.), 1 to 5V DC (1kΩ min.)
	Current	0 to 20mA DC (750Ω max.), 4 to 20mA DC (750Ω max.)
Output 2 (Load resistance)	Voltage	1 to 5V DC (1kΩ min.)
	Current	4 to 20mA DC (350Ω max.)
	Pulse output	Open collector signal: 0 to 0.01Hz min. and 1kHz max. with 100mA max. at 30V Shutdown frequency: 2% of full scale
Zero adjustment range: Approx. -5% to +5%	• Only output 1 is adjustable with the WH7AJ adjuster.	
Span adjustment range: Approx. 95% to 105%		



■ Type number nomenclature

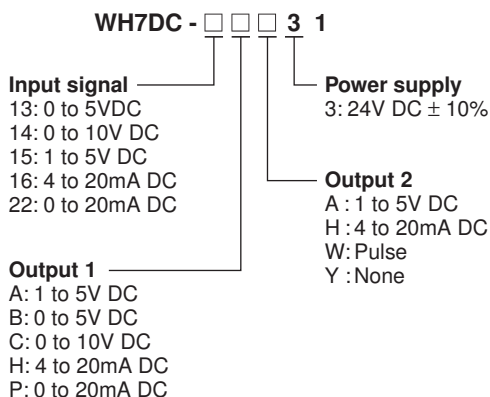

■ Ordering information

Specify the following:
1. Type number

■ Dimensions and wiring diagrams

See page 09/53.

WH7TC thermocouple temperature transducers

■ Description

The WH7TC transducer converts a thermocouple input into a DC voltage or current signal output with reference point compensation of thermal-electromotive force. Input and output circuits are electrically isolated from each other.

■ Features

- Power supply of 24V DC. I/O circuits isolated from the power supply.
- Reference point compensation function, linearizer function, and upper limit burnout function

■ Applications


- Temperature input control of electric, gas, or heavy oil furnaces

■ Standards

UL recognized and CSA File No. E206961

■ Specifications

Type (Ordering code)	WH7TC	
Insulation method	Photocoupler	
Accuracy	±0.3% (±0.5% for low-range)	
Temperature characteristics	±0.02%/°C (±0.04% /°C for low-range)	
Response time	1s max. (0% to 90%)	
Reference point compensation accuracy	±1°C max.	
Burnout time	10s max.	
Permissible external resistance	10Ω max.	
Input thermocouple (Input impedance)	J, K, E, T, B, R, S, N (1MΩ min.)	
Output 1 (Load resistance)	Voltage	0 to 5V DC (1kΩ min.), 0 to 10V DC (2kΩ min.), 1 to 5V DC (1kΩ min.)
	Current	0 to 20mA DC (750Ω max.), 4 to 20mA DC (750Ω max.)
Output 2 (Load resistance)	Voltage	1 to 5V DC (1kΩ min.)
	Current	4 to 20mA DC (350Ω max.)
Zero adjustment range: Approx. -5% to +5%	Only output 1 is adjustable with the WH7AJ adjuster.	
Insulation resistance	100MΩ or more (500V DC megger)	
Dielectric strength	2000V AC, 1 min. between input-output-power supply and ground	
	1000V AC, 1 min. between output 1 and output 2	
Auxiliary power supply	24V DC ±10%	
Power consumption	Approx. 120mA at 24V DC	
Ambient temperature and humidity	-5 to 55°C, 90% RH or less (no condensation)	

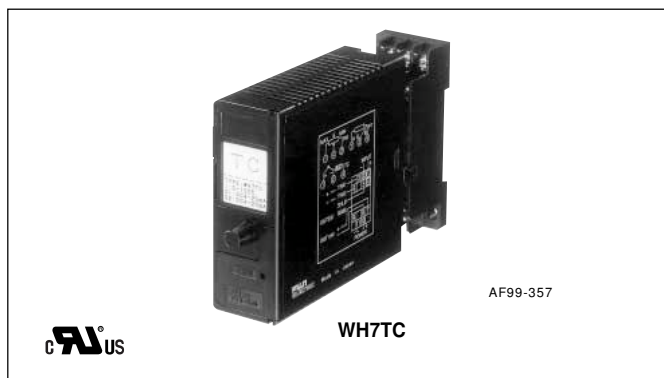


■ Input thermocouple range

Thermocouple code	Available temperature	Min. measurable temperature range	Thermocouple code	Available temperature	Min. measurable temperature range	Thermocouple code	Available temperature	Min. measurable temperature range
J	-100 to 1000°C	100°C	T	-150 to 400°C	100°C	S	0 to 1760°C	500°C
K	-100 to 1200°C	100°C	B	0 to 1820°C	900°C	N	-100 to 1200°C	150°C
E	0 to 700°C	100°C	R	0 to 1760°C	500°C			



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

■ Type number nomenclature

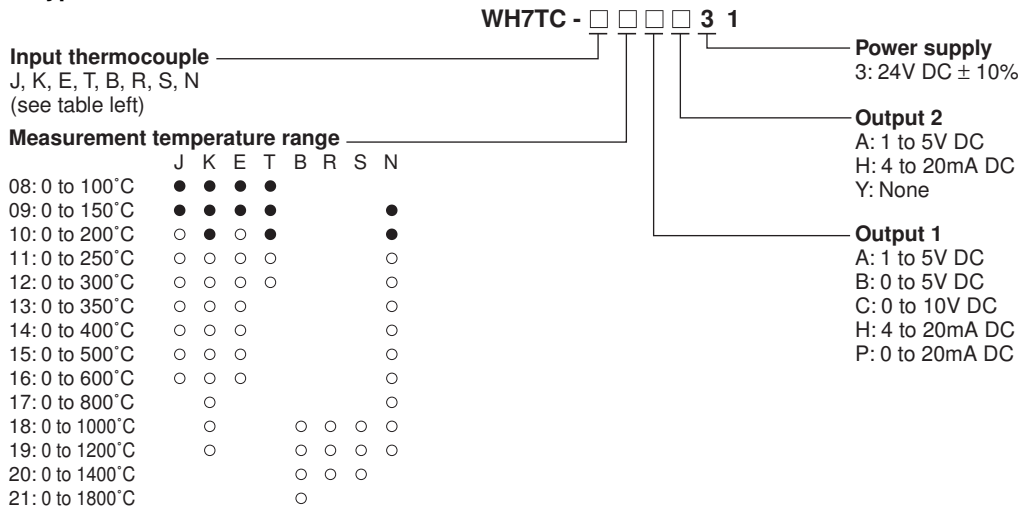

- Note:
- Black circles ● indicate low-range types.
 - White circles ○ indicate standard-range types that can be manufactured (the guaranteed accuracy ranges of thermocouples R and B are over 400°C and 800°C respectively).
 - Compensation wires are used to compensate the difference in temperature between thermocouples and transducer terminals. Types of compensation wires are classified by color. Select the right one according to the thermocouple at site.
 - Each transducer is shipped in combination with an RJC temperature resistance thermometer block. Use them in pairs.
 - A transducer with a lower limit burnout function is available on request.
 - When the lower limit burnout function is triggered, the output of the transducer will scale out for a moment, then it will be set to the minimum value.

■ Ordering information

Specify the following:

1. Type number

■ Dimensions and wiring diagrams

See page 09/53.

WH7PT resistance transducers

■ Descriptions

The WH7PT transducer converts resistance changes in a temperature resistance thermometer into a DC voltage or current signal. Input and output circuits are electrically isolated.

■ Features

- Power supply of 24V DC. I/O circuits isolated from the power supply.
- Linearizer function and upper limit burnout function

■ Applications


- Temperature input control from electric, gas, or heavy oil furnaces.
- Temperature input control of cold-storage warehouse.

■ Standards

UL recognized and CSA File No. E206961

■ Specifications


Type (Ordering code)	WH7PT	
Insulation method	Photocoupler	
Accuracy	±0.2% (±0.4% for low-range, span 100°C max.)	
Temperature characteristics	±0.02% /°C (±0.04% low-range)	
Response time	1s max. (0% to 90%)	
Burnout time	10s max.	
Permissible external resistance	20Ω max. per wire (Use three wires with the same resistance.)	
Input resistance thermometer	Pt100Ω	
Output 1 (Load resistance)	Voltage	0 to 5V DC (1kΩ min.), 0 to 10V DC (2kΩ min.), 1 to 5V DC (1kΩ min.)
	Current	0 to 20mA DC (750Ω max.), 4 to 20mA DC (750Ω max.)
Output 2 (Load resistance)	Voltage	1 to 5V DC (1kΩ min.)
	Current	4 to 20mA DC (350Ω max.)
Zero adjustment range: Approx. -5% to +5%	Only output 1 is adjustable with the WH7AJ adjuster.	
Insulation resistance	100MΩ or more (500V DC megger)	
Dielectric strength	2000V AC, 1 min. between input-output-power supply and ground	
	1000V AC, 1 min. between output 1 and output 2	
Auxiliary power supply	24V DC ±10%	
Power consumption	Approx. 120mA at 24V DC	
Ambient temperature and humidity	-5 to 55°C, 90% RH or less (no condensation)	

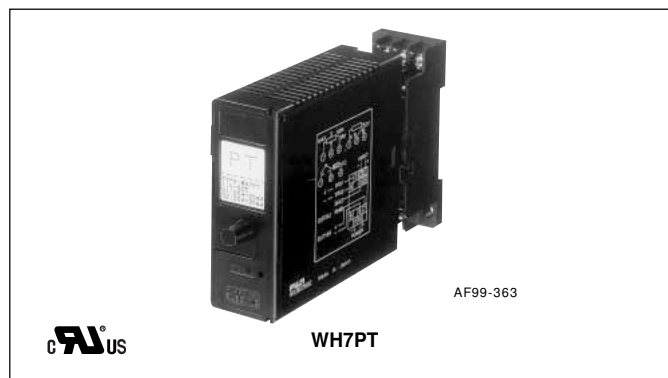



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

■ **Type number nomenclature**

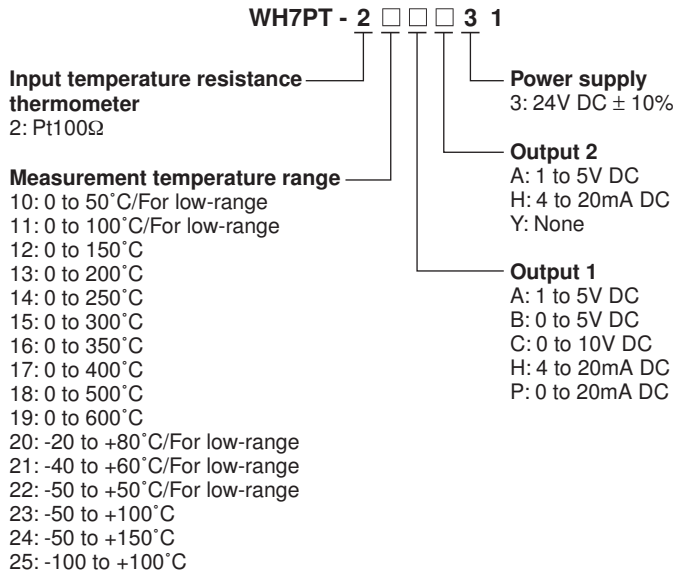

Note: When the lower limit burnout function is triggered, the output of the transducer will scale out for a moment, then it will be set to the minimum value.

■ **Ordering information**

Specify the following:

1. Type number

■ **Dimensions and wiring diagrams**

See page 09/53.

WH7PM potentiometer transducers

■ Description

The WH7PM transducer converts resistance changes in potentiometers into a DC voltage or current signal.

■ Features

- Power supply of 24V DC
- I/O circuits isolated from the power supply

■ Applications

- Float water gages
- Solenoid valve, gate, and damper valve opening meters
- Plunger pump and jack stroke detectors

■ Standards


UL recognized and CSA File No. E206961

■ Specifications

Type	WH7PM	
Insulation method	Photocoupler	
Accuracy	±0.1%	
Temperature characteristics	±0.015% / °C	
Response time	0.5s max. (0% to 90%)	
Input signal	Entire resistance range of potentiometer 100Ω to 10kΩ	
Input span	50% min. of entire resistance range of potentiometer	
Output 1 (Load resistance)	Voltage	0 to 5V DC (1kΩ min.), 0 to 10V DC (2kΩ min.), 1 to 5V DC (1kΩ min.)
	Current	0 to 20mA DC (750Ω max.), 4 to 20mA DC (750Ω max.)
Output 2 (Load resistance)	Voltage	1 to 5V DC (1kΩ min.)
	Current	4 to 20mA DC (350Ω max.)
Zero adjustment range: Approx. -5% to +5%	Only output 1 is adjustable with the WH7AJ adjuster.	
Insulation resistance	100MΩ or more (500V DC megger)	
Dielectric strength	2000V AC, 1 min. between input-output-power supply and ground 1000V AC, 1 min. between output 1 and output 2	
Auxiliary power supply	24V DC ±10%	
Power consumption	Approx. 120mA at 24V DC	
Ambient temperature and humidity	-5 to 55°C, 90% RH or less (no condensation)	



■ Type number nomenclature

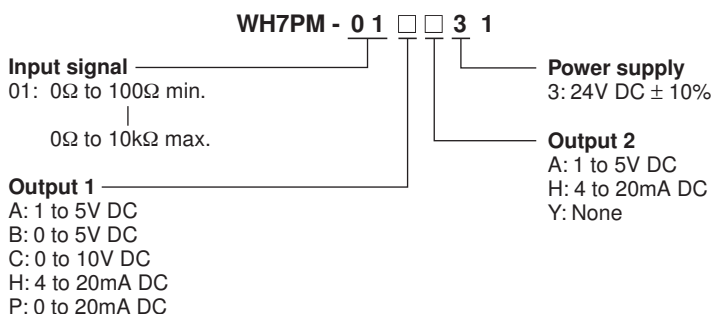

■ Ordering information

Specify the following:

1. Type number
2. Input signal range (Potentiometer resistance range)

■ Dimensions and wiring diagrams

See page 09/53.

WH7RV reverse transducers

■ Description

The WH7RV reverse transducer inversely converts an input signal into an output signal. Input and output circuits are electrically isolated from power supply.

■ Features

- Power supply of 24V DC.
I/O circuits isolated from the power supply.

■ Applications

- Reversing control operation from input
- Fail-safe circuits and output subtraction circuits

■ Standards


UL recognized and CSA File No. E206961

■ Specifications

Type	WH7RV	
Insulation method	Photocoupler	
Accuracy	±0.1%	
Temperature characteristics	±0.015%/°C	
Response time	0.5s max. (0% to 90%)	
Input signal (Input impedance)	Voltage	0 to 5V DC (1MΩ min.), 0 to 10V DC (1MΩ min.), 1 to 5V DC (1MΩ min.)
	Current	0 to 20mA DC (250Ω), 4 to 20mA DC (250Ω)
Output 1 (Load resistance)	Voltage	5 to 0V DC (1kΩ min.), 10 to 0V DC (2kΩ min.), 5 to 1V DC (1kΩ min.)
	Current	20 to 0mA DC (750Ω max.), 20 to 4mA DC (750Ω max.)
Output 2 (Load resistance)	Voltage	5 to 1V DC (1kΩ min.)
	Current	20 to 4mA DC (350Ω max.)
Zero adjustment range: Approx. -5% to +5%	Only output 1 is adjustable with the WH7AJ adjuster.	
Insulation resistance	100MΩ or more (500V DC megger)	
Dielectric strength	2000V AC, 1 min. between input-output-power supply and ground 1000V AC, 1 min. between output 1 and output 2	
Auxiliary power supply	24V DC ±10%	
Power consumption	Approx. 120mA at 24V DC	
Ambient temperature and humidity	-5 to 55°C, 90% RH or less (no condensation)	



■ Type number nomenclature

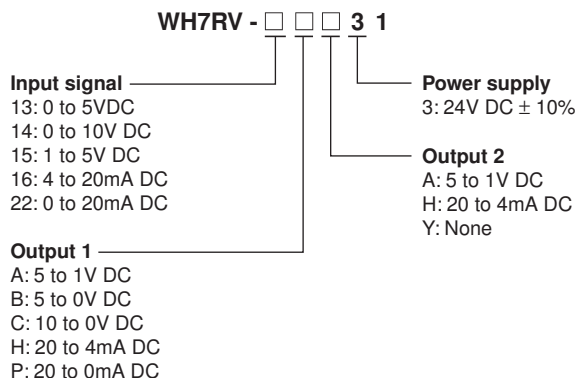

■ Ordering information

Specify the following:

1. Type number

■ Dimensions and wiring diagrams

See page 09/53.

WH7SP slow pulse transducers

■ Description

The WH7SP slow pulse transducers are designed to convert ON-OFF pulse and voltage pulse signals into a DC voltage or current signal, isolating input and output circuits.

■ Features

- Power supply of 24V DC, with dielectric strength 2000V AC for 1min and 4 ports isolated. (1000V AC for 1 min between output 1 and output 2)

■ Applications

- Flow rate control combined with various types of flow meters
- Monitoring automated machines and wind force combined with rotary encoder
- Speed control of rotating machines combined with pulse transmitter and controller




■ Standards

- UL recognized and CSA File No. E206961 (24V DC power supply models only)


■ Specifications

Type		WH7SP
Insulation method		Photocoupler
Accuracy		±0.1%
Temperature characteristics		±0.015%/°C
Response time		0.5s + twice of input cycle (0% to 90%)
Shut down frequency		Approx. 5% of input frequency
Input signal	ON/OFF pulse	Relay Open collector (NPN) 0.01 to 50Hz (pulse width: 10ms or more)
	DC voltage pulse	0.01 to 10kHz (12V at OFF, approx. 3mA at ON) 0.01 to 10kHz (Duty ratio 20-80% with pulse width 50µs or more, 2V ^{P-P} to 50V ^{P-P}) AC voltage 50 to 10kHz (2V ^{P-P} to 50V ^{P-P})
Output 1 (Load resistance)	Voltage	0 to 5V DC (1kΩ min.), 0 to 10V DC (2kΩ min.), 1 to 5V DC (1kΩ min.)
	Current	0 to 20mA DC (750MΩ max.) 4 to 20mA DC (750MΩ max.)
Output 2 (Load resistance)	Voltage	1 to 5V DC (1kΩ min.)
	Current	4 to 20mA DC (350MΩ max.)
Zero adjustment range: Approx. -5% to +5%		Only the output 1 is adjustable with the WH7AJ adjuster.
Insulation resistance		100MΩ or more (500V DC megger)
Dielectric strength		2000V AC, 1 min. between input-output-power supply and ground 1000V AC, 1 min. between output 1 and output 2
Auxiliary power supply		24V DC ±10%
Power consumption		Approx. 120mA at 24V DC
Ambient temperature and humidity		-5 to 55°C, 90% RH or less (no condensation)

■ Type number nomenclature

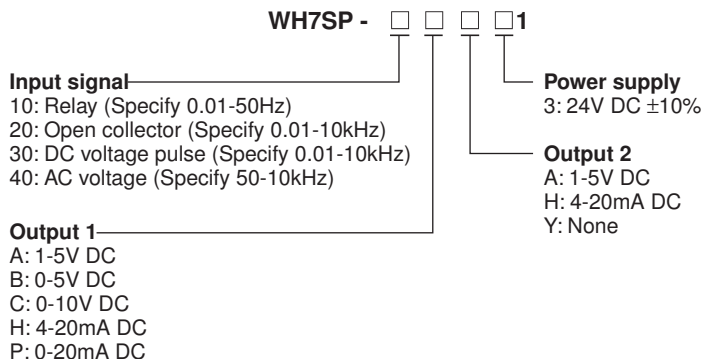

• Shut down frequency
 When the input frequency becomes too low against the full scale, the output ripple cannot be removed. Hence, when the input frequency becomes 5% lower than the full scale, the output is forcibly zero.




■ Ordering information


- Specify the following:
1. Type number
 2. Input frequency

■ Input circuit diagram



- ON-OFF pulse input circuit

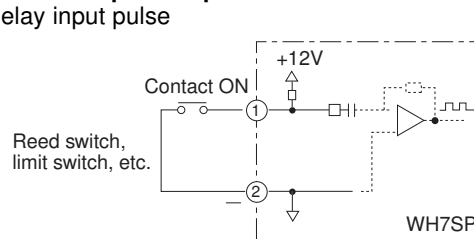

Open collector pulse

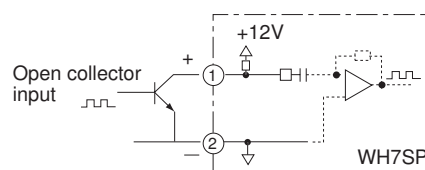

● Voltage pulse input circuit

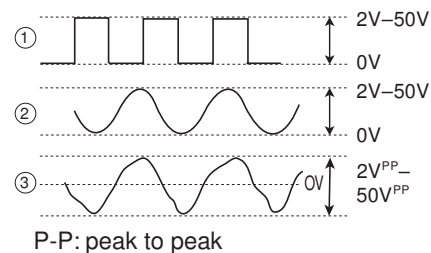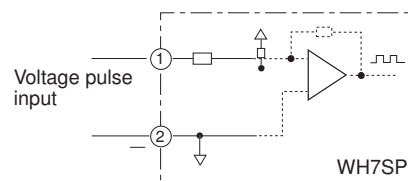

■ Dimensions and wiring diagrams

See page 09/53.

WH7DY isolation type transducers

■ Description

The WH7DY transducers (isolation type distributor) are designed to use by combining 2-wire type transmitter. The WH7DY supplies DC power to the transmitters on site through signal line and converts 4 to 20mA DC signal generated by the transmitters into input signals suitable for monitoring and control equipment, isolating input and output circuits from each other. Pulse output signal can be output as the output 2.

■ Features

- Power supply of 24V DC, with dielectric strength 2000V AC for 1min and 4-port isolated. (1000V AC 1 min, between output 1 and output 2)
- Short-circuit protection



■ Standards

- UL recognized and CSA File No. E206961 (24V DC power supply models only)

■ Specifications

Type	WH7DY	
Power supply fro transmitter	Voltage	24 to 28V DC at no load
	Current	Max. 22mA DC (short-circuit current: approx. 30mA)
	Ripple	0.1V ^{P-P} or less
	Allowable short-circuit time	No limitation
	Tolerance against load fluctuation	2% or less at 0 to 100% load
Insulation method	Photocoupler	
Accuracy	±0.1%	
Temperature characteristic	±0.02%/°C	
Response time	0.5s or less (0% to 90%)	
Input signal (input impedance)	4 to 20mA DC (250Ω)	
Input signal (with square root operation)	$Y = \sqrt{\frac{X = (\text{Input } 0\% \text{ value})}{\text{Input span}}} \times \text{Output span} + (\text{Output } 0\% \text{ value})$ <p>Where: X = Input value, Y = Output value E.g. If input = 4-20mA, output range = 4-20mA;</p> $\text{Output } Y = \sqrt{\frac{20 - 4}{16}} \times 16 + 4 = 20\text{mA}$	
Output 1 (Load resistance)	Voltage	0 to 5V DC (1kΩ min.), 0 to 10V DC (2kΩ min.), 1 to 5V DC (1kΩ min.)
	Current	0 to 20mA DC (500MΩ max.), 4 to 20mA DC (500MΩ max.)
Output 2 (Load resistance)	Voltage	1 to 5V DC (1kΩ min.)
	Current	4 to 20mA DC (350MΩ max.)
Zero adjustment range: Approx. -5% to +5%	Only the output 1 is adjustable with the WH7AJ adjuster.	
Insulation resistance	100MΩ or more (500V DC megger)	
Dielectric strength	2000V AC, 1 min. between input-output-power supply and ground 1000V AC, 1 min. between output 1 and output 2	
Auxiliary power supply	24V DC ±10%	
Power consumption	Approx. 120mA at 24V DC	
Ambient temperature and humidity	-5 to 55°C, 90% RH or less (no condensation)	

Note: *1 The addressing of RS-485 can be set by the WH7PD PC loader.

- When ordering, specify the output frequency. The frequency can also be changed by the WH7PD PC loader.



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

■ Type number nomenclature

WH7DY - □ □ □ 1

Power supply for transmitter

- 01: 24-28V DC
- 02: 24-28V DC with square root operation

Output 1

- A: 1-5V DC
- B: 0-5V DC
- C: 0-10V DC
- H: 4-20mA DC
- P: 0-20mA DC

Power supply


- 3: 24V DC ±10%
- Output 2
- A: 1-5V DC
- H: 4-20mA DC
- W: Pulse
- Y: None

■ Ordering information

Specify the following:
1. Type number


■ Dimensions, mm

WH7DC, WH7PT, WH7PM, WH7RV, WH7SP, WH7DY

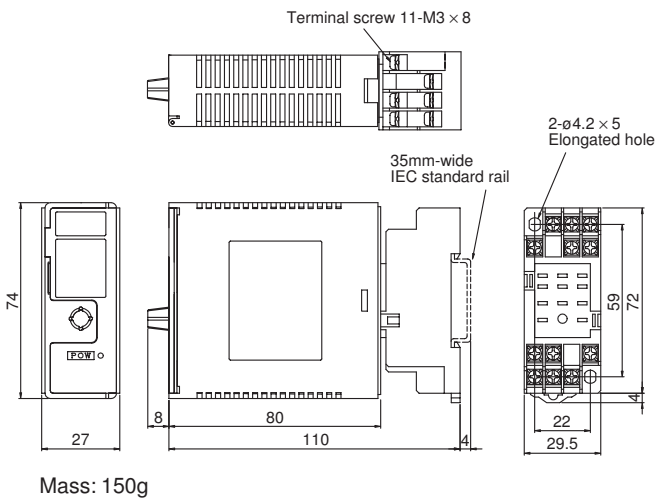


■ Wiring diagrams


WH7DC, WH7RV, WH7DY




WH7PT




WH7PM



WH7SP

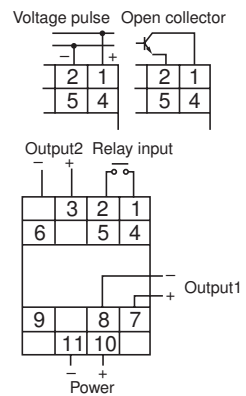


■ Dimensions, mm
WH7TC

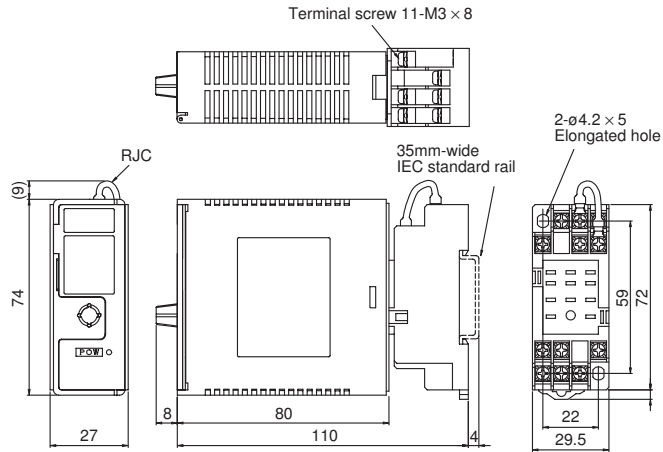


Mass: 150g

■ Wiring diagrams
WH7TC



Panel drilling

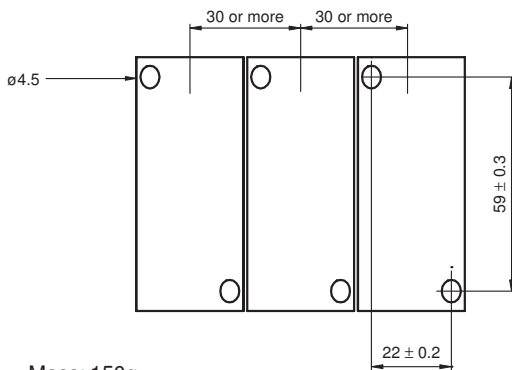

Mass: 150g

Optional accessories

Simplified adjuster WH7AJ, cable WH7CB

■ Description

- The adjuster WH7AJ is connected to a WH7 series transducer to do zero point adjustment or span adjustment.
- Use a dedicated cable WH7CB (separately sold) to connect the adjuster WH7AJ to a WH7 series transducer.


■ Ordering information

Specify the following:


1. Type number

■ Dimensions, mm

● Simplified adjuster WH7AJ

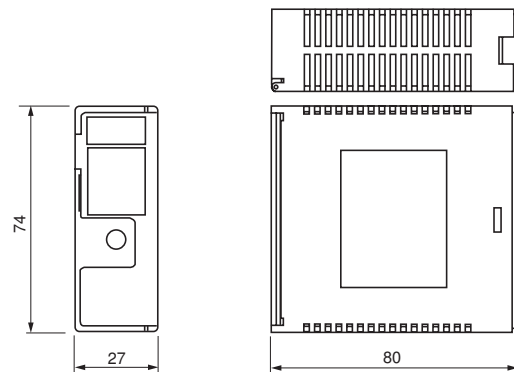

● Cable WH7CB





MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

WT2AC AC voltage and current transducers

■ Features

FUJI WT2AC AC voltage and current transducers convert AC voltage/current into DC voltage/current, and also isolate input/output circuits and power supplies.

- Select from an 85 to 264V AC, 24V DC, or 110V DC auxiliary power supply
- Three isolated ports: input, output, and power supply
- Thin profile and excellent cost performance
- Use either IEC 35mm rail mounting or screw mounting
- Screw terminals with cover ensure safe, sure connection.

■ Performance

Accuracy: ±0.4% FS
 Temperature characteristic: ±0.2%/10°C FS(Typical)
 Response time: 0.5s max. (0 to 90%)
 Insulation resistance: 100MΩ (500V DC megger)
 Withstand voltage: 2000V AC 1min

■ Input specifications

	Input signal	Input frequency
Voltage input	0 to 110V AC	50Hz, 60Hz
	0 to 150V AC	
	0 to 300V AC	
Current input	0 to 1A AC	
	0 to 5A AC	


■ Output specifications

	Output signal	Permissible external resistance
Voltage output	0 to 10mV	10kΩ or more
	0 to 100mV	100kΩ or more
	0 to 1V	200Ω or more
	0 to 5V DC, 1 to 5V DC	1kΩ or more
	0 to 10V DC	2kΩ or more
Current output	0 to 1mA DC	5kΩ or less
	0 to 5mA DC	3kΩ or less
	0 to 10mA DC	1.5kΩ or less
	0 to 16mA DC	900Ω or less
	0 to 20mA DC	750Ω or less
	1 to 5mA DC	3kΩ or less
	2 to 10mA DC	1.5kΩ or less
	4 to 20mA DC	750Ω or less

Output adjustment: Zero adjustment -5 to +5%
 Span adjustment 95 to 105%

■ Ordering information



Specify the following:
 1. Type number

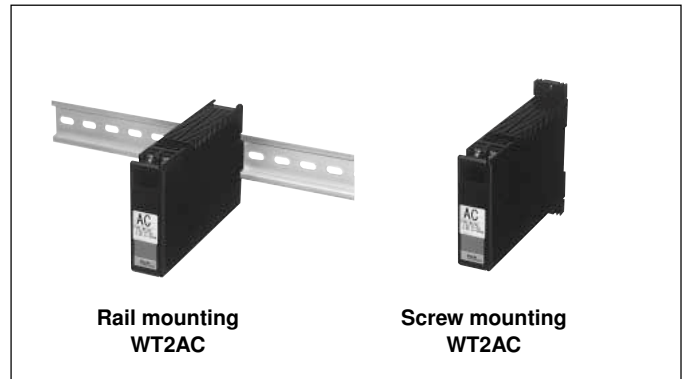

■ Specifications


Type	WT2AC
Terminal connection	M3.5 screw
Housing material	Enclosure: Polycarbonate resin UL94V-0 Terminal: ABS UL94V-0
Insulation resistance	100MΩ (500V DC megger)
Dielectric strength	2000V AC 1min
Auxiliary power supply	85 to 264V±10% (50/60Hz), approx. 3VA 24V DC±10%, approx. 100mA 110V DC±10%, approx. 30mA
Operating temperature	-5 to +50°C
Operating humidity	90%RH or less (no condensation)
Storage temperature	-20 to +60°C
Storage humidity	90%RH or less (no condensation)

■ Input-output

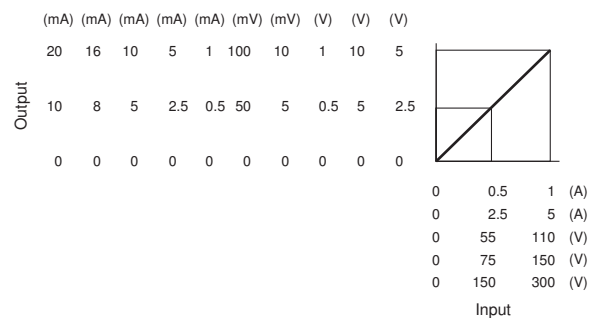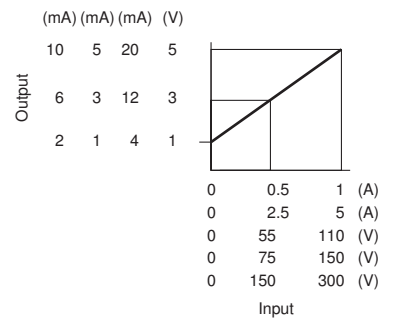

■ Dimensions, mm


• Rail mounting

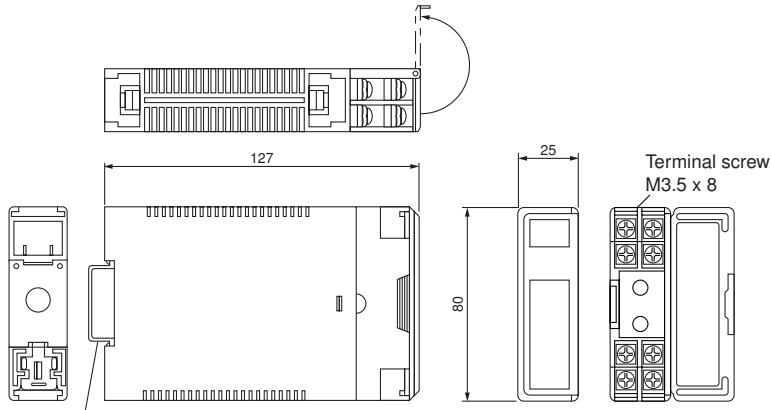

35mm wide IEC rail

Mass: Approx. 200g


• Screw mounting

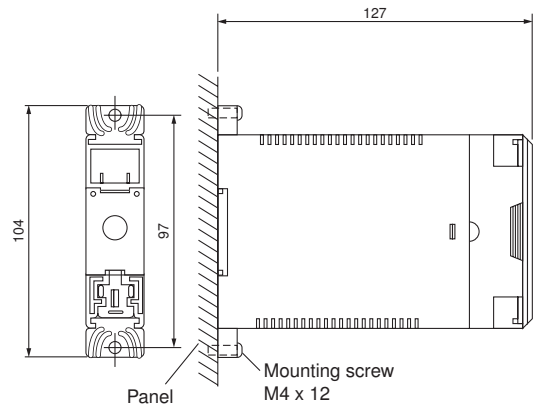


Panel drilling

One-unit mounted

n-unit mounted

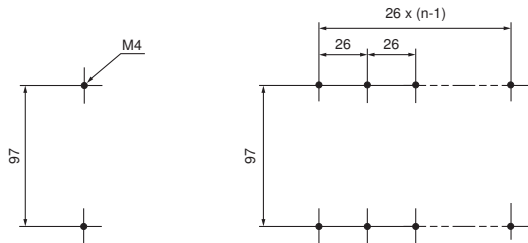

■ Wiring diagram

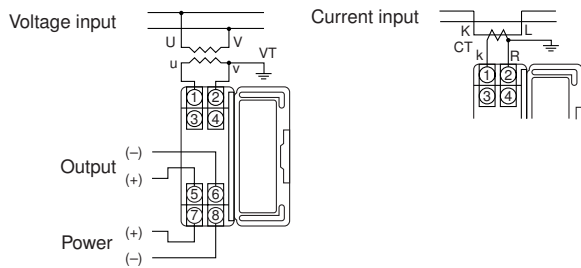


CN232 and CN233 arresters (surge protective devices) for low voltage circuit

■ Description

Arresters (surge protective devices) protect devices connected to power supplies from lightning damage by absorbing inductive lightning surges from power supply.

■ Features

- Normal-mode surges and common-mode surges can be absorbed using only one arrester.
- Coordinated operation of 2 types of varistor enables extremely fast response to surges and a high level of surge absorption.
- Built-in thermal fuses prevent problems such as short-circuit due to deterioration of elements.
- Indicators for easy confirmation of device status (i.e., normal or malfunction)
- Integrated terminal construction reduces space and wiring requirements for easier handling of the arrester.
- Mount to rails, using screws, or to brackets for standardized distribution boards.
- Standard-feature terminal cover to protect against electrical shock

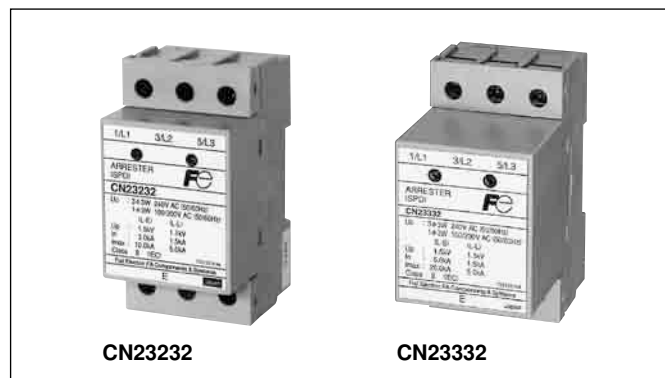

■ Applications

- Electronic devices, such as computers, measurement devices, and communications devices
- Inverters
- Electronic devices inside distribution boards (e.g., power distribution boards and lighting distribution boards)

■ Specifications

Type	CN23211	CN23212	CN23232	CN2324E	CN2324L	
Applicable circuit and rated voltage (max. continuous operating voltage) Uc (50/60Hz)	Single-phase, 2-wire, 120V	Single-phase, 2-wire, 240V	Single-phase, 3-wire, 100/200V	3-phase, 3-wire, 240V	3-phase, 3-wire, 440V (voltage to ground)	3-phase, 3-wire, 440V (between wires)
Test class (JIS C 5381-1)	Class II					
Max. discharge current I _{ma} x (8/20μs)	Voltage to ground	10kA	10kA	10kA	10kA	–
	Between wires	5kA	5kA	5kA	–	5kA
Nominal discharge current I _n (8/20μs)	Voltage to ground	5kA	5kA	5kA	5kA	–
	Between wires	1.5kA	1.5kA	1.5kA	–	1.5kA
Discharge start voltage (V 1mA)	Voltage to ground	420 to 520V	610 to 750V	610 to 750V	990 to 1,210V	–
	Between wires	240 to 310V	420 to 520V	420 to 520V	–	800 to 1,100V
Voltage protection level (Up)	Voltage to ground	1,100V max.	1,500V max.	1,500V max.	2,500V max.	–
	Between wires	700V max.	1,100V max.	1,100V max.	–	2,000V max.
Operating environment	Temperature: –20 to 60°C, Humidity: 95% max. RH (no icing or condensation)					
Connection terminals/connection wires	Screw terminal connection: M5 (with protective cover for charged parts)					
	Applicable connection wire: 2 to 14mm, Max. round crimp terminal width: 12.4mm (nominal size: JIS C 2805 R14-5), Tightening torque: 2.0 to 2.5 N·m					
Dimensions (L x W x H)	95 x 50 x 60 mm					

■ Specifications

Type	CN23311	CN23312	CN23332	CN2334E
Applicable circuit and rated voltage (max. continuous operating voltage) Uc (50/60Hz)	Single-phase, 2-wire, 120V	Single-phase, 2-wire, 240V	Single-phase, 3-wire, 100/200V	3-phase, 3-wire, 240V 3-phase, 3-wire, 440V (voltage to ground)
Test class (JIS C 5381-1)	Class II			
Max. discharge current I _{ma} x (8/20μs)	Voltage to ground	20kA	20kA	20kA
	Between wires	5kA	5kA	5kA
Nominal discharge current I _n (8/20μs)	Voltage to ground	5kA	5kA	5kA
	Between wires	1.5kA	1.5kA	1.5kA
Discharge start voltage (V 1mA)	Voltage to ground	420 to 520V	610 to 750V	610 to 750V
	Between wires	240 to 310V	420 to 520V	420 to 520V
Voltage protection level (Up)	Voltage to ground	1,100V max.	1,500V max.	1,500V max.
	Between wires	700V max.	1,100V max.	1,100V max.
Operating environment	Temperature: -20 to 60°C, Humidity: 95% max. RH (no icing or condensation)			
Connection terminals/connection wires	Screw terminal connection: M5 (with protective cover for charged parts) Applicable connection wire: 2 to 14mm, Max. round crimp terminal width: 12.4mm (nominal size: JIS C 2805 R14-5), Tightening torque: 2.0 to 2.5 N·m			
Dimensions (L x W x H)	95 x 50 x 83 mm			

• Selection table for power supply arresters and arrester shunts

Arrester shunt	Plug fuse		Circuit breaker			
Max. discharge current	10kA	20kA	10kA			
Type	AFaC-30X x 3 (rail mounting)*	AFaC-60 x 3	EA33AC/30	SA33C/30	SA53C/30	SA53RC/30
Interrupting capacity	600V AC 100kA		220V AC 2.5kA 440V AC 1.5kA	220V AC 5kA 440V AC 2.5kA	220V AC 10kA 440V AC 7.5kA	220V AC 25kA 440V AC 10kA

Arrester shunt	Circuit breaker					
Max. discharge current	20kA					
Type	EA53AC/50	EA53C/50	SA53C/50	SA53RC/50	SA63RC/60	SA103C/60
Interrupting capacity	220V AC 2.5kA 440V AC 1.5kA	220V AC 5kA 440V AC 2.5kA	220V AC 10kA 440V AC 7.5kA	220V AC 25kA 440V AC 10kA	220V AC 25kA 440V AC 10kA	220V AC 50kA 440V AC 25kA

* If required, separately order a protective cover for charged parts (30A). (Type number: CG-30)

■ Type number nomenclature

CN23 2 32

Rated voltage

- 11: Single-phase 2-wire, 120V
- 12: Single-phase 2-wire, 240V
- 32: 3-phase 3-wire, 240V
Single-phase 3-wire, 100/200V
- 4E: 3-phase 3-wire, 440V (for common-mode surges)
- 4L: 3-phase 3-wire, 440V (for normal-mode surges)

Discharge current (ground)

- 2: 10kA 3: 20kA

Basic type

■ Ambient conditions


- Ambient operating temperature: -20 to 50°C (No condensation)
- Relative operating humidity: 45 to 85% (No condensation)
- For indoor use

■ Ordering information


- Specify the following :
1. Type number or ordering code

Internal circuit diagrams


CN23211, CN23212
CN23311, CN23312




CN23232
CN23332



CN2324E
CN2334E




CN2324L




F: Thermal fuse
L: Indicator
Z₁, Z₂: Components for surge protective devices

Application examples


Single-phase 2-wire, 120V, 240V AC

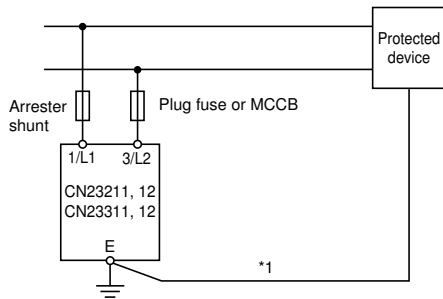


Single-phase 3-wire, 100/200V AC

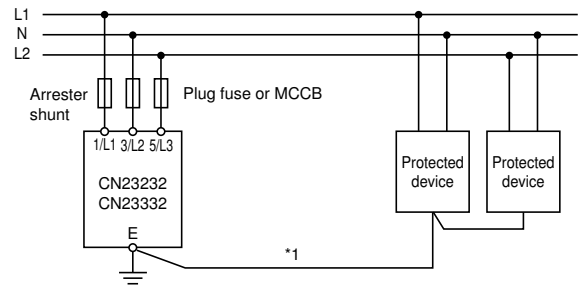

3-phase 3-wire, 240V AC

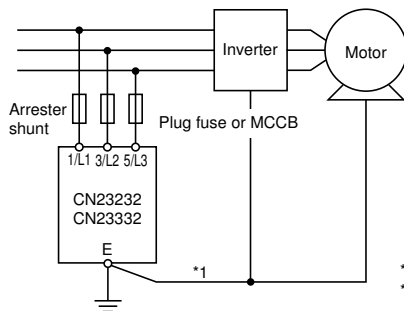


3-phase 3-wire, 440V AC

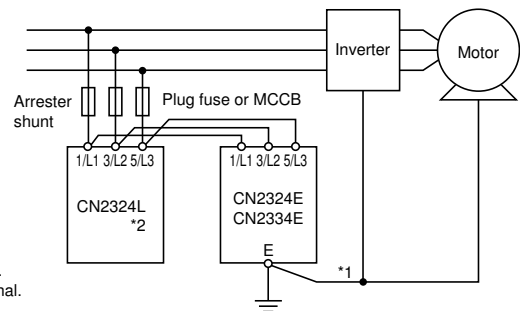


*1 Male the connection at the shortest distance.
*2 Do not wire to the black-colored screw terminal.

Dimensions, mm
CN232

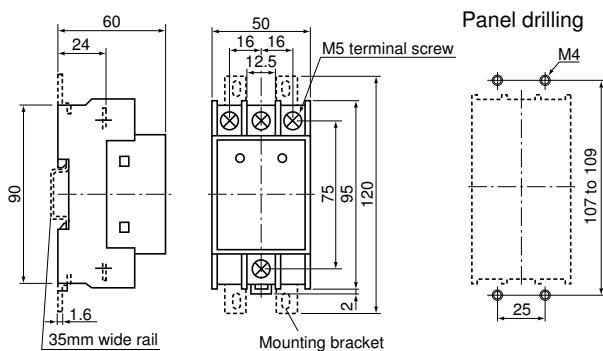


CN233

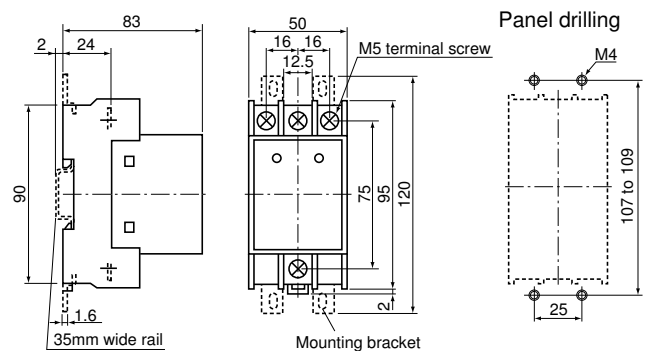

CN226 series arresters (surge protective devices) for signal line and control circuit

■ **Features**

- Highly effective surge suppression using protection method combining gas discharge tube, varistor, and avalanche diode.
- Large surge discharge current
- Fast response to surges reduces influence on device.
- A comprehensive lineup to suit all kinds of signal line applications (e.g., transducers, remote terminals, and sensors).
- Simple mounting to IEC rail.
- The arrester mounts to the terminal block using a plug-in connection for simple inspection and replacement. Signal lines are not opened even if the arrester is removed.

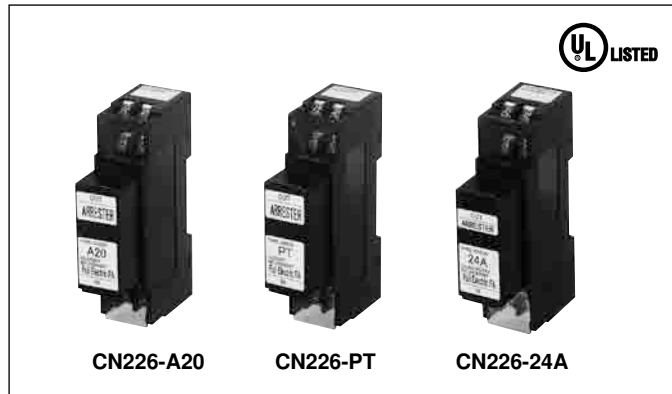

■ **Specifications**


• **For signal line circuit**

Type	CN226-A20	CN226-A50	CN226-TC	CN226-PT	CN226-PM	CN226-SP	CN226-24	CN226-48	CN226-100	
Application	4-20mA	10-50mA	Thermocouple	Resistance thermometer	Potentiometer	Slow pulse	24V DC	48V DC	100V DC	
Rated voltage	24V DC	48V DC	5V DC	8V DC	5V DC	12V DC	24V DC	48V DC	100V DC	
Rated current	100mA						200mA			
Leakage current	5μA max.		10μA max.	2μA max.	10μA max.		5μA max.			
Operation start voltage (V1mA)	Between wires	30V min.	61V min.	6.7V min.	11V min.	6.7V min.	14V min.	30V min.	60V min.	150V min.
	Voltage to ground	150V min.								180V min.
Clamping voltage (Vp)	Between wires	40V max.	100V max.	14V max.	22V max.	14V max.	25V max.	55V max.	130V max.	700V max.
	Voltage to ground	300V max.								800V max.
Internal resistance	10Ω 10% (Single)			2Ω 10% (Single)	10Ω 10% (Single)		1Ω 10% (Single)			
No. of ports	2-port, combination type									
Response time	0.1μs max.									
Max. discharge current (8/20μs)	Between wires	5,000A								
	Voltage to ground	10,000A								

• **For control power supply circuit**

Type	CN226-24A	CN226-48A	CN226-100B	
Application	24V AC/DC	48V AC/DC	100V AC/DC	
Rated voltage	24V AC/DC	48V AC/DC	100V AC/DC	
Rated current	2A			
Leakage current	10A max.			
Operation start voltage (V1mA)	Between wires	40V min.	84V min.	370V min.
	Voltage to ground	300V min.		400V min.
Clamping voltage (Vp)	Between wires	250V max.	400V max.	850V max.
	Voltage to ground	400V max.		1,000V max.
Internal resistance	-	-	-	
No. of ports	1-port, combination type			
Response time	0.1μs max.			
Max. discharge current (8/20μs)	Between wires	2,000A		5,000A
	Voltage to ground	2,000A		5,000A

■ **Type number nomenclature**

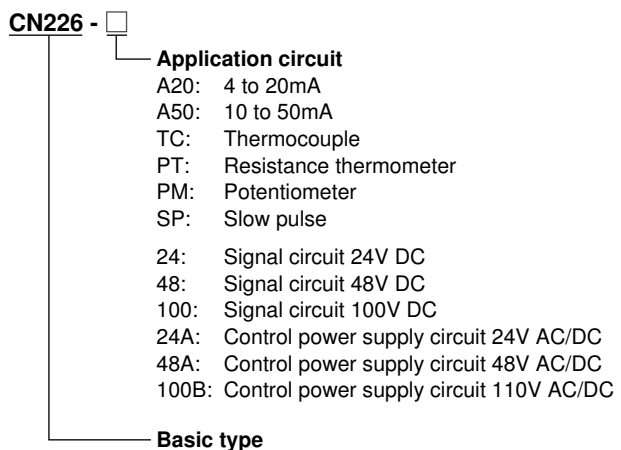

■ **UL-approved type (Applicable standard: UL 497B File No. E253735)**

Category	Signal circuit								
Type number (i.e., product code)	CN226-A20	CN226-A50	CN226-TC	CN226-PT	CN226-PM	CN226-SP	CN226-24	CN226-48	
Application	4-20mA	10-50mA	Thermocouple	Resistance thermometer	Potentiometer	Slow pulse	24V DC	48V DC	

* Refer to the table above or rated specifications, prices, and shipment.


■ **Ambient conditions**

- Ambient operating temperature: -20 to 50°C (No condensation)
- Relative operating humidity: 45% to 85% (No condensation)
- For indoor use




■ **Ordering information**

- Specify the following:
1. Type number or ordering code



Internal wiring





*1: Connection can be made regardless of polarity.



*2: Be careful of polarity when making the connection.

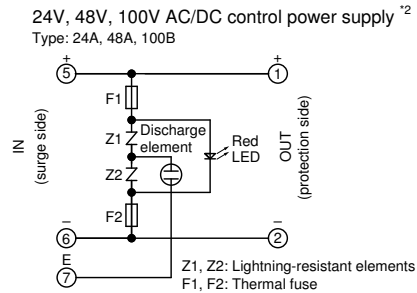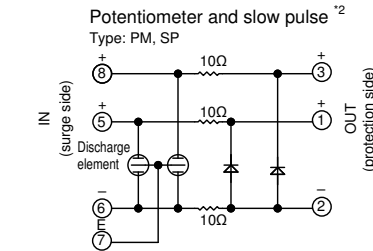


Application circuit example

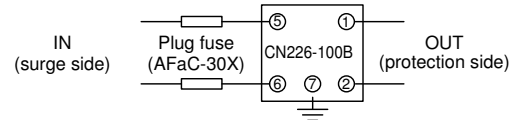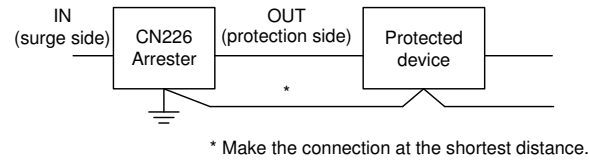


Note: When using a CN226-100A arrester, use a plug fuse (AFaC-30X) for disconnection and short-circuit protection.

Note for CN226-TC thermocouple

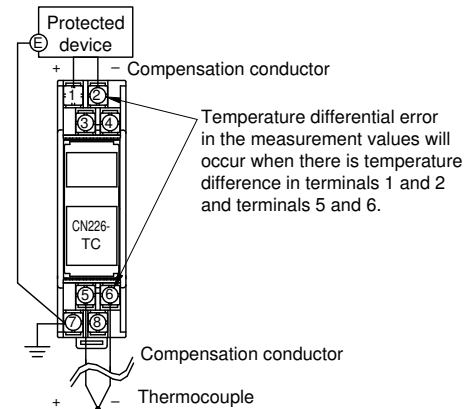

Dimensions, mm

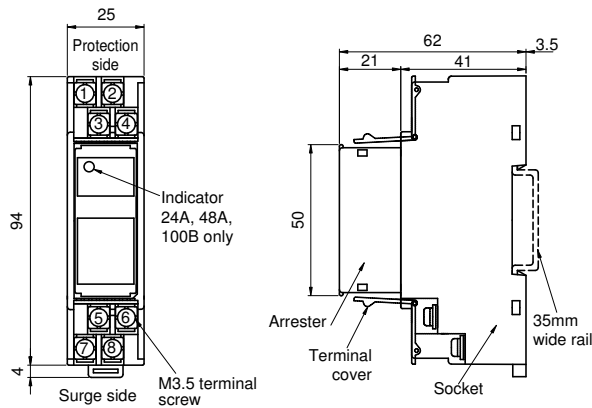

Operating precautions

- Install the arrester as close as possible to the protected device.
- Be sure to securely connect the grounding terminal (E terminal) to the grounding terminal of the panel. Consecutively ground the protected device and the arrester at the shortest distance using a grounding wire of 2mm² min. with grounding on the arrester side.
- Use an arrester that is appropriate for the operating voltage and application. Incorrect application may result in failure or loss of protection.
- Remove the arrester from the socket before performing a withstand test or insulation resistance test on the device. Incorrect testing may damage the arrester or result in measurement value errors.
- Use a DC power supply with the following specifications to connect to the signal arrester.
Using a large-capacity power supply may result in damage or fire due to inability to interrupt the short-circuit current that flows when the arrester operates.
Applicable types: CN226-24, CN226-48, CN226-100
DC power supply: CN226-24: 24V DC, 40W max., 1.7A max.,
CN226-48: 48V DC, 30W max., 0.6A max.,
CN226-100: 100V DC, 40W max., 0.4A max.

■ Features

The arrester protects network circuits from lightning surges.

- Communications networks are supported (e.g., 10Base-5, 100Base-TX, RS-485, PLC T-Link).
- Ideal design for applications with high-performance in protection against lightning surges.
- Support for CN227-EBT
High-speed communications (100Mbps min.) enables high-performance response to surges.
Compact, lightweight, and easy to connect (RJ-45 modular connector).
- CN227-EB5
Extremely small signal loss enables high-performance response.
Easy installation and replacement (mounting bracket and grounding wire included).
- CN227-RS42, RS44
The body is slim (22.5mm wide) and European-style terminal blocks are used.
Types are available to support 2-wire (RS42) or 4-wire (RS44).
The arrester provides a long service life and high surge resistance (10kA, 8/20 μ s) and protection characteristics that satisfied categories C2 and D1 of the JIS C 5381-21 standard.



■ Ratings, specifications, models, product codes, prices (excluding tax), and shipment

Type	CN227-EBT	CN227-EB5	CN227-RS42	CN227-RS44
Application	Ethernet 10Base-T 100Base-TX	Internet 10Base-5	RS-485, PLC (T link), remote terminals, 60V DC max. signal circuits	2-wire 4-wire
Max. continuous operating voltage (Uc)	52V DC	3.5V DC	60V DC	
Rated current	100mA	100mA	500mA	
Transmission frequency bandwidth	DC 0 to 100MHz	DC 0 to 20MHz	DC 0 to 2MHz	
Insertion loss	2dB max.	0.5dB max.	1dB max.	
Transmission speed/DC resistance	100Mbps	10Mbps	DC resistance: 0.1 Ω max.	
DC operating voltage (V 1mA)/DC discharge start voltage (100V/s)	Between wires	–	DC4.5V \pm 15% (100V/s)	DC82V \pm 10% (V _{1mA})
	Voltage to ground	DC65V \pm 15% (100V/s)	DC90V \pm 25% (100V/s)	DC90V \pm 20% (100V/s)
Voltage protection level (impulse limit voltage) (Up)	Between wires *1	150V max.	40V max.	400V max.
	Voltage to ground	150V max.	350V max.	400V max.
Impulse withstand *2	Category C2 (8/20 μ s)	500A	10kA	10kA
	Category D1 (8/350 μ s)	–	–	2.5kA
Environment	Temperature: –20 to 60°C, Humidity: 95% max. RH (no icing or condensation)			
Interface and applicable connection wire	Modular (RJ-45)	Coaxial tap (transceiver connection)	Screw terminal connection method Solid wire: 0.4 to 1.6mm dia., stranded wire: 0.14 to 2.5mm ²	
Mechanical durability	Vibration resistance (durability)	–	–	Frequency: 10 to 55Hz, Double amplitude: 0.75mm (4.5G max.), 2 hours in each direction for a total of 6 hours
Dimensions (L x W x H)	(Thickness: Oval) 35 x 40 x (length) 81 mm	28 x 67 x 119 mm	90 x 22.5 x 70 mm	

Note *1: This gives the value when lightning surge voltage is applied between wires with one wire grounded.


*2: This gives the total value for voltage to ground for each wire. Category C2 indicates the current value with power applied 5 times each for positive and negative polarities at a current waveform of 8/20 μ s, and category D1 indicates the current value with power applied one time each for positive and negative polarities at a current waveform of 10/350 μ s.




MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

Internal wiring


CN227-EBT

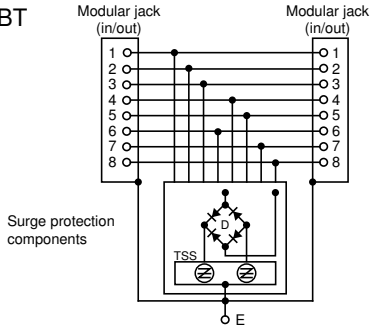


CN227-EB5

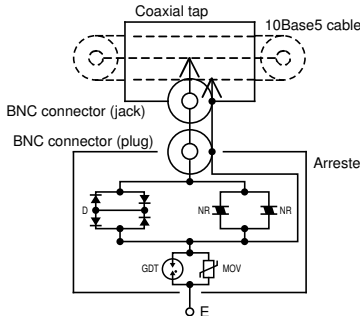

CN227-RS42

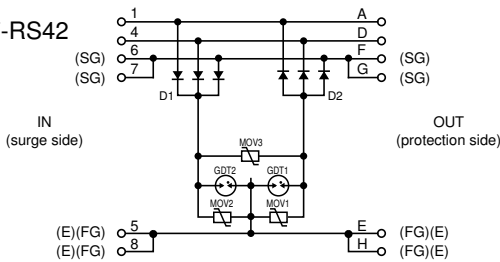


CN227-RS44

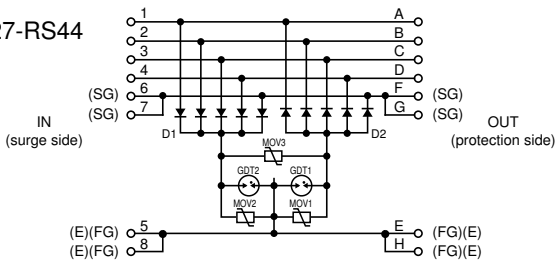


Dimensions, mm


CN227-EBT

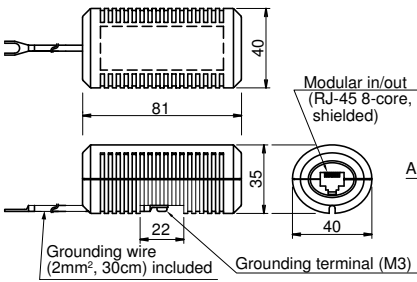

CN227-EB5

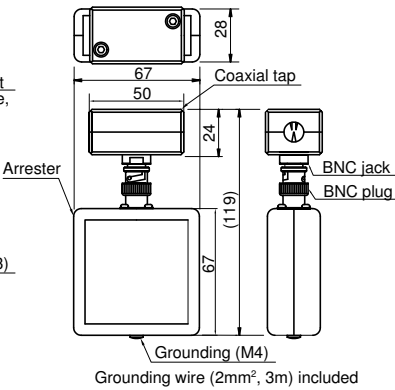


CN227-RS42, -RS44

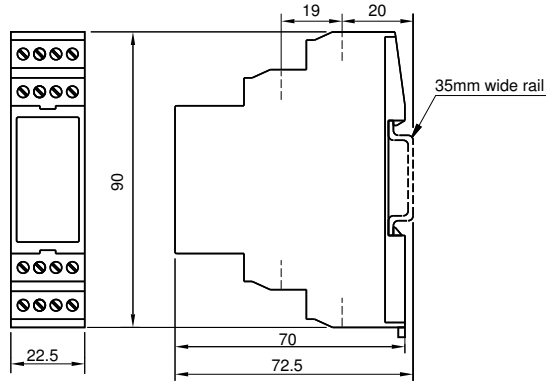


■ Application circuit example


CN227-EBT

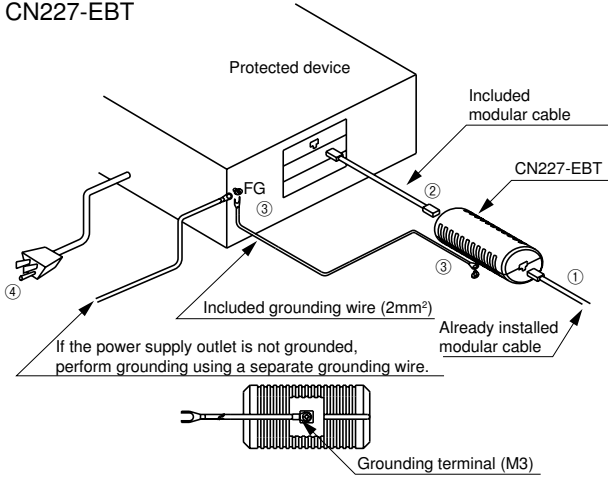


CN227-EB5

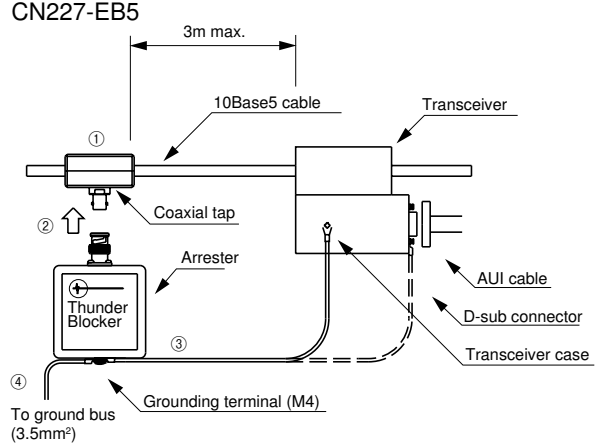

■ Wiring method

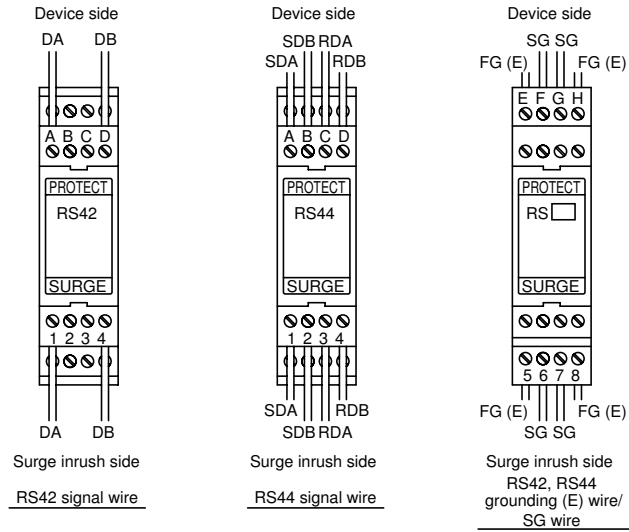

■ Grounding wiring

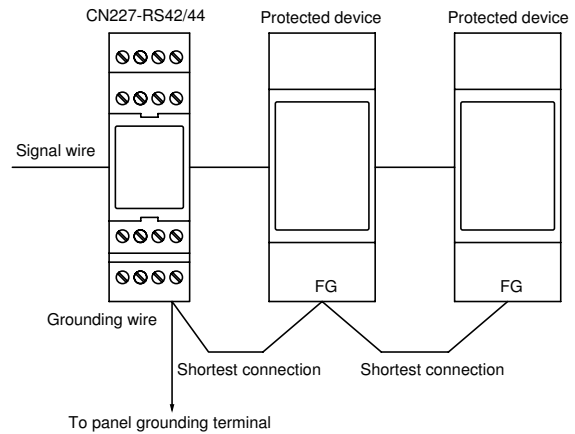

The arrester protects network circuits from lightning surges.

• **CN227-RS44A**

■ **Application**

- Devices are protected from lightning surges that may enter instrument cables or control cables of RS-485, 24V DC-max. signal circuits.

■ **Features**

- Entrance of high-frequency noise from arrester grounding circuits is prevented.
- Protection characteristics satisfy categories C2 and D1 of the JIS C5381-21 standard.
- Use of screwless connection terminals eliminates the need for crimp terminals.
- IEC rail mounting.

• **CN227-350S**

■ **Application**

- Broadcasting equipment is protected from lightning surges that may enter broadcasting speaker circuits or 100/200V-AC contact signal circuits.

■ **Features**

- Protection characteristics satisfy categories C2 and D1 of the JIS C5381-21 standard.
- Use of screwless connection terminals eliminates the need for crimp terminals.
- IEC rail mounting.

• **CN227-SD**

■ **Application**

- Communications equipment is protected from lightning surges that may enter telephone lines or other communications lines.

■ **Features**

- Protection characteristics satisfy categories C2 and D1 of the JIS C5381-21 standard.
- Use of screwless connection terminals eliminates the need for crimp terminals.
- IEC rail mounting.

• **CN227-UCP**

■ **Application**

- Communications equipment is protected from lightning surges that may enter telephone lines or other communications lines.

■ **Features**

- Support for UCS (universal connection system).
- Modular plug-in for high-density wiring system.
- Equipped with failure display.



• **CN227-NT**

■ **Application**

- Equipment is protected from lightning surges that may enter coaxial cables of ITV and monitor cameras or data transmission devices.

■ **Features**

- Ideal protection for ITV coaxial lines with weak withstand voltage.
- Transmission noise is absorbed with improved production characteristics by combining gas discharge tubes at noise filters.
- Protection characteristics satisfy categories C2 and D1 of the JIS C5381-21 standard.
- IEC rail mounting.
- Ideal for transmission lines on which a DC power supply(30V DC, 250mA max.) is superimposed on the coaxial.

• **CN227-TV**

■ **Application**

- Devices are protected from lightning surges that may enter coaxial cables for a satellite digital TV.

■ **Features**

- Composed with coaxial connectors and high-performance gas discharge tubes.
- Compact size with high impulse resistance.
- Excellent transmission performance (large frequency bandwidth and little insertion loss).

■ Ratings, specifications, types, prices (excluding tax), and shipment


Type	CN227-RS44A		CN227-350S	CN227-SD
Application	RS-485, remote terminals, 24V DC max. signal circuits		Broadcasting speaker circuits 100/200V AC contact signal circuits	General telephone lines
	Low electrostatic capacity, 4-wire		4-wire	2-wire
Max. continuous operating voltage (Uc)	27V DC		275V AC/350V DC	180V DC
Rated current	100mA		2A	120mA
Transmission frequency bandwidth	DC 0 to 500kHz		DC 0 to 100MHz	DC 0 to 5MHz
Insertion loss	1dB max.		1dB max.	1.5dB max.
Transmission speed/DC resistance	DC resistance: 5Ω±10% (1 wire)		DC resistance: 0.5Ω max.	DC resistance: 20Ω max. (1 wire)
DC operating voltage (V _{1mA})/DC discharge start voltage (100V/s)	Between wires	–	–	–
	Voltage to ground	Between 1, 2, 3, 4-5, 8: 33V±10% DC (V _{1mA}) Between 5, 8-6, 7: 90V±20% DC (100V/s)	Between 1, 2, 3, 4-5, 8: 470V±10% DC (V _{1mA}) Between 5, 8-6, 7: 90V±20% DC (100V/s)	230V DC±20% (100V/s)
Voltage protection level (impulse limit voltage) (Up)	Between wires *1	Between A, B, C, D: 100V max.	Between A, B, C, D: 1,300V max.	400V max.
	Voltage to ground	Between A, B, C, D-E, H: 100V max. Between E, H-F, G: 600V max.	Between B, C, D-E, H: 1,300V max. Between E, H-F, G: 600V max.	400V max.
Impulse withstand *2	Category C2 (8/20μs)	10kA	10kA	10kA
	Category D1 (8/350μs)	2.5kA	0.5kA	5kA
Environment	Temperature: –20 to 60°C, Humidity: 95% max. RH (no icing or condensation)			
Interface and applicable connection wire	Screw terminal connection method Solid wire: 0.4 to 1.6mm dia., stranded wire: 0.14 to 2.5mm ²			
Mechanical durability	Vibration resistance (durability)	Frequency: 10 to 55Hz, Double amplitude: 0.75mm (4.5G max.), 2 hours in each direction for a total of 6 hours		
Dimensions (L x W x H)	90 x 22.5 x 70 mm			

Type	CN227-UCP		CN227-NT	CN227-TV
Application	General telephone lines (modular) 2-wire		ITV and monitor cameras	Satellite digital TV
Max. continuous operating voltage (Uc)	170V DC		30V DC	60V DC
Rated current	130mA		250mA	500mA
Transmission frequency bandwidth	DC 0 to 10MHz		DC 0 to 10MHz	DC 0 to 2.2GHz
Insertion loss	1dB max.		1.5dB max.	0.5dB max.
Transmission speed/DC resistance	DC resistance: 13Ω max. (1 wire)		DC resistance: 4Ω max.	–
DC operating voltage (V _{1mA})/DC discharge start voltage (100V/s)	Between wires	–	–	–
	Voltage to ground	175 to 275V DC (100V/s)	90V DC±20% (100V/s)	90V DC±20% (100V/s)
Voltage protection level (impulse limit voltage) (Up)	Between wires *1	300V max.	250V max.	–
	Voltage to ground	300V max.	250V max.	600V max. (between central conductor and external conductor)
Impulse withstand *2	Category C2 (8/20μs)	10kA	10kA	10kA
	Category D1 (8/350μs)	2.5kA	2.5kA	2.5kA
Environment	Temperature: –20 to 60°C, Humidity: 95% max. RH (no icing or condensation)			
Interface and applicable connection wire	Plug-in solid wire: 0.4 to 0.8 dia.		BNC jack - BNC jack	F jack - F jack
Mechanical durability	Vibration resistance (durability)	–	Frequency: 10 to 55Hz, Double amplitude: 0.75mm (4.5G max.), 2 hours in each direction for a total of 6 hours	
Dimensions (L x W x H)	19 x 9.5 x 59.5 mm		60 x 32 x 91 mm	(Thickness) 28 x 30 x (length) 60 mm

Note *1: This gives the value when lightning surge voltage is applied between wires with one wire grounded.

*2: This gives the total value for voltage to ground for each wire. Category C2 indicates the current value with power applied 5 times each for positive and negative polarities at a current waveform of 8/20μs, and category D1 indicates the current value with power applied one time each for positive and negative polarities at a current waveform of 8/350μs.

Internal wiring

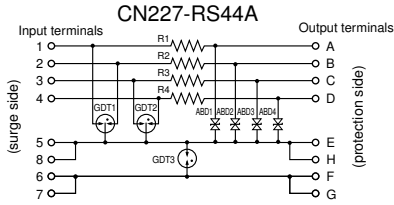


Terminal number
Protection of device with low withstand voltage between signal line and grounding wire

Terminal name	Signal line terminal	Ground terminal
surge side	1/2/3/4	5/8 (to ground pole)
protection side	A/B/C/D	E/H (to device case)

Reducing electrostatic capacity between signal line and ground line

Terminal name	Signal line terminal	Ground terminal
surge side	1/2/3/4	6/7 (to ground pole)
protection side	A/B/C/D	F/G (to device case)




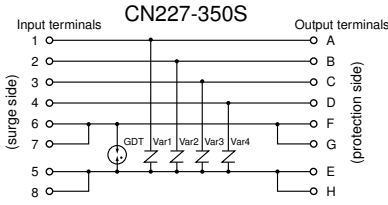


Terminal number
Protection of device with low withstand voltage between signal line and grounding wire

Terminal name	Signal line terminal	Ground terminal
surge side	1/2/3/4	5/8 (to ground pole)
protection side	A/B/C/D	E/H (to device case)


Relay contact signal circuit

Terminal name	Signal line terminal	Common terminal	Ground terminal
surge side	1/2/3/4	5/8	6/7 (to ground pole)
protection side	A/B/C/D	E/H	E/H (to device case)

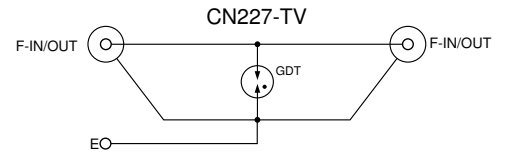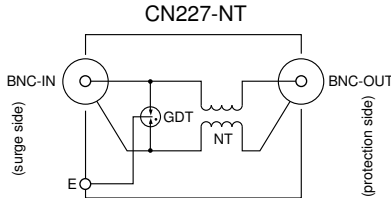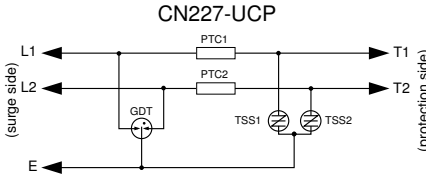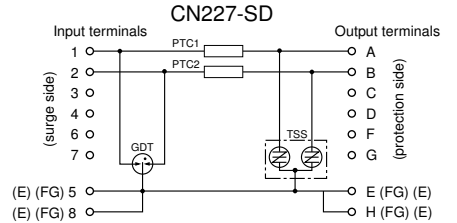


Dimensions, mm


CN227-RS44A, -350S, -SD

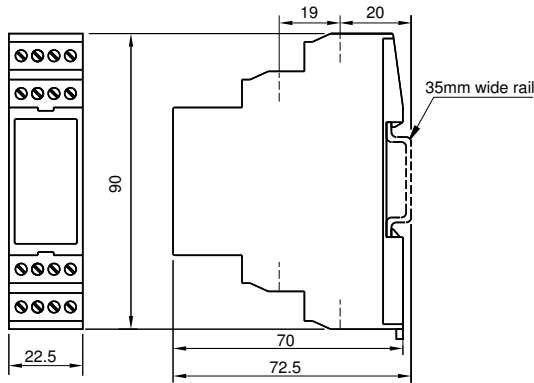


CN227-UCP

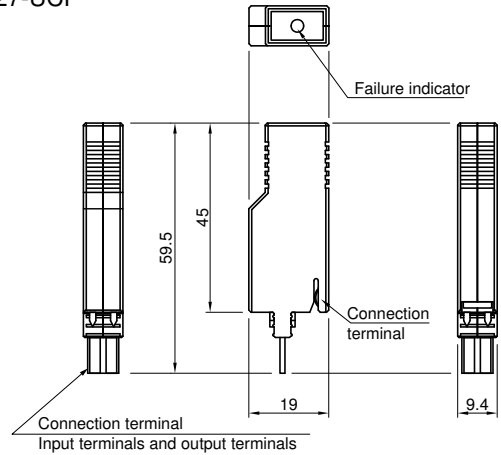

CN227-NT

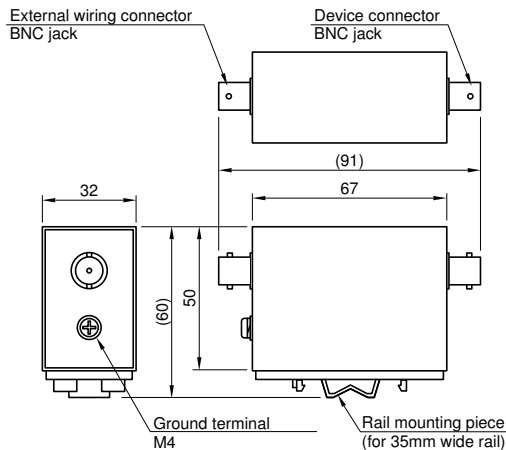

CN227-TV

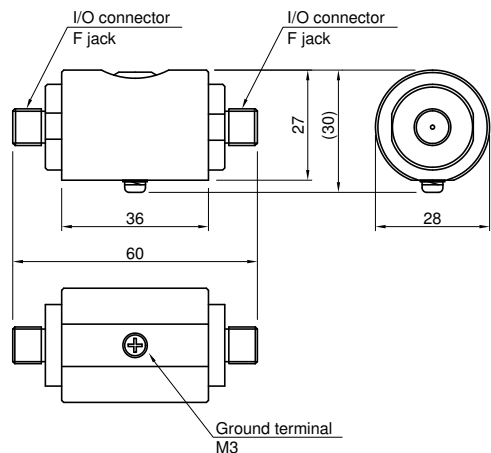

■ Overview and features

- The AS-i arrester protects AS-interface modules connected to AS-i networks and networks from overvoltage due to inductive lightning surge and switching surge.
- Only the AS-i arrester is required to protect AS-i signal circuits and auxiliary power supply circuits.
- The construction, network connectivity, and protection level (IP67) of the AS-i arrester are the same as for waterproof connector slaves (slim type).
- The AS-i arrester does not require assigning addresses in the AS-interface network.
- A FM6B1-04FE or FM6B2-04FE slave base is required to connect the AS-interface cable (yellow) and auxiliary power supply cable (black).



■ Ratings, specifications, types, prices (excluding tax), and shipment


Type	CN227-ASI	
Application	AS-i signal circuit	Auxiliary power supply circuit
Max. continuous operating voltage (Uc)	31.6V DC	30V DC
Rated current (In)	0.5A	5A
Insertion loss: DC 0 to 5MHz (110Ω)	0.2dB max.	-
Electrostatic capacity (100kHz)	Between wires	100pF max.
	Voltage to ground	10pF max.
Voltage protection level (Up)	Between wires	100V max.
	Voltage to ground	700V max.
Impulse withstand category C2 *1	Between wires	8/20μs 400A
	Voltage to ground	8/20μs 1000A
Impulse withstand current *2	Between wires	8/20μs 400A
	Voltage to ground	8/20μs 2000A

Type	CN227-ASI		
Application	AS-i signal circuit	Auxiliary power supply circuit	
DC operating voltage	Between wires	DC39V±10% (V=5mA)	DC39V±10% (V=5mA)
	Voltage to ground	DC90V±20 (100V/s)	DC82V±10% (V=1mA)
Operating environment	Temperature: -20 to 60°C, Humidity: 95% max. (no condensation)		
Shock resistance	Rail mounting	150m/s ² (11ms)	
Vibration resistance	Rail mounting	10 to 55Hz, 0.5mm single amplitude	


Note *1: Impulse withstand category C2 indicates the performance that is possible with power applied 5 times for positive and negative polarities at a current waveform of 8/20μs.

*2: Impulse withstand current indicates the performance possible with power applied for 1 time max. at a current wavelength of 8/20μs.


■ Internal wiring

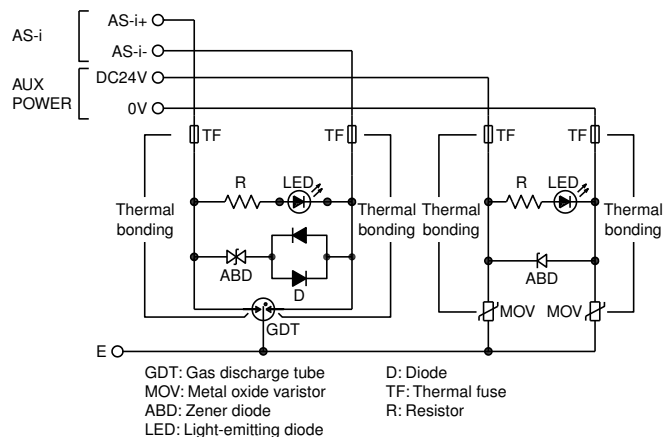

■ Dimensions, mm

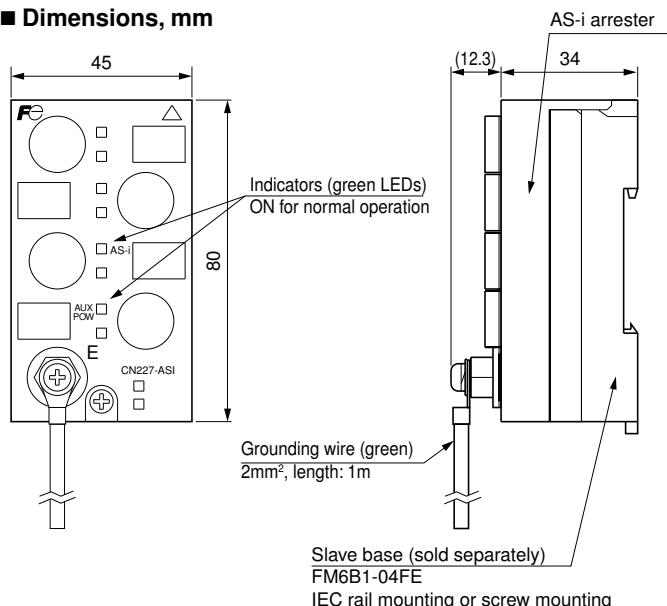

■ Application circuit example

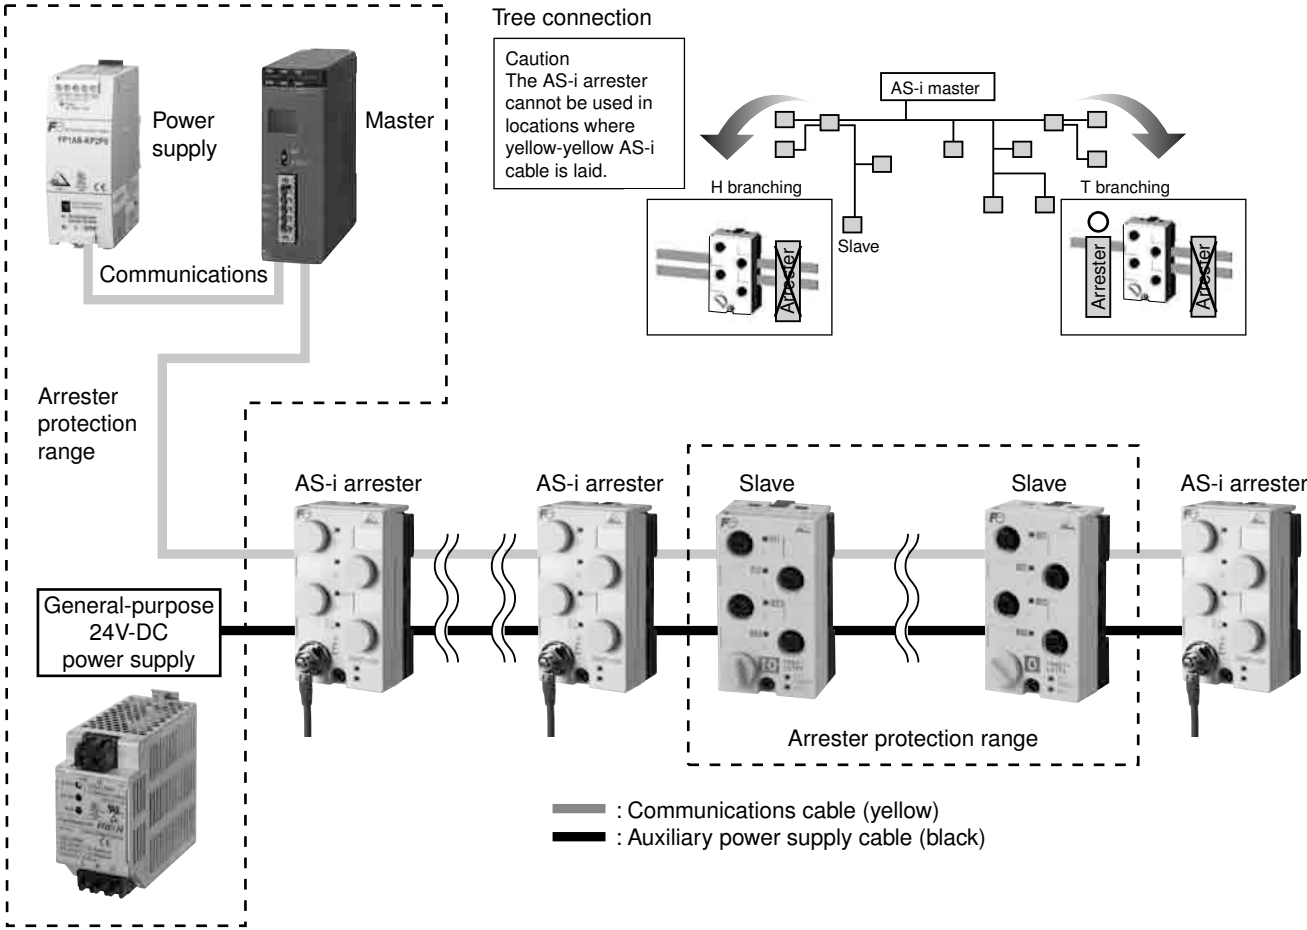

■ Features

Single-pole arrester with gas discharge tube. Is important to use the same equipotential bonding and ground when building systems to protect against lightning.

Sometimes, however, various types of grounds are independently installed inside equipment, and grounding circuit arresters enable potential equalization between grounding polls.


- CN2340: Used when the same ground cannot be used between power circuits.
(For example, performing grounding with provisions based on electrical equipment technology standards, such as independent B-type grounding.)
- CN2341: Used when the same ground cannot be used for power circuits and control circuits.
(For example, performing independent grounding of devices to prevent noise from entering, such as with inverter grounding.)
- With a rail mounting construction that is 18mm wide, the design is ideal for applications.



■ Ratings, specifications, types, prices (excluding tax), and shipment


Type	CN2340	CN2341
Application	Between ground and grounded circuits Grounding between power circuits	Between ground and grounded circuits Grounding between power circuits and control circuits
Test class	Class I/II	Class I/II
Voltage protection level (Up) (limit voltage)	1,500V max.	800V max.
Operation start voltage	490V DC±70V	90V DC±18V
Impulse current (I imp)	10/350µs 5kA	10/350µs 2.5kA
Nominal discharge current (In)	8/20µs 20kA	8/20µs 20kA
Max. discharge current (I max)	8/20µs 30kA	8/20µs 25kA
Connection terminals/connection wires	Screw terminal connection: M5 (for bare round crimp terminals) Recommended connection wire (stranded wire: 3.5 to 14mm ²) Round crimp terminal size: 3.5mm ² : R3.5 to 5 8mm ² : R8 to 5 5.5mm ² : R5.5 to 5 14mm ² : R14 to 5	
Operating environment	Temperature: -20 to 60°C, Humidity: 95% max. (no condensation)	

■ Internal wiring




GDT: Gas discharge tube

■ Application circuit example

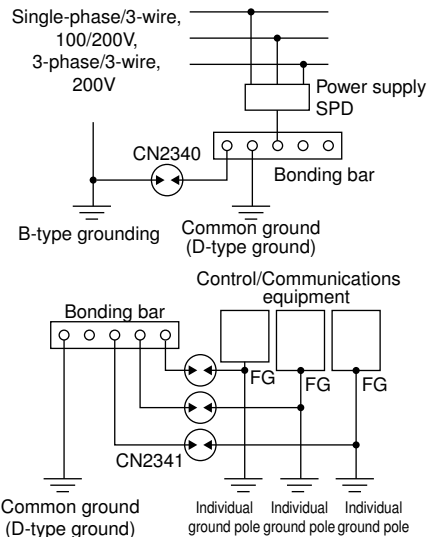

■ Dimensions, mm

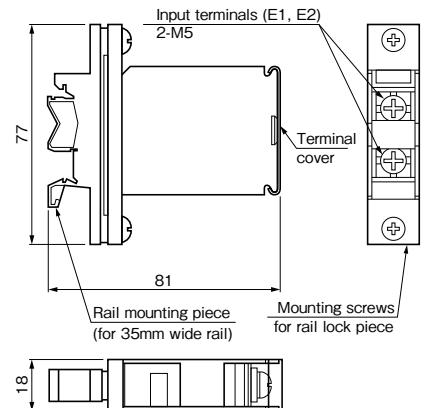

■ Description

The FUJI low-voltage instrument transformers are available as current transformers and potential transformers. These transformers have a *maximum voltage of 1150V and are suitable for circuits up to 600V. Windings have excellent mechanical, thermal and electrical performance since CT's are molded in polyester resin and VT's in epoxy resin. They are also moisture proof and have good insulation properties. The laminated iron core is made of oriented silicon steel strip. Both VT's and CT's have a class 1.0 accuracy rating, and conform to the requirements of JIS C 1731, JEC 1201 and other standards. Current transformers are available in either through-type or primary-winding versions.

*Maximum voltage: $\frac{\text{Nominal voltage}}{1.1} \times 1.15$

■ Low voltage current transformers

CC3L



AF00-103

The CC3L type is a round hole through-type current transformer. The ratio can be changed according to the number of turns of the primary windings. It has excellent insulation characteristics and is both compact and light in weight.

CC3P



AF00-102

The CC3P type is a current transformer which has a primary winding thus facilitating connection work. The installation angle can be varied from the standard position through 90°. They can be supplied with the primary current rating from 5 to 50 Amps.

CC3M



AF00-107

The CC3M type is a current transformer which has a flat terminal primary winding. It is used in the bus section of the load center or the control center. It can be mounted either horizontally or vertically.

CC2



AF99-266

The CC2D and 2C current transformers are split-types. The CTs can be mounted to existing panels, such as control centers or load centers, to measure or monitor the wattage. These can be mounted without removing existing cables for easier installation. Rated primary currents are available from 5 to 1200A.

■ Low voltage potential transformers CD 32, 34



AF00-215

The CD32 and CD34 transformers are low-voltage types. Types with a fuse of a 100kA interrupting capacity have been added to the series. This series is available for burdens of 15 and 50VA.

■ Varieties of instrument transformers

Description		Type	Burden	Primary current	Secondary current
CT	Round hole through-type	CC3L1	5VA	60-750A	5 or 1A
		CC3L2	15VA	100-750A	5 or 1A
		CC3L3	40VA	150-750A	5 or 1A, 5A
	With primary winding	CC3P1	5VA	1-50A	5 or 1A
		CC3P2	15VA	1-50A	5 or 1A
		CC3P3	40VA	1-50A	5 or 1A
	Rectangular hole through type	CC3M1	5VA	150- 600A	5A
		CC3M2	15VA	150-2000A	5 or 1A
		CC3M3	40VA	200-6000A	5 or 1A, 5A
	Split type	CC2D	0.2693mVA-0.5VA	5- 400A	7.34mA-1A
		CC2C	0.5VA	800-1200A	1A

Description		Type	Burden	Primary voltage	Secondary voltage
VT	Single-phase	CD32F	15VA	220, 440V	110V
		CD32N	15VA	220, 440V	110V
		CD34F	50VA	220, 440V	110V
		CD34N	50VA	220, 440V	110V

CC3L round hole through-type current transformers

Primary current: 60 to 750A
Secondary current: 5A or 1A


Description

The CC3L transformers are round-hole through-types. A double-mold structure gives CC3L transformers excellent moisture resistance and good insulation properties.

The CT ratio can be changed freely by changing the number of primary winding turns. Consequently, these CTs are highly adaptable and economical.

Select from a lineup of three types with rated burdens of 5VA, 15VA, and 40VA.

The mounting base can be rotated anywhere in a 90° range to facilitate installation.

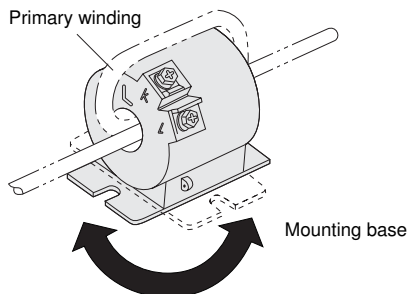


Types and ratings

Burden (VA)	Rated primary current (A)	Secondary current (A)	Accuracy class	Thermal limit current	Max voltage (kV rms.)	Dielectric strength (kV 1min)	Diameter of window (mm)	Mass (kg)	Type* (secondary current: □)					
5	60	5 or 1	1.0	40 times rated primary current, 1 second	1.15	4.0	26	1.9	CC3L1-060□					
	75								CC3L1-075□					
	100	5 or 1					1.0	40 times rated primary current, 1 second	1.15	4.0	23	0.5	CC3L1-100□	
	120												CC3L1-120□	
	150												CC3L1-150□	
	160												CC3L1-160□	
	180												CC3L1-180□	
	200												CC3L1-200□	
	250	5 or 1					1.0	40 times rated primary current, 1 second	1.15	4.0	32	0.6	CC3L1-250□	
	300												CC3L1-300□	
400	0.5		CC3L1-400□											
500	0.6		CC3L1-500□											
600		CC3L1-600□												
750	CC3L1-750□													
15	100	5 or 1	1.0	40 times rated primary current, 1 second	1.15	4.0	26	2.0	CC3L2-100□					
	120								CC3L2-120□					
	150	5 or 1					1.0	40 times rated primary current, 1 second	1.15	4.0	25	1.0	CC3L2-150□	
	160												CC3L2-160□	
	180												CC3L2-180□	
	200												CC3L2-200□	
	240												0.6	CC3L2-240□
	250													CC3L2-250□
	300	0.8					CC3L2-300□							
	400						CC3L2-400□							
500	5 or 1	1.0	40 times rated primary current, 1 second	1.15	4.0	50	0.8	CC3L2-500□						
600								CC3L2-600□						
750								CC3L2-700□						
40	150	5 or 1	1.0	40 times rated primary current, 1 second	1.15	4.0	26	2.0	CC3L3-150□					
	160								CC3L3-160□					
	180	5 or 1					1.0	40 times rated primary current, 1 second	1.15	4.0	32	1.2	CC3L3-180□	
	200												CC3L3-200□	
	240												CC3L3-240□	
	250												CC3L3-250□	
	300												CC3L3-300□	
	400												CC3L3-400□	
	500	5					1.0	40 times rated primary current, 1 second	1.15	4.0	50	0.8	CC3L3-5005	
	600												CC3L3-6005	
750	CC3L3-7505													

Notes: * Replace the □ mark by the secondary current code.

5: 5A 1: 1A

■ Type number nomenclature

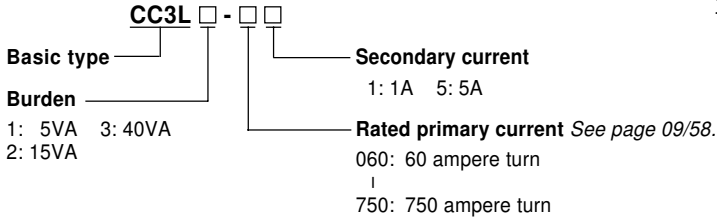


■ Ordering information


Specify the following:
1. Type number

■ Dimensions, mm


CC3L1: 100, 120, 150, 160, 180, 200A

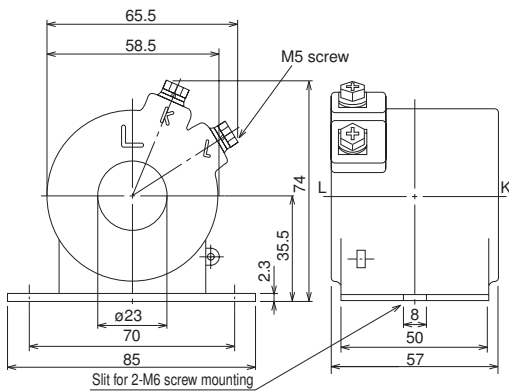


CC3L1: 250, 300, 400A
CC3L2: 240, 250, 300, 400A

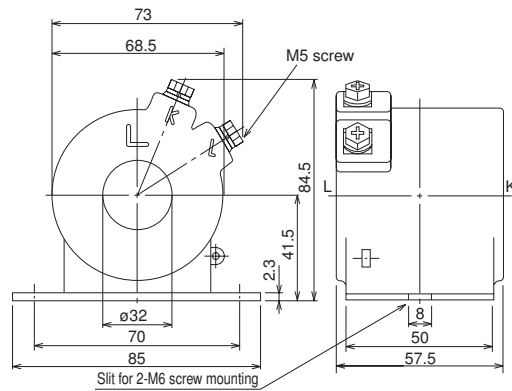


CC3L1, L2, L3: 500, 600, 750A

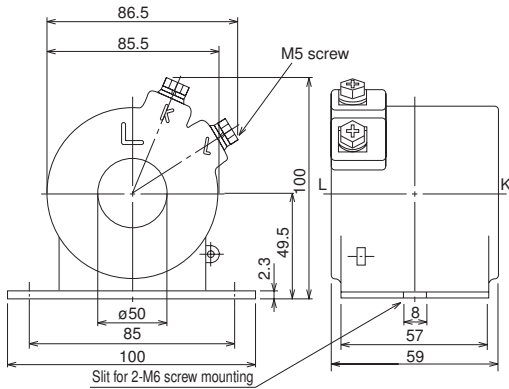


CC3L2: 150, 160, 180, 200A

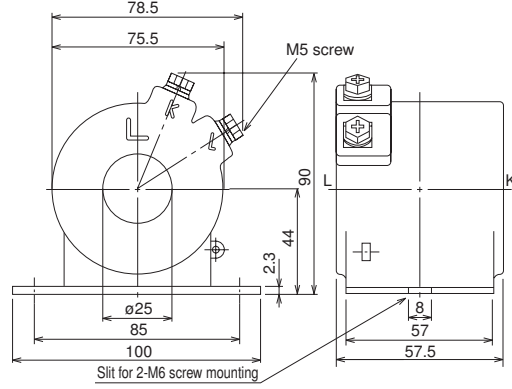

CC3L1: 60, 75A CC3L2: 100, 120A
CC3L3: 150, 160, 180, 200A

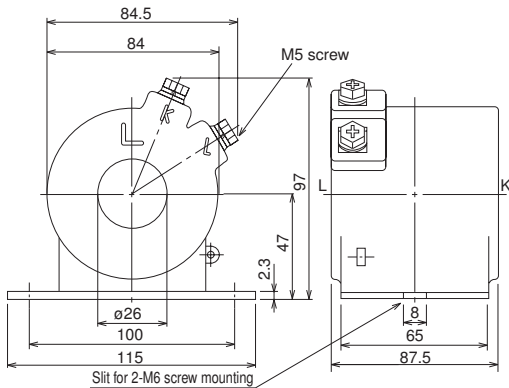

CC3L3: 240, 250, 300, 400A

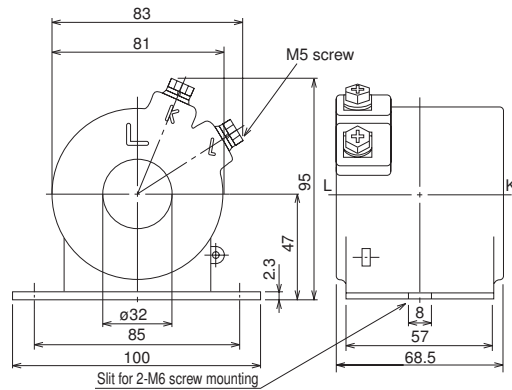

■ Number of turns in the primary winding and CT ratio

The following table lists the rated primary current, number of turns of primary windings, and the maximum nominal cross-section area

of the 600V IV cable that can pass through. (ø indicates the diameter of a single wire.) The table data satisfies allowable current for

a 600V IV cable at an ambient temperature of 40°C.

● 5VA CC3L1

Rated primary current (Ampere turn AT)	Primary current (A)	No. of turns	Primary conductor (mm ²)
60	10	6	5.5
	15	4	14
	20	3	22
	30	2	22
	60	1	150
75	15	5	8
	25	3	22
	75	1	150
100	10	10	ø2
	20	5	8
	25	4	14
	50	2	22
	100	1	150
120	15	8	5.5
	20	6	8
	30	4	14
	40	3	22
	60	2	22
	120	1	150
	150	15	10
25		6	8
30		5	8
50		3	22
75		2	22
150		1	150
160	20	8	5.5
	40	4	14
	80	2	22
	160	1	150
	180	20	9
30		6	8
60		3	22
180		1	150
200		20	10
	25	8	5.5
	40	5	8
	50	4	14
	200	1	150
	250	25	10
50		5	22
125		2	60
250		1	325
300		30	10
	50	6	14
	60	5	22
	75	4	38
	100	3	60
	150	2	60
	300	1	325
400	40	10	8
	50	8	14
	100	4	38
	400	1	325
	500	50	10
100		5	60
125		4	100
250		2	200
500		1	500
600		60	10
	75	8	38
	100	6	60
	150	4	100
	200	3	150
	300	2	200
	600	1	500
750	75	10	22
	150	5	60
	750	1	200 2 pcs.

● 15VA CC3L2


Rated primary current (Ampere turn AT)	Primary current (A)	No. of turns	Primary conductor (mm ²)	
100	10	10	5.5	
	20	5	14	
	25	4	22	
	50	2	38	
	100	1	200	
	120	15	8	8
20		6	14	
30		4	22	
40		3	22	
60		2	38	
120		1	200	
150	10	15	3.5	
	15	10	5.5	
	25	6	8	
	30	5	14	
	50	3	22	
	75	2	38	
150	1	200		
160	20	8	8	
	40	4	22	
	80	2	38	
	100	1	200	
	180	20	9	5.5
30		6	8	
60		3	22	
90		2	38	
180		1	200	
200		20	10	5.5
	25	8	8	
	40	5	14	
	50	4	22	
	100	2	38	
	200	1	200	
	240	30	8	8
40		6	14	
60		4	38	
80		3	60	
120		2	60	
240		1	325	
250		25	10	8
	50	5	22	
	125	2	60	
	250	1	325	
	300	30	10	8
		50	6	14
60		5	22	
75		4	38	
100		3	60	
150		2	60	
300		1	325	
400		40	10	8
	50	8	14	
	100	4	38	
	400	1	325	
	500	50	10	22
		100	5	60
		125	4	100
250		2	200	
500		1	500	
600		60	10	22
		75	8	38
	100	6	60	
	150	4	100	
	200	3	150	
	300	2	200	
	600	1	500	
750	75	10	22	
	150	5	60	
	750	1	200 2 pcs.	

● 40VA CC3L3

Rated primary current (Ampere turn AT)	Primary current (A)	No. of turns	Primary conductor (mm ²)
150	10	15	3.5
	15	10	5.5
	25	6	14
	30	5	14
	50	3	22
	75	2	38
160	150	1	200
	20	8	8
	40	4	22
	80	2	38
	160	1	200
180	20	9	5.5
	30	6	14
	60	3	22
	90	2	38
	180	1	200
200	25	8	8
	40	5	14
	50	4	22
	100	2	38
	200	1	200
240	40	6	14
	60	4	22
	80	3	38
	120	2	60
	240	1	325
250	25	10	8
	50	5	22
	125	2	60
	250	1	325
	300	30	10
50		6	14
60		5	22
75		4	38
100		3	60
150		2	60
300	1	325	
400	40	10	8
	50	8	14
	100	4	38
	400	1	325
	500	50	10
100		5	60
125		4	100
250		2	200
500		1	500
600	60	10	22
	75	8	38
	100	6	60
	150	4	100
	200	3	150
750	75	10	22
	150	5	60
	750	1	200 2 pcs.

Example: 100AT, secondary 5A

- 1-ampere turn 100/5A
- 2-ampere turn 50/5A

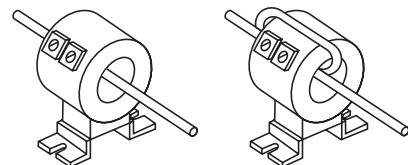


Note: The rated primary current is given for one turn of the primary winding.

CC3P current transformers with primary winding

Primary current: 5 to 50A
Secondary current: 5A or 1A

Description

CC3P CTs support primary winding for easy wiring. The mounting base can be rotated anywhere in a 90° range to facilitate installation. A double-mold structure gives CC3P CTs excellent moisture resistance and good insulation properties. Select from a lineup of three types with rated burdens of 5VA, 15VA, and 40VA.

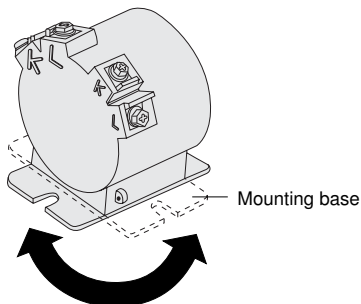


Types and ratings

Burden (VA)	Rated primary current (A)	Secondary current (A)	Accuracy class	Thermal limit current	Max. voltage (kV rms.)	Dielectric strength (kV 1 min.)	Mass (kg)	Type
5	1 2 3 5 7.5 10 15 20 25 30	5 or 1	1.0	40 times rated primary current	1.15kV	4.0kV	0.7	CC3P1-001 <input type="checkbox"/>
	CC3P1-002 <input type="checkbox"/>							
								CC3P1-003 <input type="checkbox"/>
								CC3P1-005 <input type="checkbox"/>
								CC3P1-7P5 <input type="checkbox"/>
								CC3P1-010 <input type="checkbox"/>
								CC3P1-015 <input type="checkbox"/>
								CC3P1-020 <input type="checkbox"/>
								CC3P1-025 <input type="checkbox"/>
								CC3P1-030 <input type="checkbox"/>
	40 50	5 or 1	1.0		1.15kV	4.0kV	1.1	CC3P1-040 <input type="checkbox"/>
								CC3P1-050 <input type="checkbox"/>
15	1 2 3 5 7.5 10 15 20 25 30 40 50	5 or 1	1.0	40 times rated primary current	1.15kV	4.0kV	1.1	CC3P2-001 <input type="checkbox"/>
								CC3P2-002 <input type="checkbox"/>
								CC3P2-003 <input type="checkbox"/>
								CC3P2-005 <input type="checkbox"/>
								CC3P2-7P5 <input type="checkbox"/>
								CC3P2-010 <input type="checkbox"/>
								CC3P2-015 <input type="checkbox"/>
								CC3P2-020 <input type="checkbox"/>
								CC3P2-025 <input type="checkbox"/>
								CC3P2-030 <input type="checkbox"/>
								CC3P2-040 <input type="checkbox"/>
								CC3P2-050 <input type="checkbox"/>
40	1 2 3 5 7.5 10 15 20 30	5 or 1	1.0	40 times rated primary current, 1 second	1.15kV	4.0kV	1.1	CC3P3-001 <input type="checkbox"/>
								CC3P3-002 <input type="checkbox"/>
								CC3P3-003 <input type="checkbox"/>
								CC3P3-005 <input type="checkbox"/>
								CC3P3-7P5 <input type="checkbox"/>
								CC3P3-010 <input type="checkbox"/>
								CC3P3-015 <input type="checkbox"/>
								CC3P3-020 <input type="checkbox"/>
								CC3P3-030 <input type="checkbox"/>
	40 50	5 or 1	1.0		1.15kV	4.0kV	1.2	CC3P3-040 <input type="checkbox"/>
								CC3P3-050 <input type="checkbox"/>


Notes: * Replace the mark by the secondary current code.
5: 5A 1: 1A

■ **Type number nomenclature**

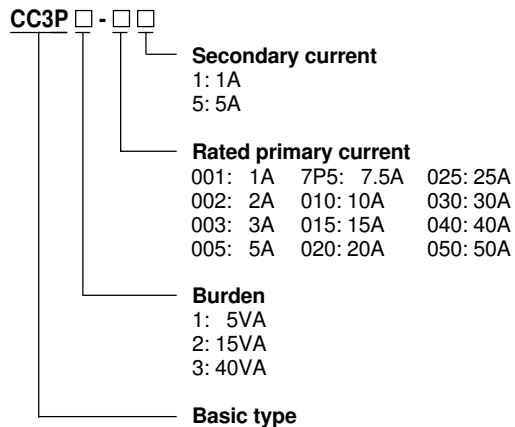


■ **Dimensions, mm**

CC3P1: 1 to 30A

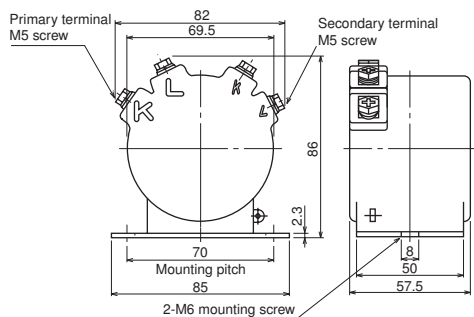

CC3P1: 40, 50A CC3P2, CC3P3

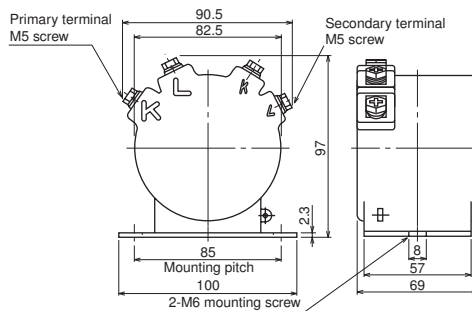


CC3M rectangular hole through-type current transformers

Primary current: 150 to 6000A
Secondary current: 5A

Description

CC3M CTs can be mounted vertically or horizontally by changing the position of the mounting base. Also, the busbar can be mounted directly using a mounting bracket as illustrated, so a busbar mounting angle or holes are not required.

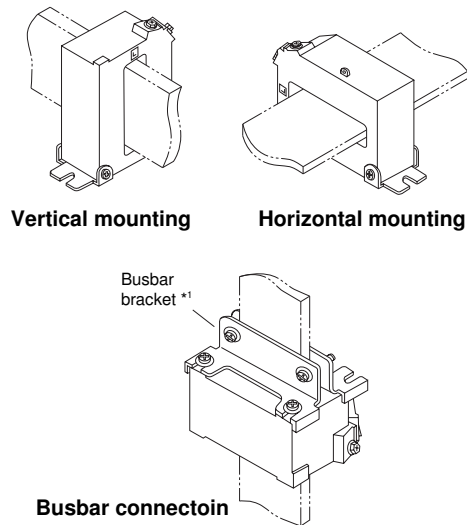


Types and ratings

Burden (VA)	Rated primary current (A)	Secondary current (A)	Accuracy class	Thermal limit current	Max. voltage (kV rms.)	Dielectric strength (kV 1 min.)	Mass (kg)	Type	
5	150	5	1.0	40 times rated primary current	1.15kV	4.0kV	2.1	CC3M1-1505	
	200						1.1	CC3M1-2005 CC3M1-3005	
	300						0.6	CC3M1-4005 CC3M1-5005 CC3M1-6005	
	400								
	500								
600									
15	150	5 or 1	1.0	40 times rated primary current	1.15kV	4.0kV	2.1	CC3M2-150□	
	200	5 or 1	1.0		1.15kV		1.1	CC3M2-200□ CC3M2-250□ CC3M2-300□	
	250	5 or 1	1.0		1.15kV		4.0kV	0.6	CC3M2-400□ CC3M2-500□
	300								
	400							0.5	CC3M2-600□ CC3M2-750□ CC3M2-800□
	500								
	600								
	750	1.2	CC3M2-10X□ CC3M2-12X□ CC3M2-15X□ CC3M2-20X□						
	800								
	1000								
1200									
1500									
2000									
40	200	5 or 1	1.0	40 times rated primary current	1.15kV	4.0kV	2.3	CC3M3-200□ CC3M3-250□	
	250	5 or 1	1.0		1.15kV		4.0kV	1.1	CC3M3-300□ CC3M3-400□ CC3M3-500□
	300								
	400							1.1	CC3M3-600□ CC3M3-750□
	500								
	600								0.9
	750	1.3	CC3M3-10X□						
	800		1.2		CC3M3-12X□				
	1000		1.5		CC3M3-15X□ CC3M3-20X□				
	1200	5	1.0		1.15kV		4.0kV	4.8	CC3M3-25X5 CC3M3-30X5
1500	6.3			CC3M3-40X5					
2000									
2500	5	1.0	1.15kV	4.0kV	14	CC3M3-50X5 CC3M3-60X5			
3000									
4000									
5000*2	5	1.0	1.15kV	4.0kV	14				
6000*2									

Notes: *1 Busbar mounting brackets are sold separately. When ordering, specify the CT type number and rated primary current. If the rated primary current is 1000 to 2000A, also specify the number of busbars required.
*2 Epoxy resin mold is used to isolate rated primary currents of 5000 or 6000A.

- CC3M CTs are mounted vertically at the factory.
- Replace the □ mark by the secondary current code.
5: 5A 1: 1A

■ Type number nomenclature

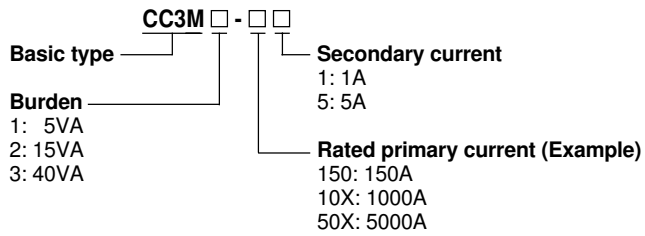

■ Ordering information


Specify the following:

1. Type number
2. Busbar mounting bracket if required.
Primary current


■ Dimensions, mm

● Vertical mounting


CC3M1: 150 to 300A CC3M2: 200 to 300A
CC3M3: 300 to 500A

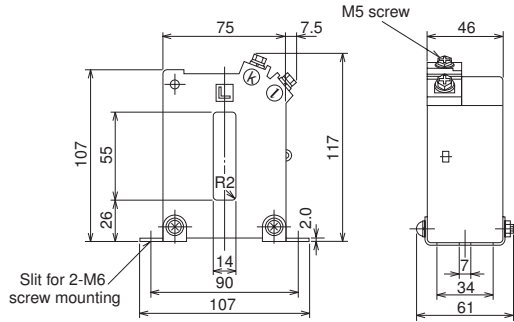


CC3M1: 400 to 600A CC3M2: 400 to 750A

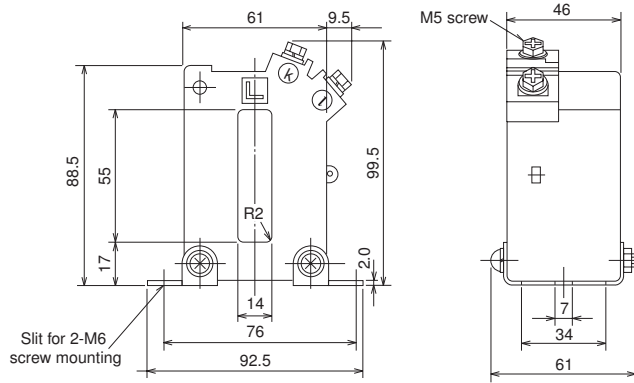

CC3M2: 150A
CC3M3: 200, 250A

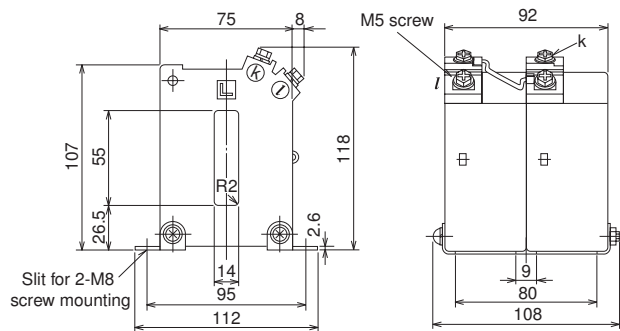


CC3M2: 800A CC3M3: 600 to 800A

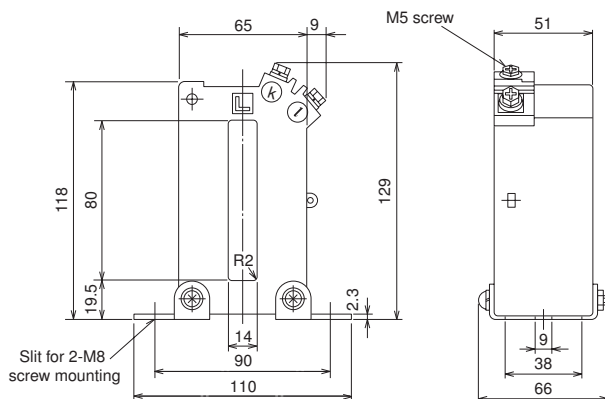


● Horizontal mounting


CC3M1: 150 to 300A CC3M2: 200 to 300A
CC3M3: 300 to 500A

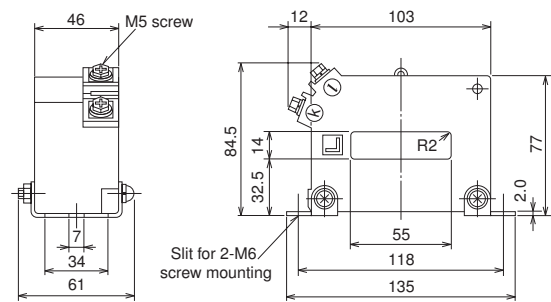


CC3M1: 400 to 600A CC3M2: 400 to 750A

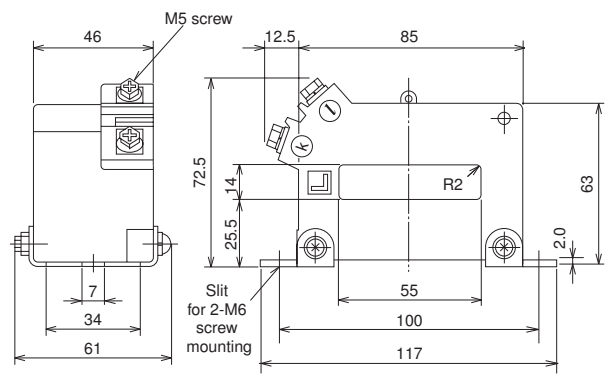

CC3M2: 150A
CC3M3: 200, 250A

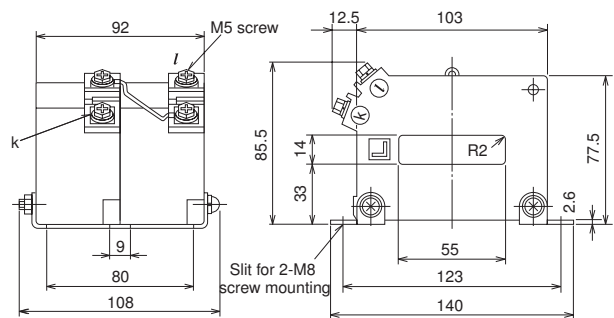


CC3M2: 800A CC3M3: 600 to 800A

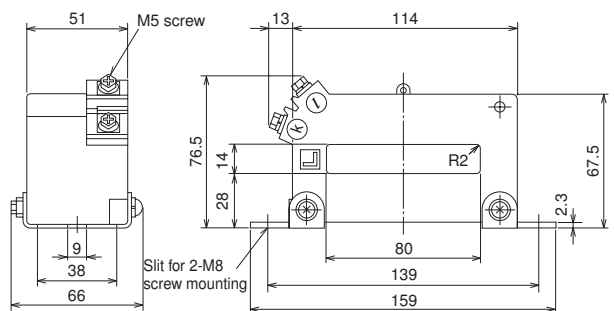


■ Dimensions, mm
● Vertical mounting

CC3M2, CC3M3: 1000 to 2000A

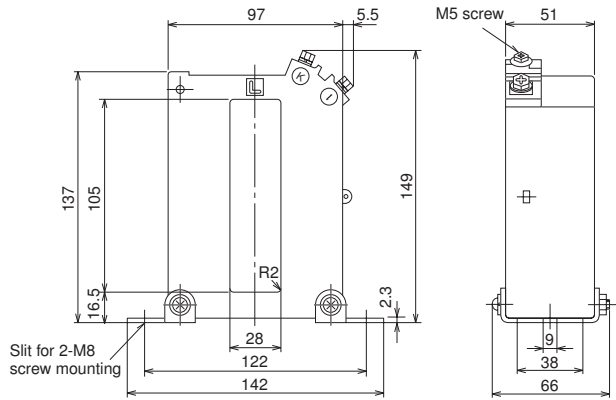


● Horizontal mounting


CC3M2, CC3M3: 1000 to 2000A

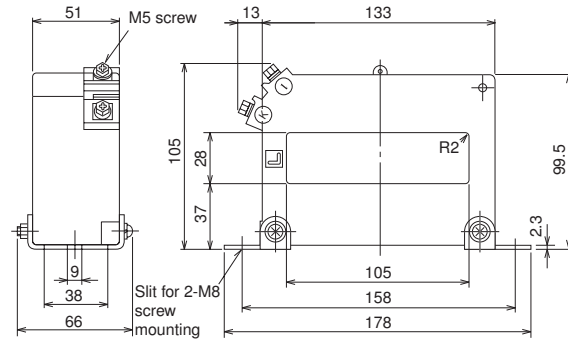


CC3M3: 2500 to 4000A

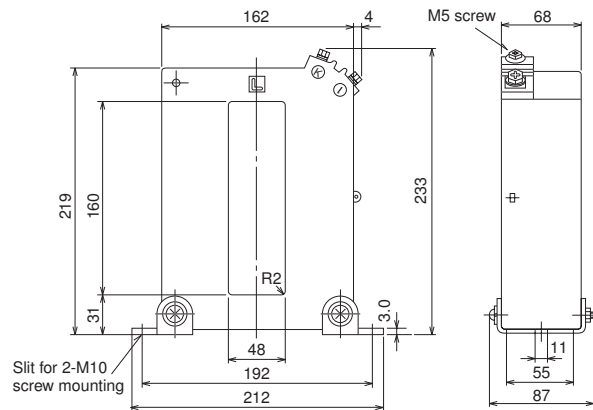


CC3M3: 2500 to 4000A

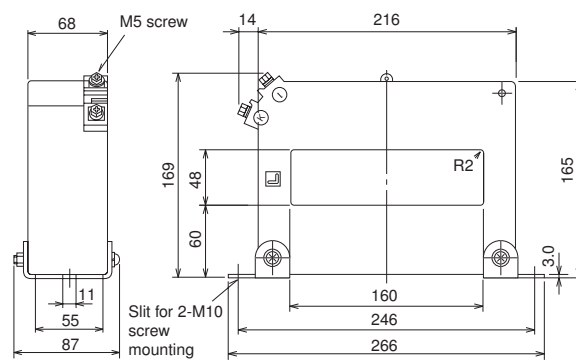

CC3M3: 5000, 6000A

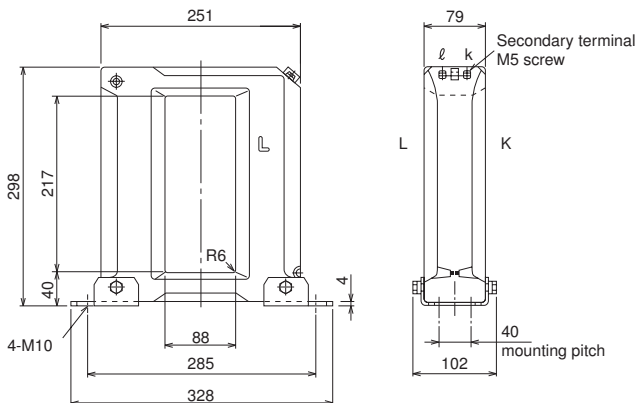

CC3M3: 5000, 6000A

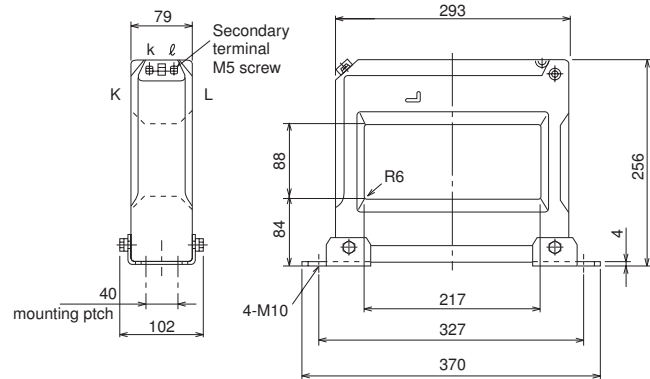

■ Dimensions, mm


Direct busbar mounting

CC3M2 CTs with a rated primary current of 150A or CC3M3 CTs with a rated primary current of 200A, 250A or 4000 to 6000A cannot be mounted directly to a busbar because the CT is too heavy for the cross section of the busbar.

The busbar must be located in the center of the through hole of the CT. Be sure that the busbar does not come into contact with the wall of the through hole.

● Single busbar mounting


CC3M1: 150 to 600A CC3M2: 200 to 2000A CC3M3: 300 to 2000A

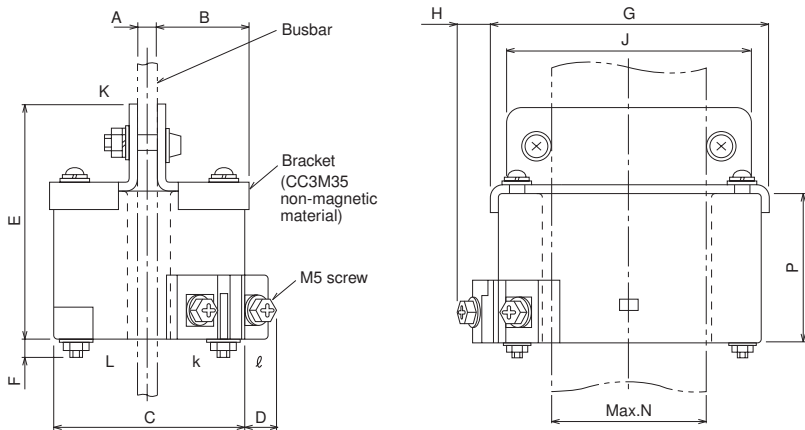

Type	Primary current (A)	Bracket type	A	B	C	D	E	F	G	H	J	N	P
CC3M1	150 to 300	CC3M33	5 to 10	33.5	75	7.5	74	6.5	110	8.5	90	50	46
	400 to 600	CC3M22	5 to 10	26.5	61	9.5	73.5	7	90.5	9.5	81	50	46
CC3M2	200 to 300	CC3M33	5 to 10	33.5	75	7.5	74	6.5	110	8.5	90	50	46
	400 to 750	CC3M22	5 to 10	26.5	61	9.5	73.5	7	90.5	9.5	81	50	46
	800	CC3M34	5 to 10	27.5	65	9	79	6.5	121	9	107	75	51
	1000 to 2000	CC3M35	6 to 12	43.5	97	5.5	80.5	7	139	10	129	100	51
CC3M3	300 to 500	CC3M33	5 to 10	33.5	75	7.5	74	6.5	110	8.5	90	50	46
	600 to 800	CC3M34	5 to 10	27.5	65	9	79	6.5	121	9	107	75	51
	1000 to 2000	CC3M35	6 to 12	43.5	97	5.5	80.5	7	139	10	129	100	51

● Two-busbar mounting

CC3M2, CC3M3: 1000 to 3000A

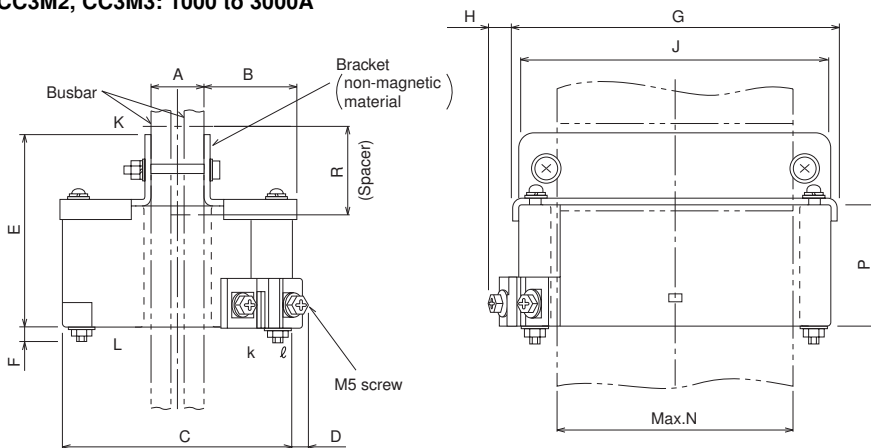

Primary current (A)	Bracket type	A	B	C	D	E	F	G	H	J	N	P	R
1000, 1200, 1500, 2000	CC3M36	15 to 24	39	97	5.5	80.5	7	139	10	129	100	51	Approx. 40
2500, 3000	CC3M37	15 to 45	72	162	4	102	17	223	11	210	150	68	Approx. 60

Instrument Transformers

Split type CT/CC2




MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

Split type current transformers, CC2

Primary current: 5 to 1200A
Secondary current: 7.34mA to 1A

■ Description

The CC2D and CC2C are split-type current transformers. The CT can be mounted to existing panels, such as control centers or load centers, to measure or monitor wattage. These CTs can be mounted without removing existing cables for easier installation. Five rated burdens are available: 0.26mVA, 44.4mVA, 0.18VA, 0.5VA

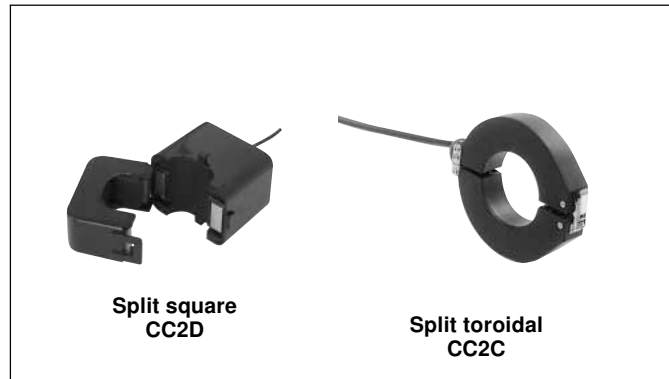

■ Types and ratings

Description	Burden	Rated primary current (A)	Secondary current	Dia. of hole (mm)	Overcurrent resistance (A)	Connection	Mass (g)	Type
Split square	0.2693mVA Load resistance 5Ω	5	7.34mA	10	40 In/1.0s	Heat-resistant IV cable AWG22 1000mm supplied	45	CC2D81-0057
	26.93mVA Load resistance 5Ω	50	73.4mA	10	10 In/1.0s		45	CC2D81-0506
	44.4mVA Load resistance 10Ω	200	66.67mA	24	40 In/1.0s	Heat-resistant IV cable AWG18 1000mm supplied	200	CC2D65-2008
	0.18VA Load resistance 10Ω	400	133.33mA	36			300	CC2D54-4009
Split toroidal	0.5VA Load resistance 5Ω	100	1A	36			300	CC2D74-1001 CC2D74-2001 CC2D74-4001
		200		60			500	CC2C76-8001 CC2C76-12X1
		400						
		800						
		1200						


■ Performance

Application	Type	Ratio error	Phase difference	Insulation resistance	Dielectric strength	Output protection
For F-MPC	CC2D81-0057	±1% In	150' ±90' /In	100MΩ (500V DC megger)	2000V AC/1min, between sensor core and output	Not provided
	CC2D81-0506	±1.5%/0.2 In	180' ±120' /0.2 In			
	CC2D65-2008	±1% In	±60' /In	100MΩ (500V DC megger)	2000V AC/1min, between sensor core and output	Provided, built-in clamping diode ±3Vp
	CC2D54-4009	±1.5%/0.2 In	±90' /0.2 In			
General purpose	CC2D74-1001	±1% In	±80' /In	100MΩ (500V DC megger)	2000V AC/1min, between sensor core and output	Provided, built-in clamping diode ±1.4Vp
	CC2D74-2001	±1.5%/0.2 In				
	CC2D74-4001	±1% In				
	CC2C76-8001 CC2C76-12X1	±1.5%/0.2 In	±80' /In	100MΩ (500V DC megger)	2000V AC/1min, between sensor core and output	Provided, built-in clamping diode ±1.4Vp


■ Dimensions, mm

• Split-toroidal


CC2D81

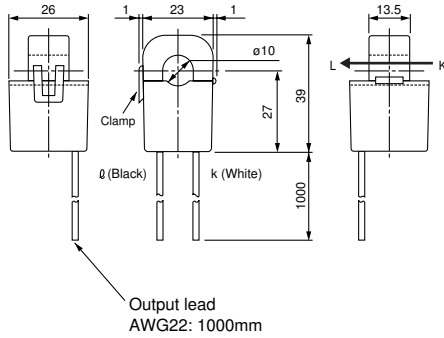


CC2D65

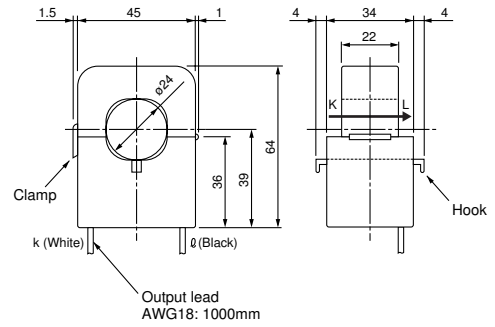

CC2D54, 74

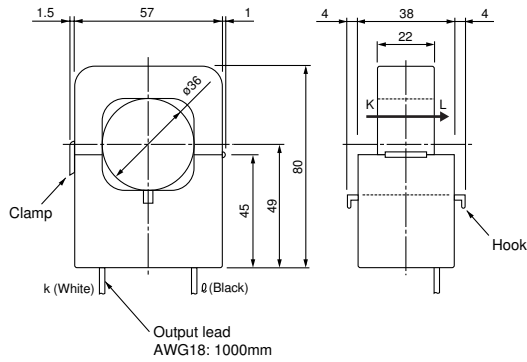

CC2C76

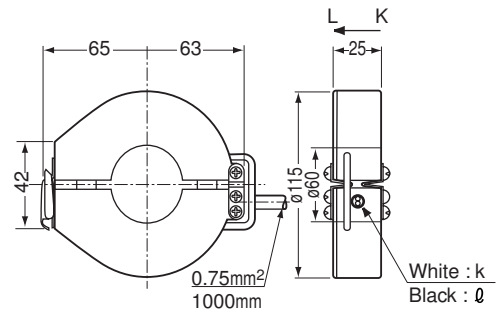

■ Ordering information

Specify the following:


1. Type number

CD32 and CD34 potential transformers

Primary: 220V, 440V
Secondary: 110V

Description

The CD32 and CD34 transformers are of double-mold structure that provide excellent characteristics, such as thermal resistance and moisture resistance. VTs with a fuse of a 100kA interrupting capacity have been added to the series. The accuracy class of a type with a rated burden of 15VA is 1.0, 1P and that of a type with a rated burden of 50VA is 3.0, 3P. A transparent insulation cover is available for the terminal and fuse mounting blocks.

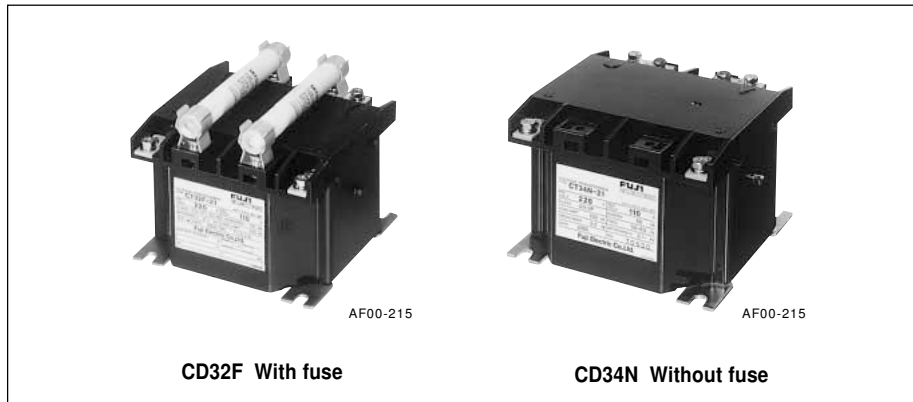

Types and ratings

Burden (VA)	Primary voltage (V)	Secondary voltage (V)	Accuracy class	Dielectric strength	Fuse*		Applicable load (VA, Max.)	Mass (kg)	Type
					Type	Rating			
15	220, 50/60Hz 440, 50/60Hz	110 110	1.0 · 1P	2000V, 1 minute 3000V, 1 minute	CD3F	600V, 2A(T) IC: 100kA	100	3.5	CD32F-21 CD32F-41
	220, 50/60Hz 440, 50/60Hz	110 110	1.0 · 1P	2000V, 1 minute 3000V, 1 minute	Not provided		100	3.5	CD32N-21 CD32N-41
50	220, 50/60Hz 440, 50/60Hz	110 110	3.0 · 3P	2000V, 1 minute 3000V, 1 minute	CD3F	600V, 2A(T) IC: 100kA	100	3.5	CD34F-21 CD34F-41
	220, 50/60Hz 440, 50/60Hz	110 110	3.0 · 3P	2000V, 1 minute 3000V, 1 minute	Not provided		100	3.5	CD34N-21 CD34N-41


Notes: T: Fuse for transformer protection. IC: Interrupting capacity
* When the load limit is 100VA, the maximum tolerance is 5% or less.

Characteristics

Type		CD32F, 34F
Primary voltage (V)		220, 440
Applicable load (VA, max.)	Continuous rating	100
	2-second rating (For transformer protection)	200
Error at max. applicable load (%)	Continuous rating	-5
	2-second rating (For transformer protection)	-10
Fuse	Rated current (A)	T2
	Interrupting capacity (kA)	100
% impedance voltage	% resistance voltage (%)	0.69
	% reactance voltage (%)	0.15
	% impedance voltage (%)	0.71

Note: The 2-second rating is the value provided considering a 10-cycle duty on condition that the current is provided for 0.2s at 1.8s intervals.

Type number nomenclature

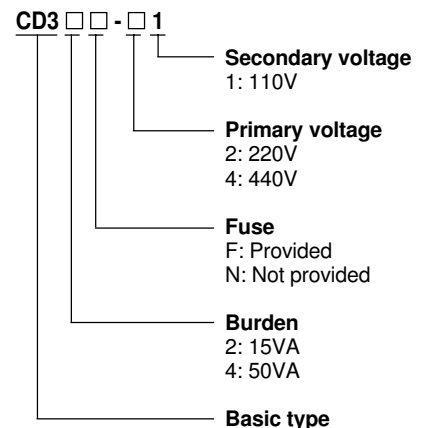


Ordering information


Specify the following:
1. Type number

■ Dimensions, mm


CD32F, CD34F

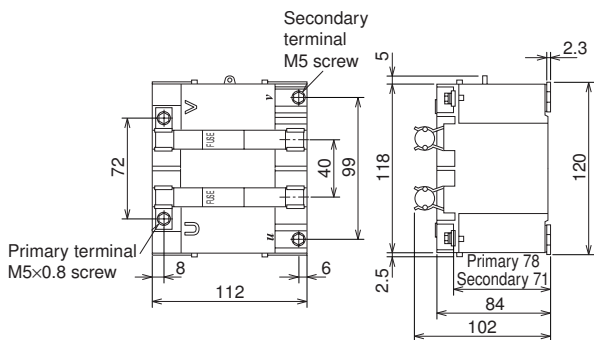


Panel drilling




With insulation cover

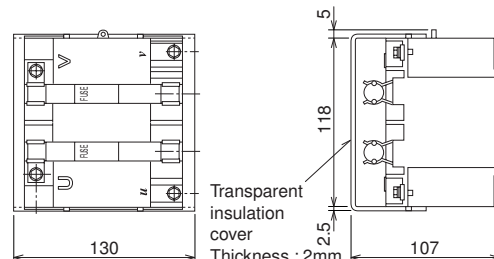


CD32N, CD34N

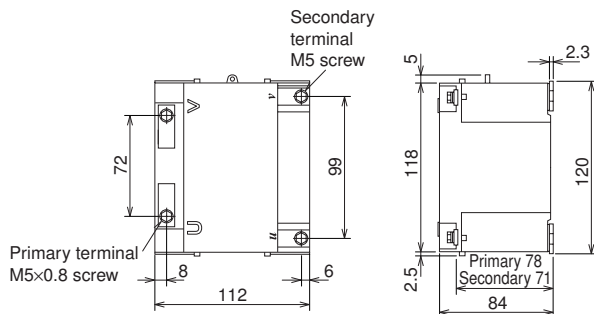

Panel drilling



With insulation cover

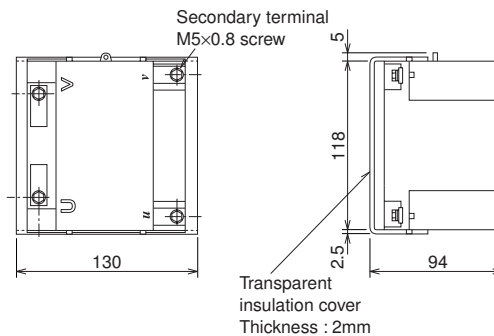


■ Optional accessories

• Insulation cover

Type: CD3C

Applicable VT: CD32, 34

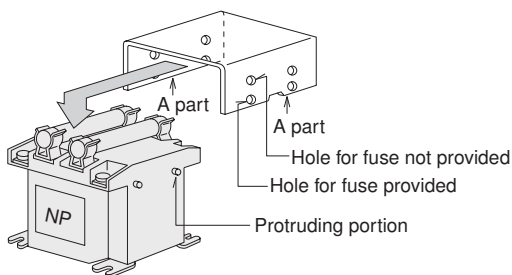

Mounting insulation cover

Slightly open the A-part of the insulation cover outward. Mount the cover to the VT so that the protruding portions of the VT are inserted into the holes of the insulation cover.


• Insulation caps for low-voltage current transformer

Type: SB-4064-23


Applicable CT: CC3L, CC3P and CC2N

Insulation caps can be mounted without removing the crimp terminals on the CT. The terminals are completely covered with the insulation caps so that no live part is exposed. These caps are translucent so that the terminal connections can be checked externally.

Dimensions, mm



AF00-170

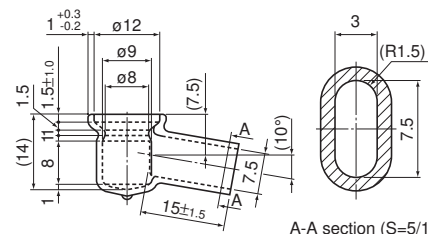

A-A section (S=5/1)

Automatic power factor regulator QC06E, QC12E

■ Description

Automatic power factor regulator (APFR) is a device which is designed to maintain the target power factor by regulating lagging or leading current. The APFR is designed to monitor the reactive power within the circuit continuously and to provide ON/OFF signals automatically to control circuit breakers in a capacitor bank. In an electrical network such as an industrial plant using induction motors which produce reactive power, the power factor will drop. This will cause a power loss, a line voltage drop and other disadvantages. In conventional electrical systems the efficiency of transmission and distribution equipment is improved by installing fixed capacitors across the line. However, an over-compensation may arise when there is a light load, such as at night, which would result in an increase in line voltage and excess current. The APFR supervises the power factor in the system, and controls the power factors by switching capacitors ON or OFF as the situation requires in the face of a reactive leading or lagging load.

Low power loss

Correcting the power factor with a power capacitor reduces the line current. This also reduces the power loss caused by the resistances of the power cables and transformer windings.

Effective use of power receiving facility

Correcting the power factor with a power capacitor reduces the line current. Since this produces margins in the transformer capacity and the current-carrying capacity of cables, a heavier load can be carried without adding more facilities.

Stable supply voltage for long equipment service life

A reactive power, especially a leading reactive power at a light load (at night), often produces an overvoltage and shortens the service life of lamps. Use an automatic power factor regulator to suppress a voltage decrease at a heavy load and a voltage increase at a light load.

Laborsaving unmanned operations

This regulator outputs capacitor connection and disconnection commands automatically to maintain an optimum power factor. The simple setup for this output saves labor applied to power factor correction.

■ Features

• Compact (DIN size) and lightweight

The DIN-size compact unit permits easy mounting hole on the panel and enhances work efficiency.

The 6-bank and 12-bank models have front panels of the same size (144mm × 144mm). Since in the panel cutout hole sizes are also the same (138mm × 138mm), it is possible to use panel cutout holes of one uniform size.



• 220V and 440V power supplies

The regulator can be connected to a 220V or 440V power supply. Set the voltage input switch on the front panel to the control power supply voltage being used. Connect control power cables to the correct terminals of the terminal block in accordance with the control power supply voltage being used.

• Automatic setting of control level by microcomputer

The mode and data are set simply by using four keys. The microcomputer automatically sets the levels at which capacitors should be connected or disconnected.

• Three types of capacitor connection and disconnection control by purpose

1. Cyclic control or optimum control (automatic selection)

Under cyclic control, capacitors of the same capacitance are connected and disconnected in ascending order of capacitor number.

Under optimum control to keep the number of connections and disconnections minimal, a capacitance change is calculated from the measured reactive power and the target power factor and a capacitor of the nearest capacitance is connected or disconnected.

Either control is selected in accordance with the set capacitor capacitance.

2. Unconditional cyclic control

Capacitors are controlled cyclically, irrespective of their capacitances.

3. Multistep control

Capacitors having capacitances incremented in multiples of two (e.g. 1:2:2:2:2:2:, 1:2:4:4:4:4:, and 1:2:4:8:8:8) are simultaneously connected or disconnected to optimize the capacitance with a minimal number of steps.

• Useful functions

1. Polarity error diagnosis function

If a polarity error in wiring is detected, the regulator lights the alarm lamp and sounds the buzzer to indicate the miswiring.

2. Forced disconnection function


To protect capacitors from being damaged or reactors from being burnt by excessive harmonics, or to disconnect capacitors unconditionally at night, external time switch signals can be input to the regulator. The signals automatically disconnect the connected capacitors in proper order.

• Automatic capacitor disconnection at light load

When the load of a power line decreases at night, the connected capacitors may increase the leading reactive power and cause an overvoltage.

A voltage increase on the power receiving side will shorten the service life of lamps and other load equipment.

To prevent an excessive leading power factor at a light load, the regulator automatically disconnects capacitors.

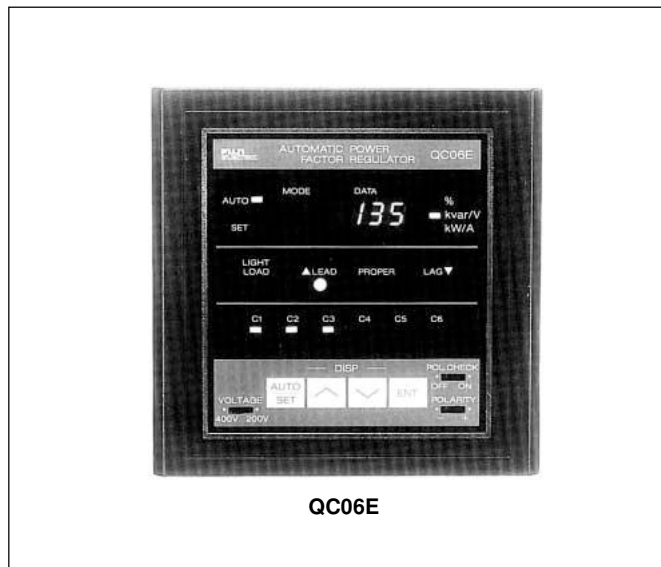

QC06E

• Abundant regulator status information display

Power factor



Reactive power



Active power



Voltage



Current



Power Factor Controllers
Automatic power factor regulators
QC06E and QC12E




MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

■ Specifications

Item		Specification	
		QC06E	QC12E
Voltage input	Frequency	50/60Hz	
	Rated voltage	200 – 220V/400 – 440V selectable	
	Allowable voltage fluctuation range	170 – 264V at 220V 323 – 528V at 440V	
	Power consumption	13VA at 220V, 13VA at 440V	15VA at 220V, 15VA at 440V
Current input	Frequency	50/60Hz	
	Rated current	5A	
	Power consumption	1VA	
Reactive power control range	Connection control level (kvar)	Automatic setting in accordance with the target power factor	
	Disconnection control level (kvar)	Already-connected minimum capacitor capacitance × 1.2 – connection control level (When the calculation result becomes negative, the disconnection control level is automatically set to 0).	
	Correct control range (kvar)	Already-connected minimum capacitor capacitance × 1.2 (Automatic setting)	
	Control error	±0.05 (kvar) × CT ratio (at 220V input)	
Light-load disconnection control value	When the active power level falls below the numeric-input minimum load, the capacitor are disconnected successively from the capacitor banks in descending order of capacitance at disconnecting time intervals. When the minimum load is set to 0, however, no capacitors are disconnected even when the active power level falls below the numeric-input minimum load. [Control error: ±0.05 (kvar) × CT ratio] (at 220V input)		
Capacitor control output	No. of connectable banks	6-circuit (NO contact common on one side)	12-circuit (NO contact common on one side)
	Applicable minimum load	1V DC, 1mA	
	On/Off switching capacity	250V AC, 5A 30V DC, 5A 100V DC, 0.5A	
	Electrical life expectancy	Approx. 100.000 operations at 220V AC, 2A inductive load	
Output control system	A1: Cyclic/optimum control, selectable automatically A2: Unconditional cyclic control A3: Multistep control, 1:2:2:2:2:2----- A4: Multistep control, 1:2:4:4:4:4----- A5: Multistep control, 1:2:4:8:8:8----- (Control modes A3 to A5 are effective for C1 only 0 to 9999)		
Setting item	1. Bank capacitor capacitance C1 to C6 (0kvar *) (Modes 1 to 6) Output control system A3 to A5 are available only for bank C1.	Bank capacitor capacitance C1 to C12 (0kvar *) (Modes 1 to 9, o, b, c) Output control system A3 to A5 are available only for bank C1.	
	2. Target power factor $\cos\theta = 98\%^*$	Mode F (85 to 100)	
	3. CT ratio	0* Mode C (1 to 1200)	
	4. Control mode	1* Mode A (1 to 5)	
	5. Minimum load	0kW* Mode L (0 to 9999)	
	6. Delay time	300 sec.* Mode d (30, 60, 120, 300, 600)	
Display	Digital display	Current power factor (%), reactive power (kvar) (no mode symbol: leading, -: lagging), active power (kW), primary voltage (V) and primary current (A) on 7-segment LED panel.	
	Display error: 0.5A or less at CT input Power factor lead (+60%) to lag (-60%)	Power factor: ±5% or less, Reactive/active power: ±0.05kvar/kW × CT ratio or less (at 220V input) Primary current: ±0.1A × CT ratio or less	
	Control status display (LED)	Light load: Active power equal to or lower than the light-load disconnection control level Lagging, leading, optimum: Reactive power lagging, leading, or optimum in the control range	
	Control output display (LED)	Lit: Control output ON, Unlit: Control output OFF	
Operating ambient temperature	-10 to +55°C		
Dielectric strength	2500V AC 1 minute (between all terminals and E terminal)		
Outline dimensions (mm)	Height: 144, Width: 144, Depth: 114.5	Height: 144, Width: 144, Depth: 140	
Mass (kg)	Approx. 1.5	Approx. 1.8	

Note: * Value at shipment

■ Display and setting part

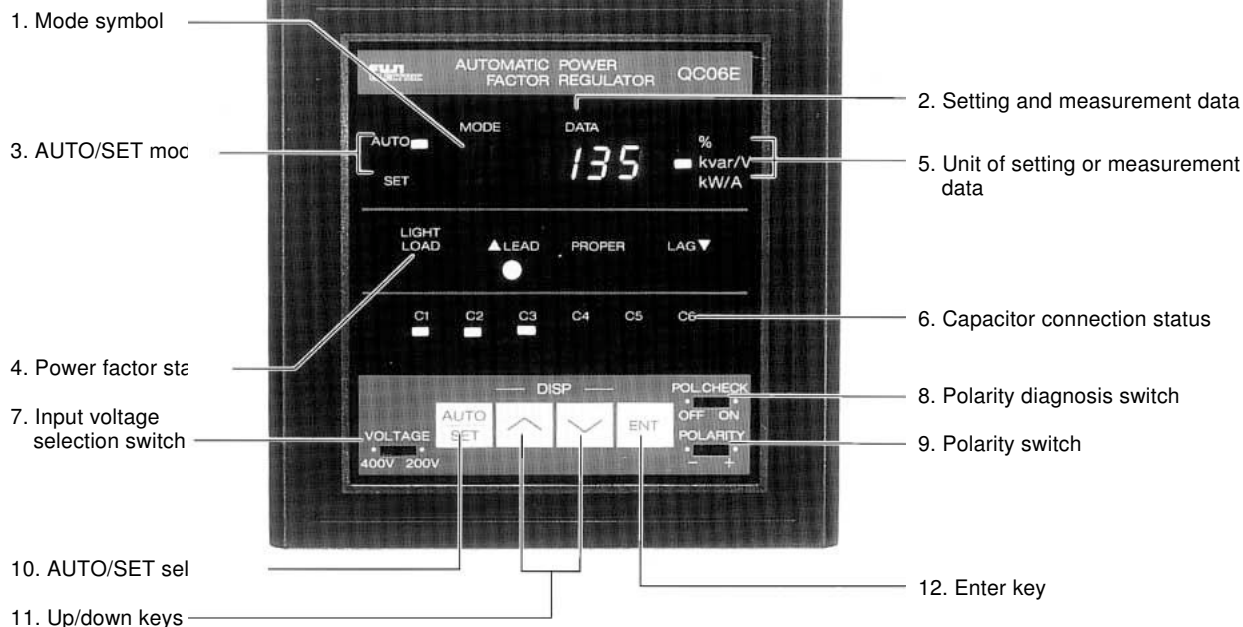

1. Mode symbol

Displays the set mode (mode symbol) or the kind of measurement data.

2. Setting and measurement data

• Data setting mode

The digital LED display displays the following setting data:

Mode symbol	Setting item	Setting data	Setup at shipment
1 to 9	Capacitance of capacitor C1 to C9 *6	0 to 9999kvar *1	0
o, b, c	Capacitance of capacitor C10, C11, C12 *6	0 to 9999kvar *1	0
A	Capacitor control system	1 to 5 *2	1
C	CT ratio	1 to 1200 *3	0
F	Target power factor	85 to 100%	98
L	Disconnection at light load	0 to 9999kW *4	0
d	Delay time	30, 60, 120, 300, or 600s *5	300

Notes:

*1 When the capacitance is set to 0 or 9999, the control output contact goes ON for 0 or OFF for 9999 during automatic operation.

*2 See the table at right for the meanings of the capacitor control system numbers.

*3 The CT ratio is set to 0 when the regulator is shipped from the factory. Set this value to accommodate the use requirements. The regulator does not operate automatically when the set value is 0 or 1201 or greater.

*4 When the set value is 0, the light-load disconnection function is not activated. To disconnect capacitors when the load becomes light, set the minimum capacitor capacitance.

*5 Select an optimum delay time for the capacitor discharging unit. (Set "300" or "600" if a discharging resistor is used.)

*6 The mode symbols are 1 to 6 (C1 to C6) for type QC06E and 1 to 9, o, b, and c (C1 to C12) for type QC12E.

• Auto operation mode

When the Up (▲) and Down (▼) keys are pressed at the same time, the LED display displays measurement data in the following order:

Model symbol	Display item	Measurement data display
(-) *7	Power factor	-0 to 100 to 0%
(-) *7	Reactive power	-9999 to 0 to 9999kvar *8
A	Active power	0 to 9999kW *8
U	Primary voltage	0 to 9999V *8
I	Primary current	0 to 6000 (5X1200)A
	No display	—

Notes:

*7 No mode symbol is displayed for a lead; a negative sign (-) is displayed for a lag.

*8 The LED display always displays "9999" for any value greater than 9999.

Capacitor control system

Set value	Description
1	Cyclic/optimum control
2	Unconditional cyclic control
3	Multistep control (capacitance ratio: 1:2:2:2:2:2:2:2:2)
4	Multistep control (capacitance ratio: 1:2:4:4:4:4:4:4:4)
5	Multistep control (capacitance ratio: 1:2:4:8:8:8:8:8:8)

3. AUTO/SET mode

The green lamp lights in the auto operation mode and the red one in the data setting mode.

4. Power factor status

Light load: The yellow lamp lights when the active power of the circuit is equal to or lower than the set level for light-load disconnection.

△ Lead:

The red lamp lights when the reactive power of the circuit is leading, compared to the set level for disconnection.

Acceptable:

The green lamp lights when the reactive power of the circuit is within the optimum control range.

Lag ▽ :

The red lamp lights when the reactive power of the circuit is lagging, compared to the set level for connection.

5. Unit of setting or measurement data

A green lamp lights at %, kvar, kW, V, or A.

6. Capacitor connection status

The red lamps light at the capacitors for which the capacitor control output contacts are ON (make) and go out at the capacitors for which the contacts are OFF (break).

7. Input voltage selection switch

Set this switch to "200V" for 200/220V input power or "400" for 400/440V input power.

8. Polarity diagnosis switch

The polarity switch must initially be toggled to "+". Toggle the polarity diagnosis switch to the right to check the voltage or current input polarity. If the polarity is incorrect, "E□□□3" is displayed and the buzzer sounds.

9. Polarity switch

If the voltage or current input polarity is incorrect, toggle this switch to "-" and press the enter key to clear the error display and stop the buzzer. The regulator then operates normally because the input polarity is handled as being reversed.

10. AUTO/SET select key

Press this key to select the auto operation or data setting mode.





11. Up/down keys

Use these keys to select a data setting mode. Use these keys to increment (+1) or decrement (-1) a numeric value in each setting mode.

12. Enter key

After selecting a data setting mode, start numeric input. The numeric display changes from being continuously lit to blinking.

Press this key to confirm a set value in each data setting mode. The value is stored in the internal memory and the numeric display changes from blinking to being continuously lit.

Press two keys of the four keys, (   and ), at the same time for the following operation or display:

● **Data setting mode**



Clears the set value to 0. (This key operation is effective only when the mode symbol is 1 to 9, o, b, c, C, or L and the numeric display is blinking.)



Resets the set value to the shipping setup. (This key operation is effective only when the mode symbol is 1 to 9, o, b, c, C, or L and the numeric display is blinking.) (Keep the keys depressed for five seconds or longer.)


● **Auto operation mode**



Changes the measurement data display. (Each time the keys are pressed, the display changes in the following order: power factor, reactive power, active power, primary voltage, primary current, and no display. The initial display at power-on is always power factor data.




Tests a capacitor connection. (Press the keys at the same time for reactive power lag display. Keep the keys depressed to connect the capacitors in the specified order.)



Tests a capacitor disconnection. (Press the keys at the same time for reactive power lead display. Keep the keys depressed to disconnect the capacitors in the specified order.)

■ **Type number nomenclature and ordering code**

JD006 – E

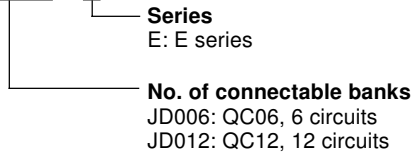

■ **Ordering information**

- Specify the following:
1. Type number or ordering code
 2. Input voltage and current
 3. Operating voltage
 4. Number of connectable capacitor banks

■ Operation of automatic power factor regulator

• **Cyclic control**

Under cyclic control/optimum control, the regulator connects and disconnects capacitors of the same capacitance cyclically. Under unconditional cyclic control, the regulator connects and disconnects capacitors of different capacitances cyclically, irrespective of the set capacitance.

1. Capacitor connection

When the reactive power exceeds the level at which more capacitors should be connected, the red lag lamp lights. If the red lamp remains lit for the set delay time or longer, the corresponding capacitor control output goes ON and the red lamp for the capacitor bank lights.



When the reactive power of the circuit is still over the connection control level and the red lag lamp remains lit, the capacitor control output for the next capacitor goes ON after the delay time. The capacitor control outputs go ON one by one at the delay time intervals until the reactive power level of the circuit falls within the allowable range.

2. Capacitor disconnection

The red lead lamp lights when the circuit load decreases and the connected capacitors increase the leading reactive power of the circuit beyond the level at which a capacitor should be disconnected. When the red lead lamp remains lit for the set delay time or longer, the corresponding capacitor control output goes OFF and the red lamp for the capacitor bank goes OFF.

The capacitors are disconnected in the order of their connection.

The capacitor control output for each capacitor is turned OFF at every delay time interval until the reactive power level falls within the allowable range.

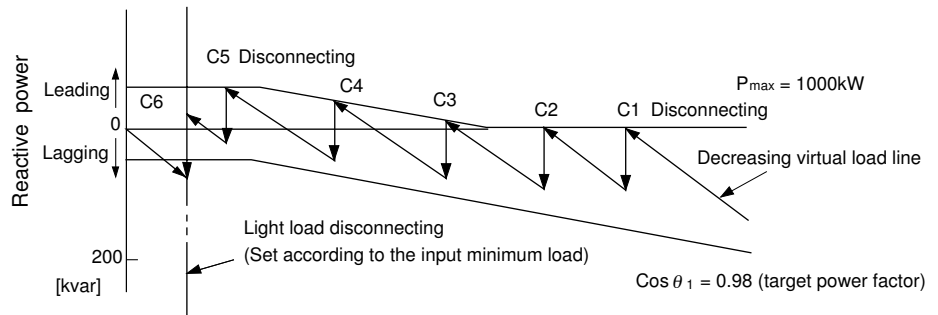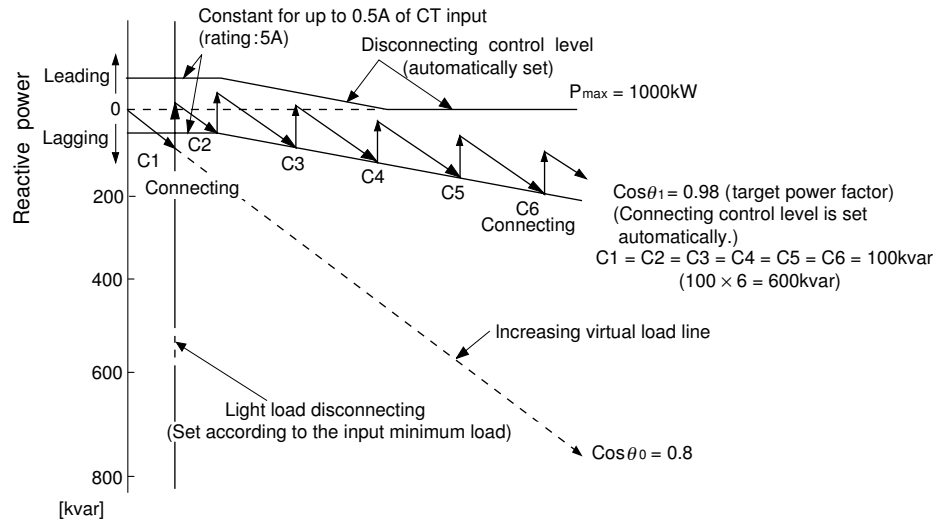

Output operation by the connecting or disconnecting control signals for capacitors

Leading Δ																			
Acceptable	○																		
Lagging ∇																			
C1																			
C2																			
C3																			
C4																			
C5																			
C6																			

○ : Shows that indicators are lit.

• **Optimum control**

Under optimum control, the regulator connects or disconnects the capacitor with the capacitance closest to the change of reactive power among capacitors of different capacitances. If there are two or more capacitors of the same capacitance, the regulator connects or disconnects the capacitors cyclically for optimum control (the number of switchings) match.

1. Capacitor connection

The red lag lamp lights when the reactive power level exceeds the level at which more capacitors should be connected. The regulator calculates the difference between the current reactive power and the level at which more capacitors should be connected, and integrates the calculated value for the set delay time. The average value per unit time is calculated from the integrated total and a capacitor having the capacitance closest to the average value is selected. The capacitor control output for the capacitor is turned ON and the red lamp of the capacitor bank lights.

The regulator continues integrating and averaging the differences between the current reactive power level and the level at which more capacitors should be connected, and selecting optimum capacitors. The capacitor control output is turned ON repeatedly until the reactive power of the circuit falls within the allowable range.

Figure 1 shows an example of a capacitor connection control with a load variation pattern.

2. Capacitor disconnection

When the circuit load decreases, the already-connected capacitors increase the leading reactive power level. If the reactive power level exceeds the level at which capacitors should be disconnected, the red lead lamp lights. The regulator calculates the difference between the current reactive power level and the level at which capacitors should be disconnected, and integrates the calculated value for the set delay time. The average value per unit time is calculated from the integrated total and a capacitor having the capacitance closest to the average value is selected. The capacitor control output for the capacitor is turned OFF and the red lamp of the capacitor bank goes OFF.

The regulator continues integrating and averaging the differences between the current reactive power level and the level at which capacitors should be disconnected, and selecting optimum capacitors. The capacitor control

output is turned OFF repeatedly until the reactive power level of the circuit falls within the allowable range. Figure 2 shows an example of capacitor disconnection control with a load variation pattern.

Fig. 1


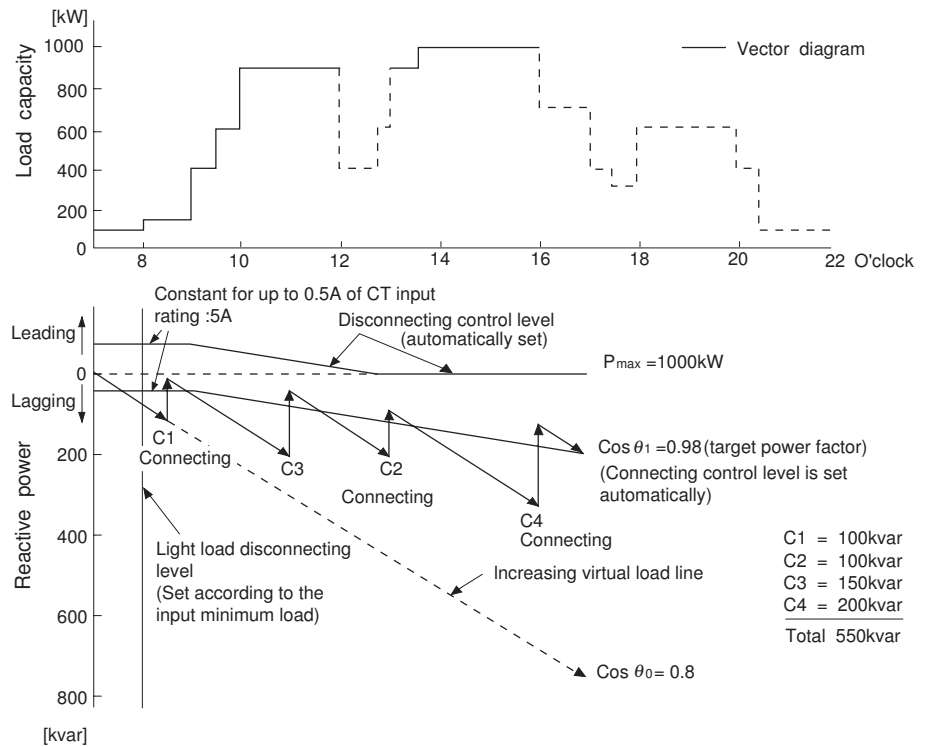


Fig. 2

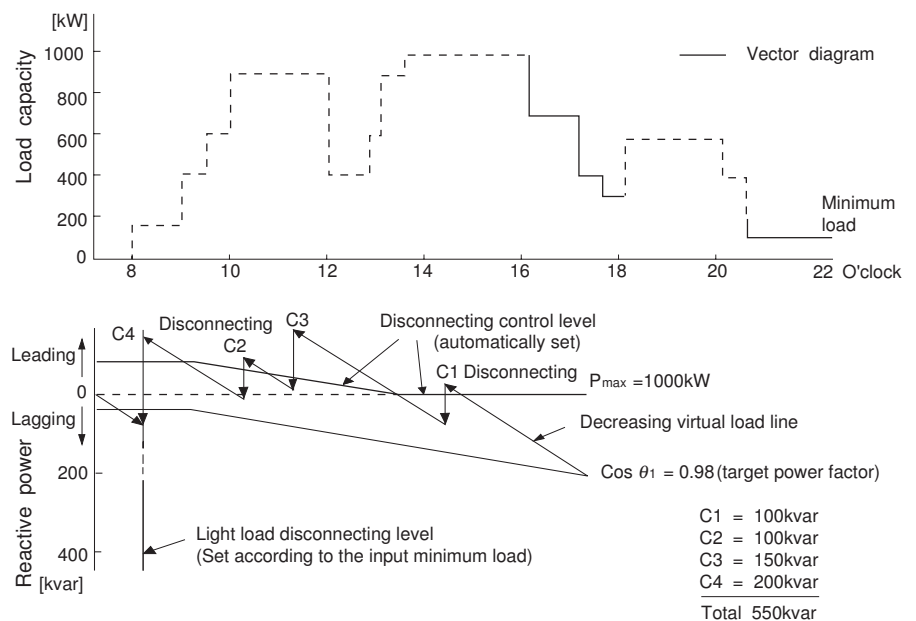

• **Multistep control (step-by-step control)**

Under multistep control, the regulator connects or disconnects in units of the minimum capacitance set at C1 in accordance with the changes of the reactive power to approximate the power factor to the target value. The power factor at a light load can be controlled in the same way.

1. Capacitor connection

When the reactive power level exceeds the level at which more capacitors should be connected, the red lag lamp lights. If the red lamp remains lit for the set delay time or longer, the capacitor control outputs for the next step go ON or OFF and the red lamps of the capacitors light or go OFF. If the reactive power level of the circuit is still over the level at which more capacitors should be connected and the red lag lamp remains lit, the capacitor control outputs for the next capacitor go ON or OFF after the set delay time.

The capacitor control output is turned ON or OFF sequentially at the delay time intervals until the reactive power level of the circuit falls within the allowable range.

2. Capacitor disconnection

The red lead lamp lights when the load decreases and the connected capacitors increase the leading reactive power level of the circuit beyond the level at which capacitors should be disconnected. When the red lamp remains lit for the set delay time or longer, the capacitor control outputs for the next step go OFF or ON and the red lamps of the capacitor banks go OFF or light. The capacitor control output is turned OFF or ON sequentially at the delay time intervals until the reactive power level of the circuit falls within the allowable range.

**Capacitor connection and disconnection signal output operation
Signal output in multistep control mode/QC06E**

Example 1

Lag/Lead	Step	C1=10kvar C2=20kvar C3=20kvar C4=20kvar C5=20kvar C6=20kvar Control system [3] Capacitance ratio C1:C2:C3:C4:C5:C6=1:2:2:2:2:2						Lag/Lead	C1=10kvar C2=20kvar C3=20kvar C4=20kvar C5=20kvar C6=20kvar Control system [3] Capacitance ratio C1:C2:C3:C4:C5:C6=1:2:2:2:2:2							
		C1	C2	C3	C4	C5	C6		Total capacitance	C1	C2	C3	C4	C5	C6	Total capacitance
Lag ▽	1	○						10kvar	Lead △	○	○	○	○	○	○	110kvar
	2		○					20		○	○	○	○	○	○	100
	3	○	○					30		○		○	○	○	○	90
	4		○	○				40				○	○	○	○	80
	5	○	○	○				50		○			○	○	○	70
	6		○	○	○			60					○	○	○	60
	7	○	○	○	○			70		○				○	○	50
	8		○	○	○	○		80						○	○	40
	9	○	○	○	○	○		90		○					○	30
	10		○	○	○	○	○	100							○	20
	11	○	○	○	○	○	○	110		○						○

Example 2

Lag/Lead	Step	C1=10kvar C2=20kvar C3=40kvar C4=40kvar C5=40kvar C6=40kvar Control system [4] Capacitance ratio C1:C2:C3:C4:C5:C6=1:2:4:4:4:4						Lag/Lead	C1=10kvar C2=20kvar C3=40kvar C4=40kvar C5=40kvar C6=40kvar Control system [4] Capacitance ratio C1:C2:C3:C4:C5:C6=1:2:4:4:4:4							
		C1	C2	C3	C4	C5	C6		Total capacitance	C1	C2	C3	C4	C5	C6	Total capacitance
Lag ▽	1	○						10kvar	Lead △	○	○	○	○	○	○	190kvar
	2		○					20		○	○	○	○	○	○	180
	3	○	○					30		○		○	○	○	○	170
	4			○				40				○	○	○	○	160
	5	○		○				50		○	○		○	○	○	150
	6		○	○				60			○		○	○	○	140
	7	○	○	○				70		○			○	○	○	130
	8			○	○			80					○	○	○	120
	9	○		○	○			90		○	○			○	○	110
	10		○	○	○	○		100			○			○	○	100
	11	○	○	○	○			110		○				○	○	90
	12			○	○	○		120						○	○	80
	13	○		○	○	○		130		○	○				○	70
	14		○	○	○	○		140			○				○	60
	15	○	○	○	○	○		150		○					○	50
	16			○	○	○	○	160							○	40
	17	○		○	○	○	○	170		○	○					30
	18		○	○	○	○	○	180			○					20
	19	○	○	○	○	○	○	190		○						○

Power Factor Controllers
Automatic power factor regulators
QC06E and QC12E



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br


Example 3

Lag/Lead	Step	C1=10kvar C2=20kvar C3=40kvar C4=80kvar C5=80kvar C6=80kvar Control system [5] Capacitance ratio C1:C2:C3:C4:C5:C6=1:2:4:8:8:8						Total capacitance	Lag/Lead	C1=10kvar C2=20kvar C3=40kvar C4=80kvar C5=80kvar C6=80kvar Control system [5] Capacitance ratio C1:C2:C3:C4:C5:C6=1:2:4:8:8:8						Total capacitance	
		C1	C2	C3	C4	C5	C6			C1	C2	C3	C4	C5	C6		
Lag ▽	1	○						10kvar	Lead △	○	○	○	○	○	○	310kvar	
	2		○					20			○	○	○	○	○	○	300
	3	○	○					30		○		○	○	○	○	○	290
	4			○				40				○	○	○	○	○	280
	5	○		○				50		○	○		○	○	○	○	270
	6		○	○				60			○		○	○	○	○	260
	7	○	○	○				70		○			○	○	○	○	250
	8				○			80					○	○	○	○	240
	9	○			○			90		○	○	○		○	○	○	230
	10		○		○			100			○	○		○	○	○	220
	11	○	○		○			110		○		○		○	○	○	210
	12			○	○			120				○		○	○	○	200
	13	○		○	○			130		○	○			○	○	○	190
	14		○	○	○			140			○			○	○	○	180
	15	○	○	○	○			150		○				○	○	○	170
	16				○	○		160						○	○	○	160
	17	○			○	○		170		○	○	○				○	150
	18		○		○	○		180			○	○				○	140
	19	○	○		○	○		190		○		○				○	130
	20			○	○	○		200				○				○	120
	21	○		○	○	○		210		○	○					○	110
	22		○	○	○	○		220			○					○	100
	23	○	○	○	○	○		230		○						○	90
	24				○	○	○	240								○	80
	25	○			○	○	○	250		○	○	○					70
	26		○		○	○	○	260			○	○					60
	27	○	○		○	○	○	270		○		○					50
	28			○	○	○	○	280				○					40
	29	○		○	○	○	○	290		○	○						30
	30		○	○	○	○	○	300			○						20
	31	○	○	○	○	○	○	310		○							10

■ Terminals

Used for	Terminal symbol	Terminal name	Description
Input	P2 (at 220V) P3	Voltage input (220V)	Connect this terminal directly to a 220V power line. Note: The current for the internal control power supply flows between terminal P2 and P3.
	P2 (at 440V) P3	Voltage input (440V)	Connect this terminal directly to a 440V power line. Note: The current for the internal control power supply flows between terminal P2 and P3.
	1S, 1L	Current input	Connect these terminals to the secondary side of a CT.
	E	Ground	Grounding resistance: 100Ω or less
Contact output	COM	Capacitor control output common	Connect the common cable for capacitor connection and disconnection signals. Be sure to connect the upper and middle COM terminals (QC12E)
	C 1 to C12	Control output terminal for C 1 to C12	This terminal output control signals to the capacitor control section (Ex. VMC*) connected to the terminal.
External forced disconnection signal input *2	OFF +	Forced disconnection signal input (positive)	Connect this terminal to one side of a contact for a contact signal input. Connect this terminal to a collector for NPN transistor open-collector signal input.
	OFF -	Forced disconnection signal input (negative)	Connect this terminal to opposing side of a contact for a contact signal input. Connect this terminal to 0V for NPN transistor open-collector signal input.

Notes:
*1 VMC: Vacuum magnetic contactor
*2 Signal input circuits
ON voltage VL < 1.0V
Drain current Io = Approx. 10mA

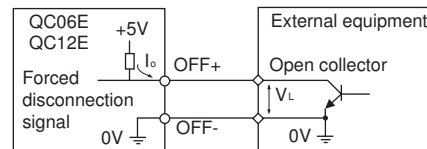

QC06E and QC12E

Main circuit

Upper terminal arrangement

C6	C5	C4	C3	C2	C1	COM	OFF-	OFF+
----	----	----	----	----	----	-----	------	------

Control circuit

Lower terminal arrangement

* NC	* NC	1S	1L	* NC	P3	P2 (220V)	P2 (440V)	E
------	------	----	----	------	----	-----------	-----------	---

*NC: No connection

QC12E only

Main circuit

Middle terminal arrangement

C12	C11	C10	C9	C8	C7	COM
-----	-----	-----	----	----	----	-----


Note: For QC12E, the upper and middle COM terminals are not connected internally. Be sure to connect these terminals.

Power Factor Controllers
Automatic power factor regulators
QC06E and QC12E



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

■ Dimensions, mm

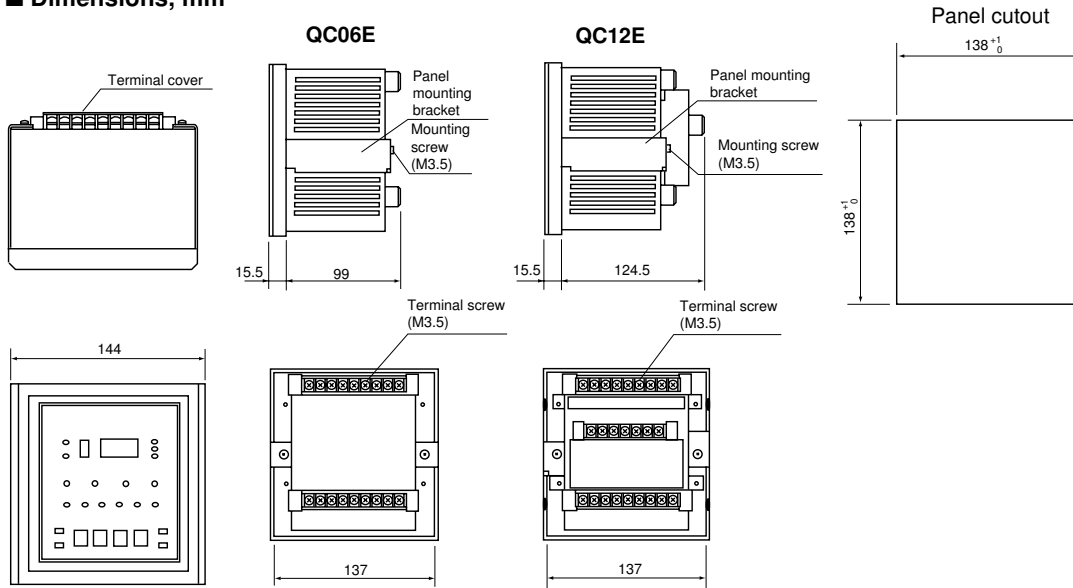

■ Key operations

● Data setting mode

Operation	Key operation	Remarks
Selecting a setting item	▲ or ▼	
Setting a value	▲ ▼ ENT	
Incrementing the data value (+1)	▲	Control mode (Mode A): 1 to 5
Decrementing the data value (-1)	▼	Target power factor (Mode F): 85 to 100
Shifting the digit up	ENT	Delay time (Mode d): 30, 60, 120, 300, or 600 For other modes, be sure to enter a four-digit numeric value. The input order is thousands, hundreds, tens, then ones. Change the set value if a high-order digit is not required, skip the digit by pressing the ENT key, then enter a numeric value (1 to 9) to the next digit. (The skipped digit is not displayed.)
Enter capacitance 0 value	ENT	When the value "0" is blinking, press the ENT key four times to set the value.
Determining the set value	ENT	
Clearing the set value to 0	▲ + ▼ Press at the same time.	This key operation is effective only when the mode symbol is 1 to 9, o, b, c, C, or L and numeric display is blinking.
Resetting all set value	▲ + ▼ Press for five seconds or longer at the same time.	This key operation is effective only when the mode symbol is 1 to 9, o, b, c, C, or L and numeric display is blinking. (All the set items are reset to the shipping setup.)
Stopping the buzzer giving error notification during diagnosis	AUTO SET ▲ ▼ ENT	Any key may be pressed.
Changing mode to auto operation	AUTO SET	

● Auto operation mode
























Operation	Key operation	Remarks
Changing measurement display	▲ + ▼ Press at the same time.	The measurement data display changes cyclically in the following order: Power factor, reactive power, active power, primary voltage, primary current, and no display. The initial display at power-on is power factor data.
Testing capacitor connection	▲ + ENT Press continually at the same time.	For the operation sequence, operation time, and other details, refer to the instruction manual.
Testing capacitor disconnection	▼ + ENT Press continually at the same time.	
Stopping the buzzer giving error notification during diagnosis	AUTO SET ▲ ▼ ENT	Any key may be pressed.
Changing mode to data setting	AUTO SET	

■ Data setting procedure

• Set the following items

1. Capacitor capacitance: Capacitor 1 (150kvar) to 3 (150kvar)
2. Capacitor control mode (example): 2
3. CT ratio (example): 20 (current transformation ratio: 100/50)
4. Target power factor: 100(%)
5. Minimum load: 100(kW)
6. Delay time: 120(s)

• Data setting and change procedure

Data setting flow	Key operation	Display status		Explanation
		Mode	Data	
Power-on *1	Press  key to change already-input data.	1	0000	"0" is set at shipping from the factory.
Mode-1 initial value display				
Capacitor-1 capacitance input awaited	1 	1	0000	"0" starts blinking to wait for capacitor-1 capacitance input. An entry in the thousands place is awaited.
Enter 0 in the thousands place	2 	1	0000	The display value dose not change but "0" is set at the thousand place. An entry in the hundreds place is awaited.
Enter 1 in the hundreds place	3 	1	0100	Enter 1 in the hundreds place.
	4 	1	0100	"1" is set at the hundreds place. An entry in the tens place is awaited.
Enter 5 in the tens place	5 Press  key five times	1	0150	Enter 5 in the tens place.
Enter 0 in the ones place	6 	1	0150	"5" is set at the tens place. An entry in the ones place is awaited.
	7 	1	0150	Capacitor-1 capacitance input has been completed.
Mode-2 initial value display		2	0000	"0" is set at shipping from the factory.
Capacitor-2 capacitance input awaited		2	0000	"0" starts blinking to wait for capacitor-2 capacitance input. An entry in the thousands place is awaited.
Set each place following the above order	2 to 7			Capacitor-2 capacitance input has been completed.
Mode-3 initial value display		3	0000	"0" is set at shipping from the factory.
Enter capacitor-3 capacitance	1 to 7			Capacitor-3 capacitance input has been completed.
Enter 0 for capacitance of capacitor 4 to 12		4 C	0000	The confirmation of capacitance setup (0) has been completed.
To correct an input error or change a set value		Each mode	0000	Data can be entered in a blinking field.
Control-mode initial value display		A	0001	Capacitor control mode: 1 is set at shipment from the factory.
Control-mode input awaited		A	0001	Capacitor control mode: An entry in the control mode is awaited.
Enter 2 in control mode	 or 	A	0002	Capacitor control mode input is in progress.
		A	0002	The input in capacitor control mode has been completed.
CT ratio initial display		C	0000	CT ratio setting mode: "0" is set at shipping from the factory.
CT ratio input awaited		C	0000	"0" starts blinking to wait for CT ratio input. An entry in the thousand place is awaited.
Enter 0 in the thousands place		C	0000	"0" is set at the thousands place. An entry in the hundreds place is awaited.
Enter 0 in the hundreds place		C	0000	"0" is set at the hundreds place. An entry in the tens place is awaited.
Enter 2 in the tens place	 two times	C	0020	Enter 2 in the tens place.

Note:

*1 The initial value setup in mode 1 is always displayed at the first power-on after the unit is delivered from the factory, or displayed if all data have been reset to the factory setup.

*2 Although 0 is set at shipping from the factory, check the setup by incrementing the capacitor numbers with this key.

Data setting flow	Key operation	Display status		Explanation
		Mode	Data	
Enter 0 in the ones place	ENT	C	0020	"2" is set at the tens place. An entry in the ones place is awaited.
	ENT	C	0020	CT ratio input has been completed.
Target power factor initial display	^	F	98	Target power factor: "98" is set at shipping from the factory.
Target power factor input awaited	ENT	F	98	An entry of target power factor is awaited.
Enter target power factor "100"	^ or v	F	100	Target power factor input is in progress.
	ENT	F	100	Target power factor input has been completed.
Minimum load initial display	^	L	000	Minimum load: "0" is set at shipping from the factory.
Minimum load input awaited	ENT	L	0000	"0" is set at the thousands place. An entry in the thousand place is awaited.
Enter 0 in the thousands place	ENT	L	0000	"0" is set at the thousands place. An entry in the hundreds place is awaited.
Enter 1 in the hundreds place	^	L	0100	Enter "1" in the hundreds place.
Enter 0 in the tens place	ENT	L	0100	"1" is set at the hundreds place. An entry in the tens place is awaited.
	ENT	L	0100	"0" is set at the tens place. An entry in the ones place is awaited.
Enter 0 in the ones place	ENT	L	0100	Minimum load input has been completed.
	^	d	300	Delay time: "300" is set at shipping from the factory.
Delay time initial display	ENT	d	300	An entry of delay time is awaited.
Delay time input awaited	^ or v	d	120	Delay time input is in progress.
Enter delay time 120		ENT	d	120
Data setting completed	AUTO SET	Display item	Measured data	Measured data is displayed.

• **Supplemental explanations**

1. Mode symbols 1 to 9 and o, b, c.
- The capacitor bank is never connected when the capacitance is set to 0.
- The capacitor bank is never disconnected when the capacitance is set to 9999.
- When multistep control is selected, only the capacitance of mode symbol 1 becomes valid. No data needs to be set for mode symbols 2 to 9 and o, b, c.

2. Capacitor connection and disconnection

Mode symbol	Set value	Description
A	1	Cyclic/optimum control
	2	Unconditional cyclic control
	3	Multistep control, capacitance ratio 1:2:2:2:2:2:2:2:2:2
	4	Multistep control, capacitance ratio 1:2:4:4:4:4:4:4:4:4
	5	Multistep control, capacitance ratio 1:2:4:8:8:8:8:8:8:8

A capacitor discharger recommended for multistep control of A3, A4, or A5 is a discharging coil which reduces the residual voltage of the capacitor to 50 volts or less within five seconds.

3. If “100%” is set as the target power factor of mode symbol F, a control of leading reactive power is performed.
4. Set the minimum load value to one slightly higher than the actual minimum load of the equipment to ensure an accurate light-load disconnection even when the measuring error or circuit constant fluctuates slightly.

Example: When the actual minimum load of the equipment is 100kW, set the value to 120kW (100 × 1.2).

Note:

Select a delay time suitable for the capacitor discharger. When using a discharging resistor, set the delay time to 300s (5min) or 600s (10min). An inappropriate delay time may damage capacitors or reduce their service lives.

■ Calculating CT ratios

• CT ratio

Example: When the primary current is 400A and secondary current is 5A.
 $400 \div 5 = 80$ CT ratio = 80

■ Determining capacitances and number of capacitor banks to improve the power factor by switching-on capacitors

The capacitances and the number of capacitor banks are determined as follows:

• For capacitors having the same capacitances


When load variation (increase and decrease of load) is frequent.

1. Determining the target power factor

Consider how far the power factor can be improved from the current value by automatic control.

Example

Current power factor (before improvement): 0.8
Target power factor (after improvement): 0.98
Maximum demand power: 1000kW

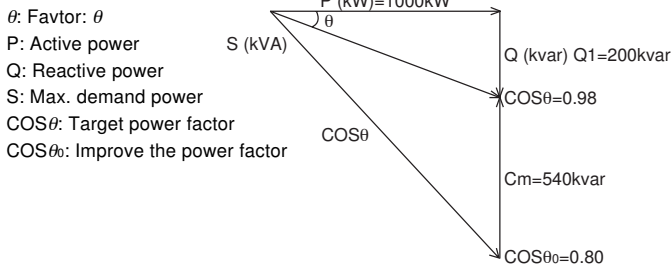

2. Calculating the capacitances needed to improve the power factor

See the capacitor selection chart (Page 09/101) to calculate the necessary capacitance.

Example

To improve the power factor from 0.8 to 0.98, the factor K_1 should be 0.54. Therefore, the necessary capacitance (C_m) is obtained as follows:
 $C_m = \text{Maximum demand power} \times K_1 = 1000\text{kW} \times 0.54 = 540\text{kvar}$
The necessary capacitance is 540kvar.

3. Calculating the target reactive power

Calculate the target reactive power from the target power factor (after improvement) and the maximum demand power.

Example

The target value is calculated using the factor K_2 selection table. (Page 09/101)
Target power factor: 0.98
 $K_2=0.2$
The target reactive power (Q_1):
 $Q_1 = \text{Maximum demand power} \times K_2$
 $= 1000\text{kW} \times 0.2$
 $= 200\text{kvar}$

4. Determining the number of capacitor banks

Determine the number of capacitor banks from the necessary capacitance for power factor improvement and target reactive power.

Example

Determine the number of capacitor banks as follows:

$$n = \frac{\text{Necessary capacitance for power factor improvement (Cm)}}{\text{Target reactive power (Q}_1\text{)}}$$

(1) If $n \geq 6$, the number of banks should be six.

(2) If $n < 6$, the number of banks should be n.

(Round up any fraction)

In this example,

$$n = \frac{540\text{kvar}}{200\text{kvar}} = 2.7 < 6$$

If the fraction is rounded up, the number of necessary banks is 3.

Note: The necessary capacitance for power factor improvement (C_m) means the total capacitance to be controlled by this unit.

5. Calculating the capacitance per capacitor bank

If each bank should have the same capacitance, the capacitance needed to improve the power factor must be divided by the number of banks calculated at step 4.

Example

Capacitance per capacitor bank:

$$C_o = \frac{\text{Capacitance needed to improve the power factor (Cm)}}{\text{Number of capacitor banks (n)}}$$

In this example,

$$C_o = \frac{C_m}{n} = \frac{540\text{kvar}}{3 \text{ (banks)}} = 180\text{kvar}$$

Since there are no 180kvar capacitors, a 200kvar-capacitor can be used.

• For capacitors having unequal-capacitances

When load variation is a slight and stable all the year round. Target power factor and the necessary capacitance for power factor improvement are calculated using step 1 and 2.

Current power factor (before improvement): 0.8


Target power factor (after improvement): 0.98

Necessary capacitance for power factor improvement (C_m): 540kvar

For load variation as shown below, calculate the reactive power variation using K_1 .

Example

- When P_1 is 150kW, $Q_1 = P_1 \times K_1 = 150 \times 0.54 = 81\text{kvar}$
Capacitor $C_1 = 100\text{kvar}$
- When P_2 is 400kW, $Q_2 = 216\text{kvar}$
Capacitor $C_2 = Q_2 - C_1 = 116\text{kvar}$, $C_2 = 150\text{kvar}$
- When P_3 is 600kW, $Q_3 = 324\text{kvar}$
Capacitor $C_3 = Q_3 - (C_1 + C_2) = 74\text{kvar}$, $C_3 = 100\text{kvar}$
- When P_4 is 1000kW, $Q_4 = 540\text{kvar}$
Capacitor $C_4 = Q_4 - (C_1 + C_2 + C_3) = 190\text{kvar}$, $C_4 = 200\text{kvar}$

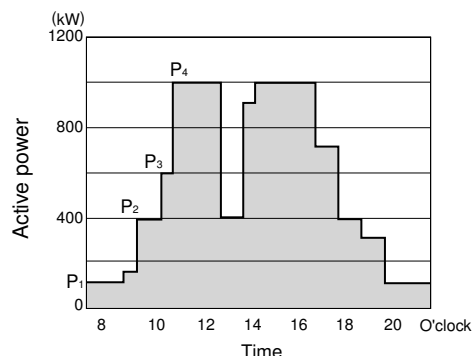

■ Capacitor selection / Factor K₁

Obtain the value of the capacitor required for improving the power factor by referring to the following list:

		Power factor after being improved = cosθ ₁																													
		1.00	0.99	0.98	0.97	0.96	0.95	0.94	0.93	0.92	0.91	0.9	0.875	0.85	0.825	0.8	0.775	0.75	0.725	0.7	0.675	0.65	0.625	0.6	0.575	0.55	0.525	0.5	0.475	0.45	0.425
Power factor before being improved = cosθ ₀	0.4	2.30	2.16	2.10	2.05	2.01	1.97	1.94	1.90	1.87	1.84	1.82	1.75	1.68	1.61	1.55	1.49	1.42	1.35	1.28	1.21	1.13	1.05	0.96	0.88	0.78	0.68	0.57	0.45	0.32	0.17
	0.425	2.13	1.98	1.92	1.88	1.84	1.80	1.76	1.73	1.70	1.67	1.64	1.57	1.51	1.44	1.38	1.31	1.24	1.18	1.11	1.04	0.96	0.88	0.79	0.71	0.61	0.51	0.40	0.27	0.15	
	0.45	1.98	1.83	1.77	1.73	1.68	1.65	1.61	1.58	1.55	1.52	1.49	1.42	1.36	1.29	1.23	1.16	1.10	1.03	0.96	0.89	0.81	0.73	0.64	0.56	0.46	0.36	0.24	0.12		
	0.475	1.85	1.71	1.65	1.61	1.56	1.53	1.49	1.46	1.43	1.40	1.37	1.30	1.23	1.16	1.10	1.04	0.98	0.91	0.84	0.76	0.68	0.60	0.52	0.44	0.33	0.23	0.12			
	0.5	1.73	1.59	1.53	1.48	1.44	1.40	1.37	1.34	1.30	1.28	1.25	1.18	1.11	1.04	0.98	0.92	0.85	0.78	0.71	0.64	0.56	0.48	0.40	0.31	0.21	0.11				
	0.525	1.62	1.48	1.42	1.37	1.33	1.29	1.26	1.22	1.19	1.17	1.14	1.07	1.00	0.93	0.87	0.81	0.74	0.67	0.60	0.53	0.45	0.37	0.29	0.20	0.10					
	0.55	1.52	1.38	1.32	1.27	1.23	1.19	1.16	1.12	1.09	1.06	1.04	0.97	0.90	0.83	0.77	0.71	0.64	0.57	0.50	0.43	0.35	0.27	0.19	0.10						
	0.575	1.42	1.28	1.22	1.17	1.14	1.10	1.06	1.03	0.99	0.96	0.94	0.87	0.80	0.74	0.67	0.60	0.54	0.47	0.40	0.33	0.25	0.17	0.08							
	0.6	1.33	1.19	1.13	1.08	1.04	1.01	0.97	0.94	0.91	0.88	0.85	0.78	0.71	0.65	0.58	0.52	0.46	0.39	0.32	0.24	0.16	0.085								
	0.625	1.25	1.11	1.05	1.00	0.96	0.92	0.89	0.85	0.82	0.79	0.77	0.70	0.63	0.56	0.50	0.44	0.37	0.30	0.23	0.16	0.08									
	0.65	1.17	1.03	0.97	0.92	0.88	0.84	0.81	0.77	0.74	0.71	0.69	0.62	0.55	0.48	0.42	0.36	0.29	0.22	0.15	0.08										
	0.675	1.09	0.95	0.89	0.84	0.80	0.76	0.73	0.70	0.66	0.64	0.61	0.54	0.47	0.40	0.34	0.28	0.21	0.14	0.07											
	0.7	1.02	0.88	0.81	0.77	0.73	0.69	0.66	0.62	0.59	0.56	0.54	0.46	0.40	0.33	0.27	0.20	0.14	0.07												
	0.725	0.95	0.81	0.75	0.70	0.66	0.62	0.59	0.55	0.52	0.49	0.46	0.39	0.33	0.26	0.20	0.13	0.07													
	0.75	0.88	0.74	0.67	0.63	0.58	0.55	0.52	0.49	0.45	0.43	0.40	0.33	0.26	0.19	0.13	0.065														
	0.775	0.81	0.67	0.61	0.57	0.52	0.49	0.45	0.42	0.39	0.36	0.33	0.26	0.19	0.12	0.065															
	0.8	0.75	0.61	0.54	0.50	0.46	0.42	0.39	0.35	0.32	0.29	0.27	0.19	0.13	0.06																
	0.825	0.69	0.54	0.48	0.44	0.40	0.36	0.33	0.29	0.26	0.23	0.21	0.14	0.07																	
	0.85	0.62	0.48	0.42	0.37	0.33	0.29	0.26	0.22	0.19	0.16	0.14	0.07																		
	0.875	0.55	0.41	0.35	0.30	0.26	0.23	0.19	0.16	0.13	0.10	0.07																			
0.9	0.48	0.34	0.28	0.23	0.19	0.16	0.12	0.09	0.06	0.028																					
0.91	0.45	0.31	0.25	0.21	0.16	0.13	0.09	0.06	0.028																						
0.92	0.43	0.28	0.22	0.18	0.13	0.10	0.06	0.031																							
0.93	0.40	0.25	0.19	0.15	0.10	0.07	0.033																								
0.94	0.36	0.22	0.16	0.11	0.07	0.036																									
0.95	0.33	0.18	0.12	0.08	0.035																										
0.96	0.29	0.15	0.09	0.04																											
0.97	0.25	0.11	0.05																												
0.98	0.20	0.06																													
0.99	0.14																														

k: Figures obtained by cosθ₀ and cosθ₁

■ Factor K₂ selection


Power factor (cosθ ₂)	0.7	0.75	0.8	0.85	0.875	0.9	0.91	0.92	0.93	0.94	0.95	0.96	0.97	0.98	0.99
$K_2 = \sqrt{\frac{1}{\cos^2 \theta_2} - 1}$	1.02	0.88	0.75	0.62	0.55	0.48	0.45	0.43	0.40	0.36	0.33	0.29	0.25	0.20	0.14

K₂: Figures obtained by cos θ₂


Power monitoring equipment (F-MPC) F-MPC60B, F-MPC30, F-MPC04 series

■ Description

- FUJI power monitoring equipment (F-MPC) realizes fine power management to contribute to energy-saving.
- We can offer you various F-MPC equipment such as F-MPC04 series power monitoring unit that measures electric power of one to multi-circuits, and compact size F-MPC60B, F-MPC30 series multifunctional digital relay that protects, controls, and measures high-voltage distribution facilities.
- As support tool, a power monitoring system software, F-MPC-Net is also available, which collects and analyzes data measured by F-MPC.
- As related products of F-MPC, molded case circuit breaker with ZCT and split type current transformer are introduced.

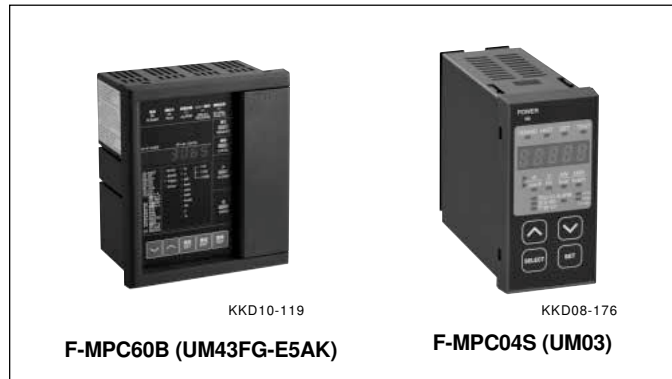


■ Power monitoring equipment used in power distribution system

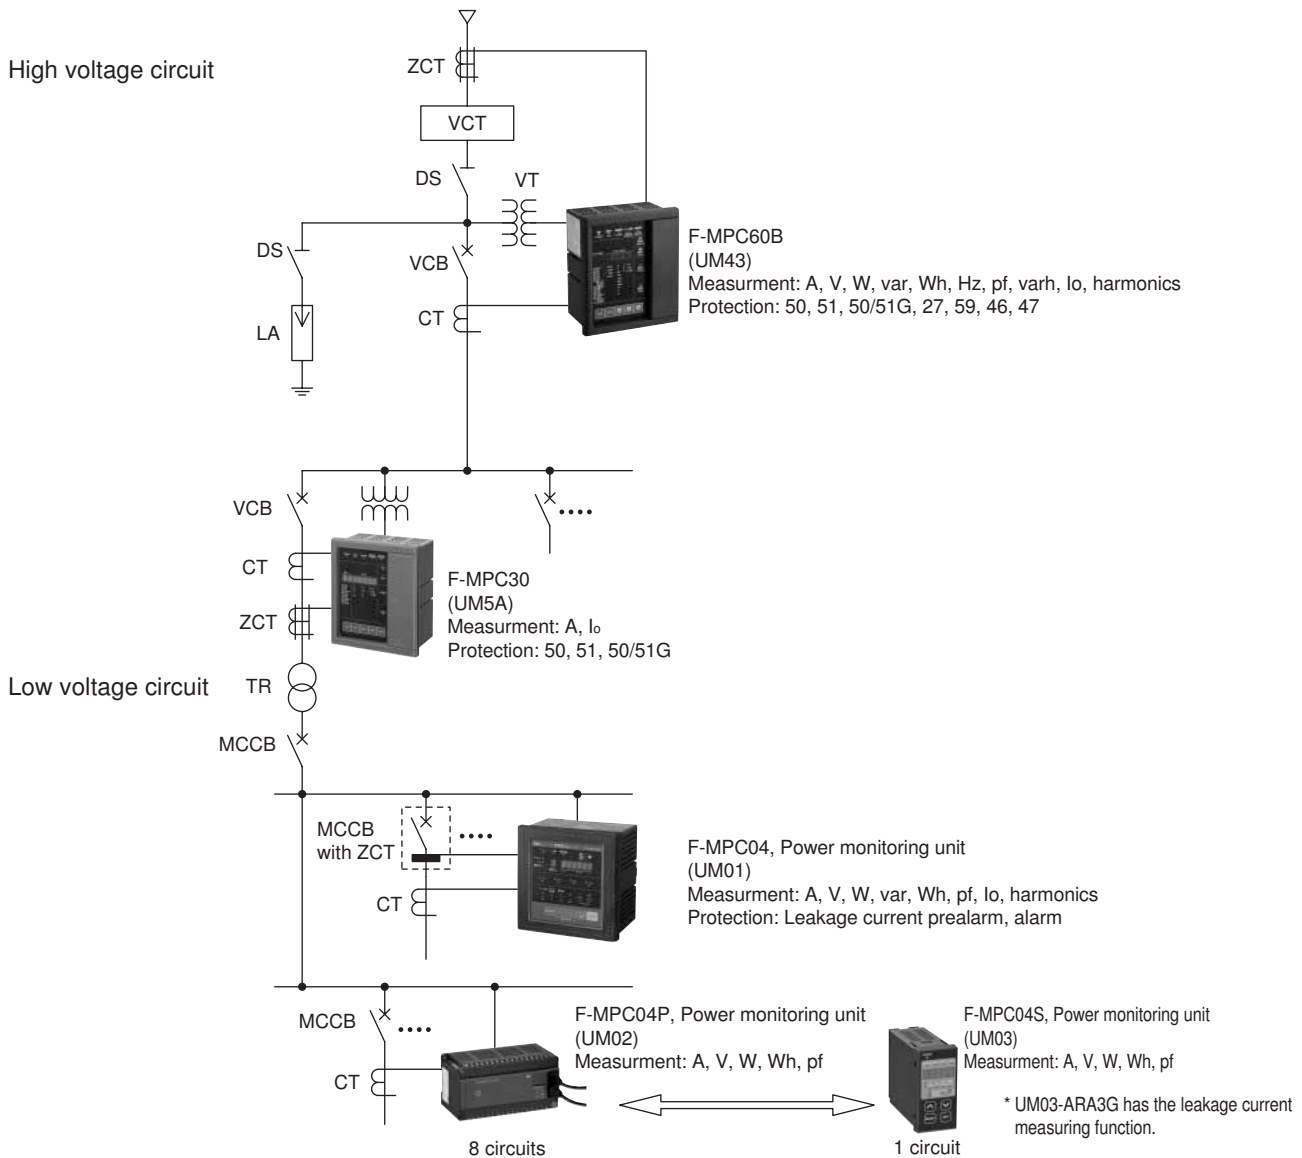

Multiple function protectors and controllers F-MPC60B, F-MPC30 series

■ Description

- FUJI multiple function protector and controller (F-MPC) performs energy control to contribute to energy-saving. The F-MPC60B and F-MPC30 are a kind of multifunctional digital relays.
- Although these series are very compact, they integrate multiple functions in a compact body, such as protection, measurement, operation, and monitoring of high-voltage power distribution and switching facilities. They can also transmit data obtained from these functions to upper level controllers.

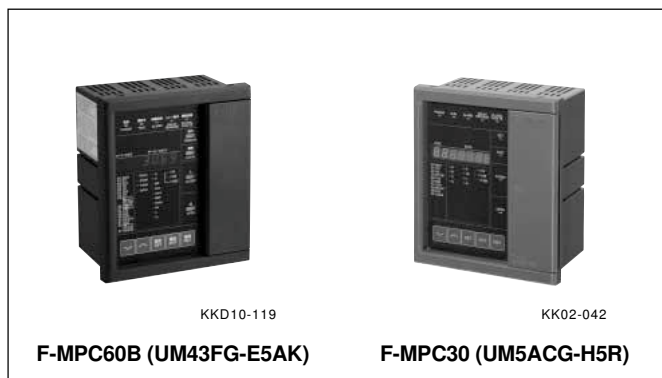

■ Functions

The functions of F-MPC60B and F-MPC30 series are listed below.

Series		F-MPC60B	F-MPC30
Type		UM43FG-E5AK	UM5ACG-H5R
Installation location		Receiving or feeder	Feeder
Application (phase: line)		3:3, 3:4	3:3, 3:4
VT voltage	Input	2VT/3VT star	—
	Voltage indication	Between phases, between lines	—
Ground fault system	System type	Direct/resistance	Direct/resistance
	IO detection	①Residual (3XCT) ②Tertiary winding (100/5A) ③ZCT (5 to 100/5A) ④ZCT (5 to 400/5A) ⑤ZCT (200/1.5mA) ⑥ZCT (100/1A) or (70/1A) or secondary I input (0.002 to 0.4A)	○ ○ ○ ○ — —
E0 detection * Feeder: Depending on MN signal.	EVT (3Ry= 110V)	—	—
	EVT (3Ry= 190V)	—	—
	ZPD-1 (FUJI-made)	—	—
	MN signal output MN signal input	— —	— —
Protective characteristic (current)	SI, VI, LT, EI, I ² t	○	○ (without I ² t)
	DT1 (short-time)	○	○
	DT2 (definite-time)	○	○
Control voltage	Rating	100V DC	100/200V DC
	Allowable range	80 to 143V DC	80 to 286V DC
Transducer output selection	No. of output pole	6	—
	(Function and terminal)	Select	—
No. of DI/DO		8 : 8	1 : 3
No. of CPU		2	1
External plug		—	○
CB close/open	CB making slow-down monitoring function	○	—
	Harmonic voltage (3, 5, 7, Total)	—	—
	Harmonic current (3, 5, 7, Total)	○	—
	Demand current	○	—
Display mode	All or part: changeable	○	— (All only)

○ Available — Not available

Power Monitoring Equipment
Multiple function protectors and controllers
F-MPC60B, F-MPC30



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

■ **Functions (continued)**

Series			F-MPC60B	F-MPC30	
Type			UM43FG-E5AK	UM5ACG-H5R	
Installation location			Receiver or feeder	Feeder	
Protection	Overcurrent Instantaneous	50	○	○	
	Overcurrent Short-time	51DT1	○	○	
	Overcurrent Definite-time	51DT2	○	○	
	Overcurrent Inverse-time *1	51	○	○*2	
	Ground-fault Instantaneous	50G	○	○	
	Overcurrent Inverse-time *2	51G	○	○	
	Ground fault directional	67	—	—	
	Phase-loss	46	○*3	—	
	Inverse-phase	47	○*3	—	
	Voltage established	84	—	—	
	Undervoltage	27	○	—	
	Overvoltage	59	○	—	
	Ground-fault overvoltage	64	—	—	
	Current prealarm	OCA	○	○	
	Ground-fault current prealarm	OCGA	○	○	
	Measurement	Current (r, s, t)	A	○	○
		Voltage (line)	V	○	—
		Voltage (phase)		○	—
Active power (±)		W	○	—	
Reactive power (±)		Var	○	—	
Power-factor (±)		PF	○	—	
Frequency		Hz	○	—	
Active electric energy (+)		WHM	○	—	
Active electric energy (-)		WHM	○	—	
Reactive electric energy (+)		VarH	○	—	
Reactive electric energy (-)		VarH	○	—	
Ground fault (zero-phase) voltage		V0	—	—	
Ground fault (zero-phase) current		A0	○	○	
Harmonic current (3, 5, 7, Total)		HA	○	—	
Harmonic voltage (3, 5, 7, Total)		HV	—	—	
Demand current (r, s, t)		DA	○	—	
Demand active power		DW	○	—	
Max. zero-phase current value			○	○	
Max. zero-phase voltage value			—	—	
Max. demand current value (r, s, t)			○	—	
Max. demand power			○	—	
Total electric energy (+)			○	—	
Total electric energy (-)			○	—	
Min. voltage value (between lines)		○	—		
Preventive maintenance	50(INST)	Operation Count	○	○	
	51DT1	Operation Count	○	○	
	51DT2	Operation Count	○	○	
	51	Operation Count	○	○	
	67DG	Operation Count	—	—	
	50G	Operation Count	○	○	
	51G	Operation Count	○	○	
	OCA	Operation Count	○	○	
	OCGA	Operation Count	○	○	
	Phase loss	Operation Count	○*3	—	
	Inverse phase	Operation Count	○*3	—	
	27	Operation Count	○	—	
	59	Operation Count	○	—	

*1 with SI, VI, LT, EI, and I²t characteristics *3 Available for version 1 or later.

*2 with SI, VI, LT, and EI characteristics

○ Available — Not available

Multiple function protectors and controllers F-MPC60B series, UM43FG-E5AK

■ Description

Although the F-MPC60B series is very compact, it integrates multiple functions in one body, such as protection, measurement, operation, and monitoring of high-voltage power distribution and switching facilities. It can also transmit the data obtained with these functions to upper level controllers.

■ Features

Flexibility

In accordance with changes in circuit conditions such as CT ratio, the setting of the F-MPC60B can be easily changed.

Improved maintainability

Preventive maintenance and fault analysis can be easily made with the functions that display operation history and fault data.

High reliability

To prevent operation errors such as circuit disconnection, the F-MPC60B series has dual CPUs that check with each other for confirmation and dual output circuits from which output signals are always checked.

■ Specifications

• General specifications

Type	UM43FG-E5AK	
Control power supply	100V DC (80 to 143V)/ 100V AC (85 to 132V) common use	
Control power consumption	Max. 15W	
Power consumption of CT, VT	Max. 1.0VA	
Rated current (CT secondary current)	5A AC ("1A AC" model is also available (non-standard).)	
Rated voltage	Line voltage	Select "110V AC" or " $110\sqrt{3}$ AC" (VT secondary voltage)
	Phase voltage	Select " $110V/\sqrt{3}$ AC" or "110V AC" (VT secondary voltage)
Zero-phase current	5A AC	
Insulation resistance	10M Ω (min.) between ground and electric circuits connected together	
Vibration resistance	16.7Hz 1.96m/s ² , 0.4mm double amplitude, 10 minutes each in X, Y, and Z directions	
Shock resistance	300m/s ² , three times each in X, Y, and Z directions	
Withstand voltage	2kV AC 1 minute between ground and electric circuits connected together, excluding, RS-485 signal, MN signal, and kWh-pulse output signal cables	
Noise resistance	JEC2500 (conforming to ANSI), square wave, 1.5kV, 1ns/1 μ s, for 10 minutes.	
Overload resistance	CT circuit: at rating 40times, a second, 2 times VT circuit: at rating 1.25 times, 10 second	
Lightning impulse noise resistance	5.0kV (between ground and electrical circuits connected together)	
Dropout tolerance	20ms (Operation continues, however, display goes out.)	
Electrostatic discharge	Contact discharge: ± 8 kV Aerial discharge: ± 15 kV	
Ambient temperature	Operating: -10 to + 60°C (operation guaranteed) 0 to + 40°C (characteristics guaranteed) (no icing) *1 Storage: - 25 to + 70°C (no icing)	
Humidity	20 to 90% RH (no condensation)	
Atmosphere	No corrosive gas and no heavy dirt and dust.	
Grounding	Class D grounding (100 Ω or less)	
Applicable standard	JEC2500 (Protective relays for electric power systems), JEC-2510 (Overcurrent relays), JEC-2511 (Voltage relays), JIS C4602 (Overcurrent relays for 6.6kV receiving), JIS C1102-1 to -9 (Direct acting analogue electrical instrument and their accessories), IEC255-3 (1989), -5, -6	
Mass	1.4kg	

*1: The operation guaranteed temperature is a temperature at which operation is guaranteed within two times of the guaranteed accuracy value at JEC characteristics guaranteed temperature, or within the accuracy of influence of JIS temperature.



RS-485 communication interface

Two protocol types are available: MPC-Net protocol and MODBUS protocol.*

Note: * MODBUS protocol is available for version 1 or later.

■ Specifications

• Input/output specifications

Input circuit	Applicable to both 100V DC (max. 143V) and 100V AC (max. 132V) Pick up voltage: 40 to 70V DC/40 to 70V AC	
Output circuit	Circuit breaker ON/OFF/trip	Making current: 15A (110V DC), allowable continuous current: 4A
	Other than above	Making/breaking current: 0.2A (110V DC, inductive load L/R = 15ms or less), allowable continuous current: 1A

• Measurement and display specifications

	Effective measuring and display range	Accuracy *2
Current/Demand current/ Max. demand current	0, 0.8% to CT rating to $8 \times$ CT rating *1	$\pm 1.5\%$ (0, 0.8 to 100%), $\pm 5\%$ (100 to 800%)
Zero-phase current/Max. zero-phase current	CT: 0, 2% to CT rating to $8 \times$ CT rating	$\pm 1.5\%$: 0, 2% to CT rating, $\pm 5\%$: others
Active power Demand active power/ Reactive power	± 0.004 to ± 1 kW at VT secondary circuit (The value is converted into the VT rated voltage)	$\pm 1.5\%$: 0, ± 0.004 to ± 1 kW See the figure below.
Power factor	Lead 0% - 100% - Lag 0%	$\pm 5\%$ (Lagging: no sign, leading: - sign) See the figure below.
Active electric energy *3 Reactive electric energy	0 to 99999, multiplying factor: 1, 10, 100, 1000	Equivalent to ordinary instruments shown in Table 4 specified in JIS C 1216 (instrument with a transformer)
Line voltage	9.5 to 260V on VT secondary side	$\pm 1.5\%$
Phase voltage	5.5 to 150V on VT secondary side	$\pm 1.5\%$
Frequency	45 to 55Hz (50Hz), 55 to 65Hz (60Hz)	$\pm 0.5\%$
Max. demand value	Same as the above range	-
Harmonics current	3rd, 5th, 7th, overall harmonics	-


*1 The fault current up to 2000% (accuracy: $\pm 5\%$) can be displayed.

*2 "0, a to n%" means that "0" is indicated if a value is less than a%.

*3 There are two indications in the electric energy indication; total electric energy indication (zero clear disable) and periodic electric energy indication (zero clear is enable).

The sign "±" in electric measuring

The sign "±" is used to display "LEAD/LAG" in power-factor, measuring and "electric power selling/purchase" in electric power measuring. No signs are used if a value is "+". The sign "±" has the following meanings depending on the measured items.

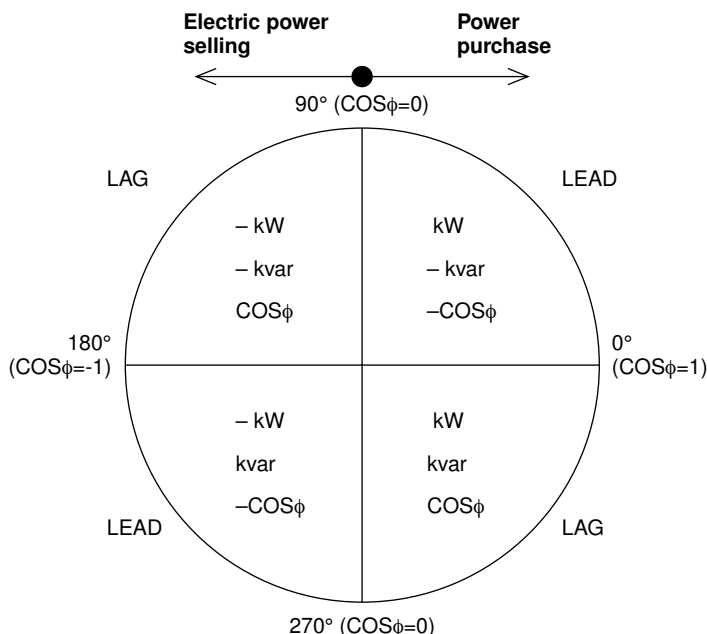

- Active power: kW
+: Power purchase (Consumed electric power)
-: Electric power selling (Inverse electric power flow)
- Reactive power: kvar
+: Lagging current by reactive volt-ampere meter method
-: Leading current by reactive volt-ampere meter method
* "LEAD/LAG" reverses with electric power selling/purchase.
- Power factor: $\text{COS}\phi$
+ : LAG - : LEAD

■ Specifications

• History data

Item	Display range	Display code
50 (INST) operation count	0 to 9999	H0
51DT1 operation count	0 to 9999	H1
51 (OC) operation count	0 to 9999	H2
51G operation count	0 to 9999	H3
50G operation count	0 to 9999	H4
59 (OV) operation count	0 to 9999	H6
27 (UV) operation count	0 to 9999	H7

* Other history display: Fault value display (on occurrence of a fault), history maximum values of zero-phase current/voltage, maximum demand value (A, W), and minimum instantaneous voltage

Item	Display range	Display code
46 operation count	0 to 9999	H9
47 operation count	0 to 9999	HA
OCA operation count	0 to 9999	Hb
Running time	0 to 9999 × 100 (h)	Hc
ON/OFF operation	0 to 9999 × 10 (times)	Hd
OCGA operation count	0 to 9999	Hn
51DT2 operation count	0 to 9999	HP

* The display codes are the codes to be displayed on this F-MPC60B (UM43FG-E5AK).

• Specifications of protective relays

Item	Setting range of current/voltage operate value	Setting range of operate time (timer)	Characteristics	
			Operate value	Operate time
50 (Instantaneous)	1 to 20 times of CT rated current (in 0.2 times step), Lock	Fixed	±5%	40ms or less
51DT1 (Definite time)	1 to 20 times of CT rated current (in 0.2 times step), Lock	0 to 5s (in 0.05 step)	±5%	Less than 1s ±50ms More than 1s ±5%
51DT2 (Definite time)	20 to 240% of CT rated current (2% step), Lock	0 to 10s (0.1s step)	±5%	Less than 1s ±50ms More than 1s ±5%
51 (Inverse time) SI, EI, VI, LT, I ² t	20 to 240% of CT rated current (2% step), Lock	Time multiplication: 0.5 to 20 times, (in 0.1 times step) (Minimum operation time: 150ms)	±5%	Setting = 300%: ±12% 500, 1000%: ±7% (lower limit ± 100ms)
50G, 50N (Instantaneous/definite time)	0.2 to 8 times of CT rated current (in 0.1 times step), Lock	0.0 to 10s to 180s *1	±5%	±5% (lower limit ±50ms)
51G, 51N SI, EI, VI, LT	0.02 to 1.00 times of CT rated current (in 0.01 times step), Lock	Time multiplication: 0.5 to 20 times (in 0.1 times step) (Minimum operation time: 150ms) *1	±5% (min. ± 100mA)	Setting = 300%: ±12% 500, 1000%: ±7% (lower limit ± 100ms)
59V (OV)	VT secondary voltage: 60 to 150V (1V step), lock	0.0 to 5.0s to 60s (in 0.5s step) (in 1s step)	±5%	±5% (min. ±50ms)
27V (UV)	VT secondary voltage: 10 to 100V (1V step), lock	0.0 to 5.0s to 60s (in 0.5s step) (in 1s step)	±5%	±5% (min. ±35ms)
46 (Open-phase)	—	—	Unbalanced rate 50 - 80%	2s (fined)
47 (Phase sequence relay)	—	—	—	0.5s on less
OCA (Overcurrent pre-alarm)	10 to 100% of CT rated current (in 5% step), Lock	10 to 200s (in 10s step)	±10%	±5%
OCGA (Leakage current pre-alarm)	50, 60, 70, 80% of the setting value of "51G operating current", Lock	10 to 200s (in 10s step)	±10% (min±200mA)	±5%

*1 When a current exceeds 15% of the rated fundamental wave current, the malfunction preventive function against the exciting inrush current activates. (When the contents of the second higher harmonics are about 15% or higher, the feature will lock outputs.) Note that with the 50G relay, the malfunction preventive function against the exciting inrush current will not activate if you set the operate time at 0s.

• Communications specifications

Protocol	MODBUS protocol mode	MPC-Net mode
Standard	EIA-485	EIA-485
Data exchange method	polling/selecting system	1: N polling/selecting system
Transmission distance	1000m (total length)	1000m (total length)
No. of connectable units	Up to 32 units (including master unit)	Up to 32 units (including master unit)
Station number address	01 to 99	01 to 99
Transmission speed	4800/9600/19200 bps (selectable)	4800/9600/19200 bps (selectable)
Data format	Number of start bits: 1 (fixed) Data length: 8 bits (fixed) Parity bit: None/even/odd (selectable) Stop bits: 1 bit or 2 bit (automatic selection) 1 bit: for "even or odd" parity 2 bit: for "none" parity	Number of start bits: 1 (fixed) Data length: 7/8 bits (selectable) Parity bit: None/even/odd (selectable) Stop bits: 1 (fixed) BCC= Even horizontal parity

■ **Specifications**

• **Specifications of transducer outputs**

Transducer output signal		4 to 20mA DC (external load resistance: 270Ω or less)	
Signal type	Current (Ia, Ib, Ic)	4 to 20mA for 0 to CT rated current	Accuracy ±1.5%
	Line voltage (Vab, Vbc, Vca)	For VT secondary 0 to 150V, 4 to 20mA * ¹ 0 to 150V $\times\sqrt{3}$, 4 to 20mA * ²	
	Phase voltage (Van, Vbn, Vcn)	For VT secondary 0 to 150V/ $\sqrt{3}$, 4 to 20mA * ¹ 0 to 150V, 4 to 20mA * ²	
	Active power (W)	For 0 to 1kW (CT5A, VT110V AC conversion), 4 to 20mA	
	Reactive power (var)	For -1 to 0 to 1kvar (CT5A, VT110V AC conversion), 4 to 12 to 20mA	
	Frequency (Hz)	For 45 to 55Hz or 55 to 65Hz, 4 to 20mA	
	Power factor	For LEAD 0.5 to 1 to 0.5 LAG, 4 to 12 to 20mA	

Note: • Output signals are connected to a common terminal (minus side).

• An upper or lower limiter operates when the output signal is about to exceed the upper or lower limit.

The upper limit is fixed at 20mA, and the lower limit is fixed at 20mA.


*¹: Applied line voltage: 100V/110V/120V AC.

*²: Applied line voltage: 100V/110V/120V AC $\times\sqrt{3}$, AC.


• **Specifications of kWh pulse output**

Type of output	Transistor, open collector
Ratings	Max. 150V DC, 100mA
Pulse width	200 ± 20ms
Pulse rate	10 ⁿ kWh per pulse (n=-2 to 4) (integer), or 2000 pulses per kWh

■ **Type number nomenclature**

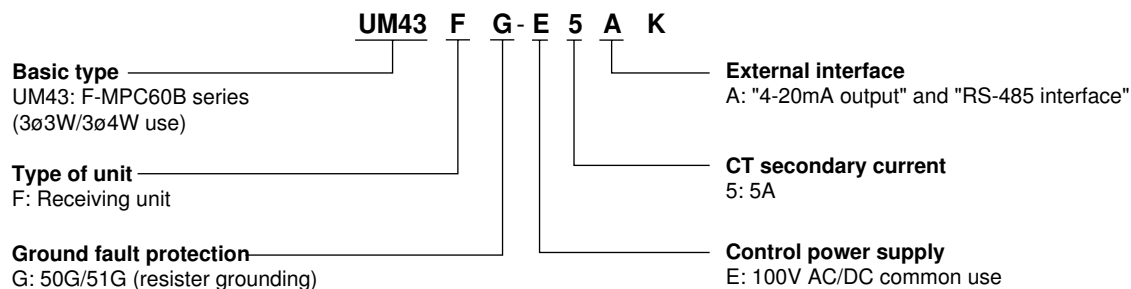


■ Example of external wiring diagrams

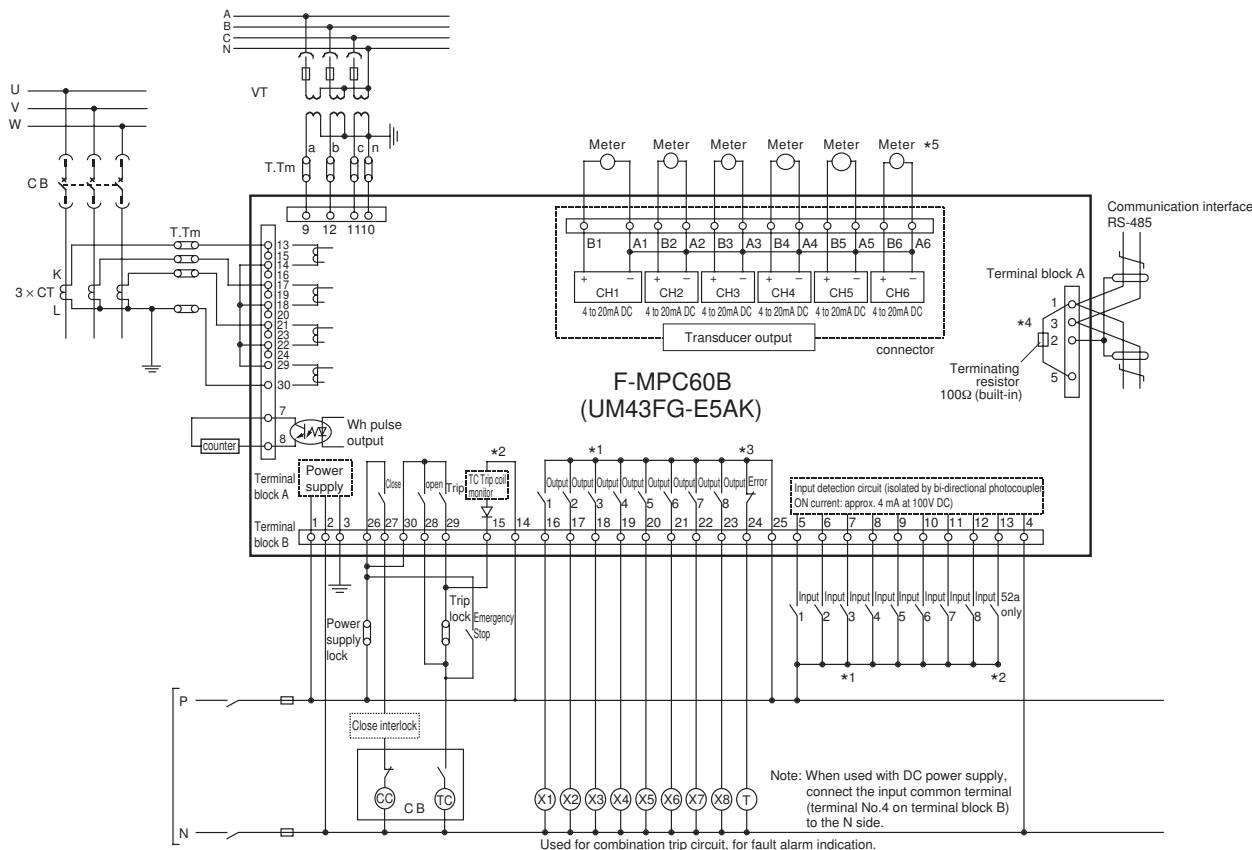

- Note:
- *1 Use selective input 1 to 8 and selective output 1 to 8 by selecting the function type by setup.
 - *2 Outputs of "ON, OFF, TRIP and equipment error" are used exclusively. Inputs of "52a: the answer back signal of CB ON" and "the monitoring of TC coil" are used exclusively.
 - *3 Equipment error output is a normally closed contact (normally excited, and if an error occurs, excitation terminates and contact opens). Therefore, a time delay of about 100ms occurs before the contact opens, since the power has been on (in operation). Consider the use of a timer, if necessary, if you create an external sequence.
 - *4 If this unit, being provided with RS-485 communication function, is located at the termination of a communication line, connect terminals No.3 and 5. With this, the 100Ω terminating resistor is connected across the RS-485 bus.
 - *5 Use twisted wires (cables) as the output cable of transducer.
 - If you have to connect a heavy load exceeding relay's contact rating, be sure to use it in combination with FUJI's miniature power relay HH6□. See page 09/106 "Input/output specifications."

■ **Time-current characteristic**


Standard inverse (SI) characteristics

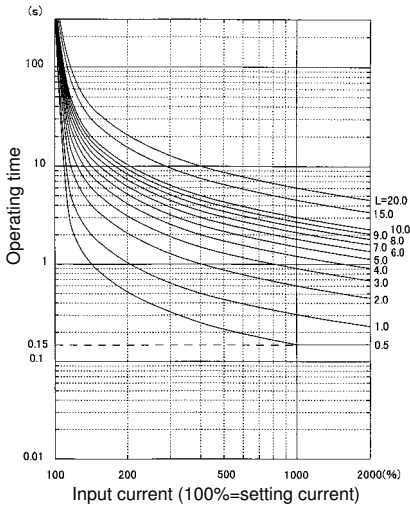

Note:
 Time setting (lever) is of 0.1 times step (Lower limit: 0.5, upper limit: 20.0). Indication of a part of the lever is omitted in the characteristics indicated above.

$$t = \frac{0.14}{I^{0.02} - 1} \times \frac{L}{10} \quad (L: \text{time magnification})$$


Very inverse (VI) characteristics

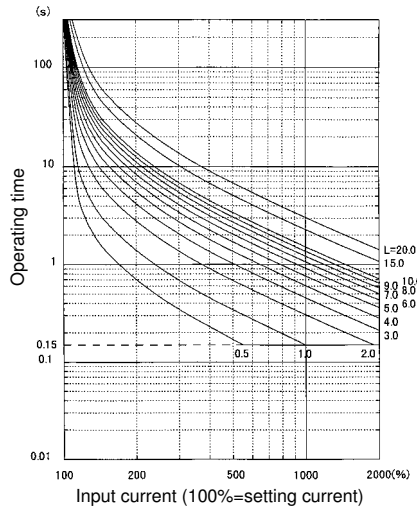

Note:
 Time setting (lever) is of 0.1 times step (Lower limit: 0.5, upper limit: 20.0). Indication of a part of the lever is omitted in the characteristics indicated above.

$$t = \frac{13.5}{I - 1} \times \frac{L}{10} \quad (L: \text{time magnification})$$


Very inverse (LT) characteristics

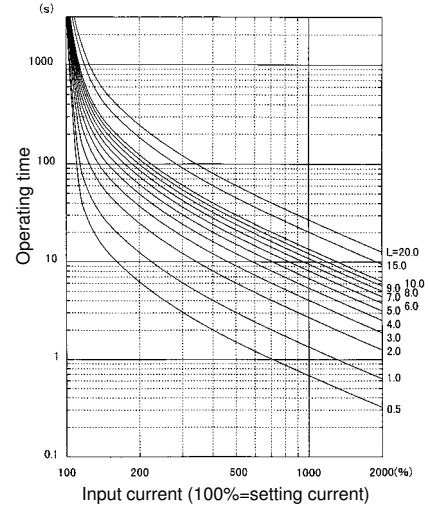

Note:
 Time setting (lever) is of 0.1 times step (Lower limit: 0.5, upper limit: 20.0). Indication of a part of the lever is omitted in the characteristics indicated above.

$$t = \frac{120}{I - 1} \times \frac{L}{10} \quad (L: \text{time magnification})$$


Extremely inverse (EI) characteristics

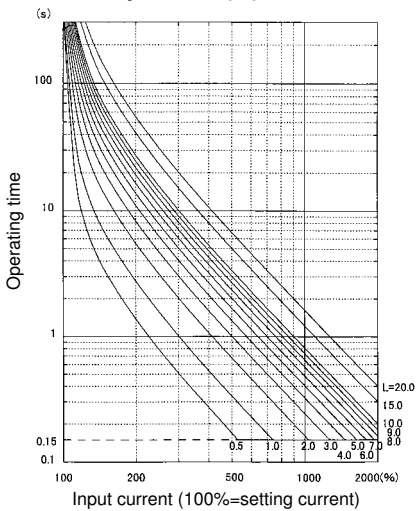

Note:
 Time setting (lever) is of 0.1 times step (Lower limit: 0.5, upper limit: 20.0). Indication of a part of the lever is omitted in the characteristics indicated above.

$$t = \frac{80}{I - 1} \times \frac{L}{10} \quad (L: \text{time magnification})$$


I²t characteristics

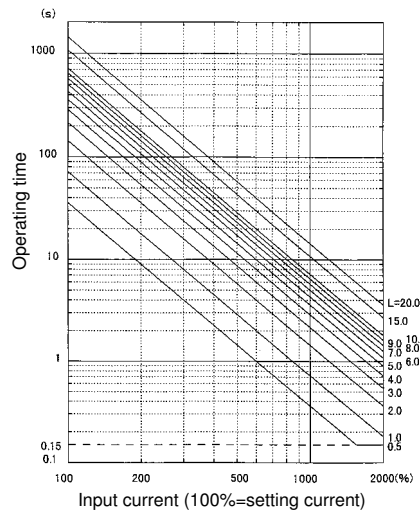

Note:
 Time setting (lever) is of 0.1 times step (Lower limit: 0.5, upper limit: 20.0). Indication of a part of the lever is omitted in the characteristics indicated above.

$$t = \frac{720}{I} \times \frac{L}{10} \quad (L: \text{time magnification})$$

■ Dimensions, mm

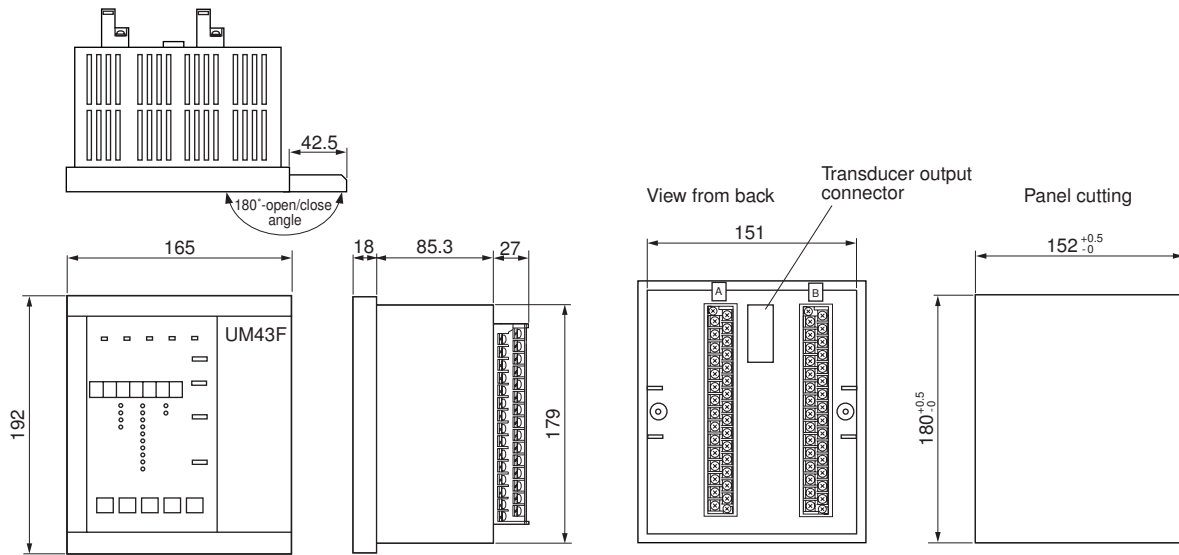

Minimum clearance from adjacent upper and lower devices or panel plate: 100mm

■ Characteristics of overcurrent relay (OCR)

The characteristics of overcurrent relays (OCR) are, in general, divided into the protective INST (50) (setting code 10, 11), the protective DT1 (setting code 12 to 14), protective DT2 (setting code 1c, 1d, 1E) and the protective OC 51 (setting code 15 to 18). The characteristics of protective OC 51 consist of 5 kinds

of inverse characteristic curves, such as standard inverse (SI) characteristics, very inverse (VI) characteristics, long time inverse (LT) characteristics, extremely inverse (EI) characteristics and I^2t characteristics). Combination of the protective INST (50), protective DT1, protective DT2 and OC 51 carries out coordinative protection.


Outline of characteristic of overcurrent relay

Item	Operating current	Operating time
Protective INST (50)	1 to 20 times of CT rated current 5A (0.2 times step)	Fixed (40ms or less)
Protective DT1		0 to 5s (0.05s step)
Protective DT2	20 to 240% of CT rated current 5A (2% step) *1	0 to 10s (0.1s step)
Protective OC (51)		Select from 5 characteristic curves. Time magnification: 0.5 to 20 times (0.1 times step)

*1: The operating time of protective OC51 is saturated at about 150ms.

The operating time will be saturated at 20 times of CT rated current when the setting exceeds 200%.

For example, the operating time becomes 833% (= 2000%/(240%×100)) of the CT rated current in 240% setting.

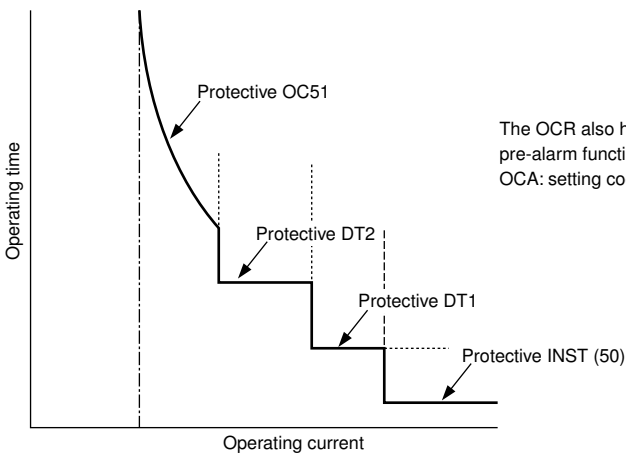

Multiple function protectors and controllers
F-MPC30 series, UM5ACG-H5R

■ **Description**

The F-MPC30 series is a multiple function protectors and controllers in the power monitoring equipment, which integrates protective, measurement, and transfer functions for power feeder facilities. Versatile functions such as preventive maintenance and history data and abnormal value recording can be achieved with excellent economy and reliability. These works have been very complicated as you must have used individual power monitoring devices in combination.

■ **Features**

Economical system configuration

Includes measurement and protective functions limited to the current ranges most frequently used, thus allowing the construction of economical systems.

Improved operating reliability

Includes an automatic monitor function, an automatic diagnostic function supported by continuous monitoring and automatic inspection, and a fail-safe function, thus ensuring high operating reliability while minimizing daily and regular inspection tasks.



Easily designed coordination protection

Provided with 51DT1 and 51DT2 definite time trip characteristics that simplify the designing of coordination protection between overcurrent relays.

RS-485 communications interface

Two protocol types are available:
MPC-Net protocol and MODBUS protocol.

■ **Specifications**

• **General specifications**

Type	UM5ACG-H5R
Control power supply	100/200V DC (80 to 286V DC) 100V AC (85 to 132V) common use
Control power consumption	Max. 15W (100/200V DC), Max 25 VA (100V AC)
Power consumption of CT, VT	Max. 1.0VA
Rated current (CT secondary current)	5A AC ("1A model" is also available (non-standard))
Zero-phase current	5A AC
Insulation resistance	10MΩ min. between ground and electric circuits connected together
Vibration resistance	16.7Hz, 0.4mm double amplitude, 1.96m/s ² , 10 minutes each in X, Y, and Z directions
Shock resistance	300m/s ² , three times each in X, Y, and Z directions
Withstand voltage	2kV AC 1 minute between ground and electric circuits connected together, excluding RS-485 signal lines
Noise resistance	JEC 2500 (conforming to ANSI), square wave, 1.5kV, 1ns/1μs, for 10 minutes
Overload resistance	CT circuit: at rating 40 times, a second, 2 times
Lightning impulse noise resistance	4.5kV (between ground and electrical circuits connected together)
Dropout tolerance	20ms (Operation continues, however, display goes out.)
Electrostatic discharge	Contact discharge: ±8kV, Aerial discharge: ±15kV
Ambient temperature	-10 to +60°C (operation guaranteed), 0 to +40°C (characteristic guaranteed) (no icing) *1
Storage temperature	-25 to +70°C (no icing)
Humidity	20 to 90%RH (no condensation)
Atmosphere	No corrosive gas and no heavy dirt and dust.
Grounding	Class D grounding (100Ω or less)
Applicable standard	JEC2500 (Protective relays for electric power systems), JEC-2510 (Overcurrent relays), JIS C4602 (Overcurrent relays for 6.6kV receiving), JIS C1102-1 to -9 (Direct acting analogue electrical instrument and their accessories), IEC255-3 (1989) -5, -6.
Mass	1.4kg

*1: The operation guaranteed temperature is a temperature at which operation is guaranteed within two times of the guaranteed accuracy value at JEC characteristics guaranteed temperature, or within the accuracy of influence of JIS temperature.

• Input/output specifications

Input circuit	100/200V DC (286V DC or less) common use Pick-up voltage: 40 to 70V DC (Input current; 1.2mA at 100V DC, 2.4mA at 200V DC)	
Output circuit	Circuit trip	The closing current: 15A (110V DC), 10A (220V DC), the allowable continuous conduction current: 4A
	Other than above	The switching current: 0.2A (110V DC, inductive load L/R = 15ms or less) The allowable continuous conduction current: 1A The making current: 0.1A (220V DC, inductive load L/R = 15ms or less) The allowable continuous conduction current: 1A

• Measurement and display specifications

	Effective measuring and display range	Accuracy *2
Current	0, 0.8% to CT rating to 8 × CT rating *1	±1.5% (0, 0.8 to 100%), ±5% (100 to 800%)
Zero-phase current	CT: 0, 2% to CT rating to 8 × CT rating	±1.5% (0, 2% to CT rating), ±5% (more than CT rating)

*1 The fault current up to 2000% (accuracy: ±5%) can be displayed.

*2 "0, a to n%" means that "0" is indicated if a value is less than a%.

• History data and display ranges

Item	Display range	Display code	Item	Display range	Display code
50 (INST) operation count	0 to 9999	H0	OCA operation count	0 to 9999	Hb
51DT1 operation count	0 to 9999	H1	Running time	0 to 9999 × 100 (h)	Hc
51 (OC) operation count	0 to 9999	H2	Close operation count	0 to 9999 × 10 (times)	Hd
51G operation count	0 to 9999	H3	OCGA operation count	0 to 9999	Hn
50G operation count	0 to 9999	H4	51DT2 operation count	0 to 9999	HP

* Other history display: Fault value display (on occurrence of a fault), history maximum values of zero-phase current/voltage, maximum demand value (A, W), and minimum instantaneous voltage

* The display codes are the codes to be displayed on this F-MPC30 (UM5ACG-H5R).

• Specifications of protective relays

	Setting range of current/voltage operatel value	Setting range of operate time (timer)	Characteristics (accuracy)	
			Operate value	Operate time
50 (Instantaneous)	1 to 20 times of CT rated current (in 0.2 times step), Lock	Fixed	±5%	40ms or less
51DT1 (Definite-time)	1 to 20 times of CT rated current (in 0.2 times step), Lock	0 to 5s (in 0.05s step)	±5%	Less than 1s ±50ms More than 1s ±5%
51DT2 (Definite-time)	20 to 240% of CT rated current (in 2% step), Lock	0 to 10s (in 0.1s step)	±5%	Less than 1s ±50ms More than 1s ±5%
51 (Inverse time) SI, EI, VI, LT	20 to 240% of CT rated current (in 2% step), Lock	Time multiplication: 0.5 to 20 times (in 0.1 times step) (Min. operation time: 150ms)	±5%	Setting value 300%: ±12% 500, 1000%: ±7% (lower limit ±100ms)
50G, 50N (Instant/definite time)	0.1 to 8 times of CT rated current (in 0.1 times step), Lock	0.0 to 10s to 180s (in 0.1s step) (in 1s step) *1 *2	±5%	±5% (lower limit ±50ms)
51G, 51N SI, EI, VI, LT	0.02 to 1.00 times of CT rated current (in 0.01 times step), Lock	Time multiplication: 0.5 to 20 times (in 0.1 times step) (Min. operation time: 150ms)*1	±5% (min. ±100mA)	Setting value 300%: ±12% 500, 1000%: ±7% (lower limit ±100ms)
OCA (Overcurrent pre-alarm)	10 to 100% of CT rated current (in 5% step), Lock	10 to 200s (in 10s step)	±10% (min. ±100mA)	±5%
OCGA (Leakage current pre-alarm)	50, 60, 70, 80% of the setting value of "51G operating current", Lock	10 to 200s (in 10s step)	±10% (min. ±200mA)	±5%

Notes: *1 When a current exceeds 15% of the rated fundamental wave current, the malfunction preventive function against the exciting inrush current activates. (When the contents of the second higher harmonics are about 15% or higher, the feature will lock outputs.) Note that with the 50G relay, the malfunction preventive function against the exciting inrush current will not activate if you set the operate time at 0s.

Power Monitoring Equipment
Multiple function protectors and controllers
F-MPC30




MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

• **Communications specifications**


Protocol	MODBUS protocol mode	MPC-Net mode
Standard	EIA-485	EIA-485
Data exchange method	Polling/selecting system	1: N polling/selecting system
Transmission distance	1000m (total length)	1000m (total length)
No. of connectable units	Up to 32 units (including master unit)	Up to 32 units (including master unit)
Station number address	01 to 99	01 to 99
Transmission speed	4800/9600/19200 bps (selectable)	4800/9600/19200 bps (selectable)
Data format	Number of start bits: 1 (fixed) Data length: 8 bits (fixed) Parity bit: None/even/odd (selectable) Stop bits: 1 bit or 2 bit (automatic selection) 1 bit: for "even or odd" parity 2 bit: for "none" parity	Number of start bits: 1 (fixed) Data length: 7/8 bits (selectable) Parity bit: None/even/odd (selectable) Stop bits: 1 (fixed) BCC: Even horizontal parity

■ **Type number nomenclature**

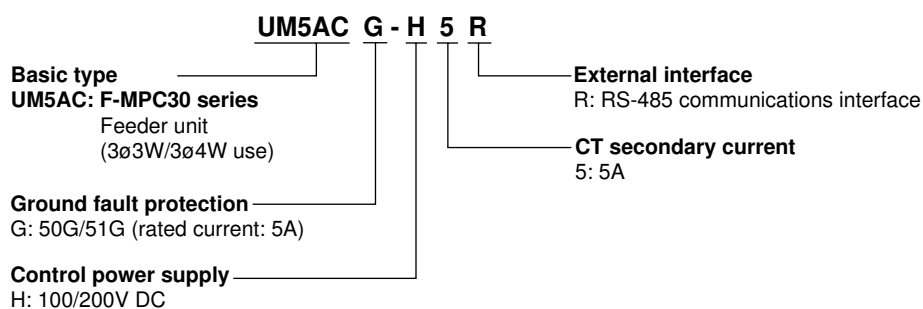


■ Example of external wiring diagram (External 3 CTs)



3-phase, 4-wire system / zero-phase current



3-phase, 4-wire system / currents of phase A, B, and C synthesized with N-phase current



3-phase, 4-wire system / N-phase dedicated CT connection

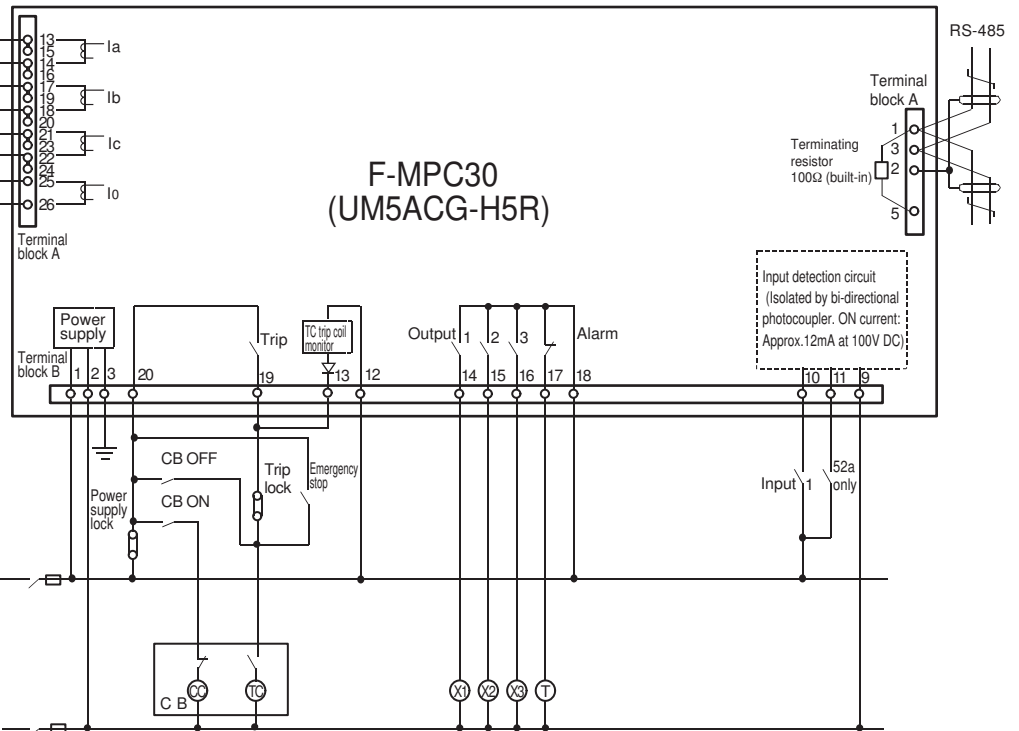


The output of X1, X2, and X3 are used for alarm display or trip display.

Note: When used with DC power supply, connect the input common terminals (terminal No.9 on terminal block B) to the N side.

- Note:
- Use selective input 1 and selective output 1 to 3 by selecting the function type by setup. See page 09/113 for details.
 - Outputs of "TRIP and device error" are used exclusively. Inputs of "52a: the answer back signal of CB ON" and "the monitoring of TC coil" are used exclusively.
 - Device error output is a normally closed contact (normally excited, and if an error occurs, excitation terminates and contact opens). Therefore, a time delay of about 100ms occurs before the contact opens, since the power has been on (in operation). Consider the use of a timer, if necessary, if you create an external sequence.
 - If you have to connect a heavy load exceeding relay's contact rating, be sure to use it in combination with FUJI's miniature power relay HH6□. See page 09/113 "Input/output specifications."
 - If this unit, being provided with RS-485 communication function, is located at the termination of a communication line, connect terminals No.3 and 5. With this, the 100Ω terminating resistor is connected across the RS-485 bus.

■ Time-current characteristics of an overcurrent relay


Standard inverse (SI) characteristics

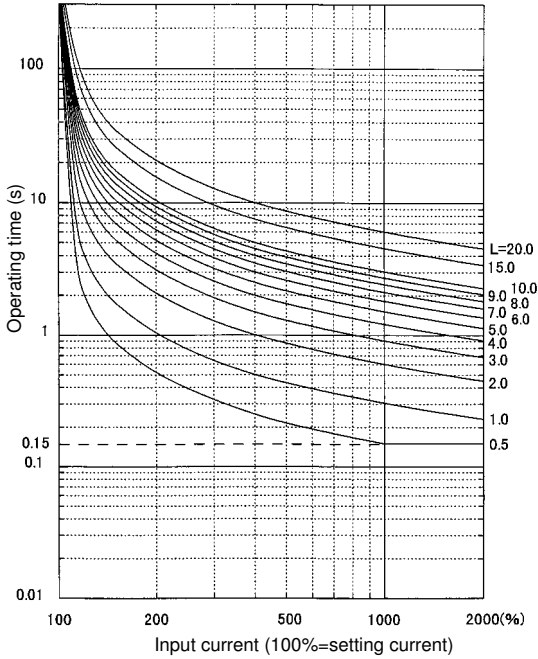

Note:
 Time setting (lever) is of 0.1 times step (Lower limit: 0.5, upper limit: 20.0). Indication of a part of the lever is omitted in the characteristics indicated above.

$$t = \frac{0.14}{I^{0.02} - 1} \times \frac{L}{10} \quad (L: \text{Time magnification})$$


Very inverse (VI) characteristics

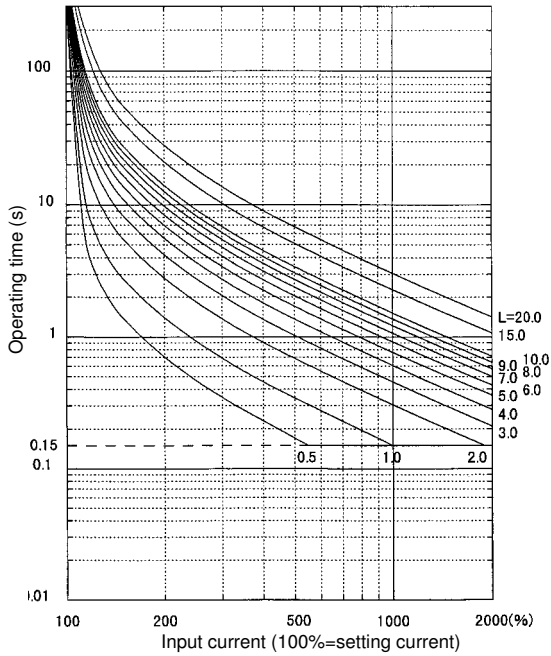

Note:
 Time setting (lever) is of 0.1 times step (Lower limit: 0.5, upper limit: 20.0). Indication of a part of the lever is omitted in the characteristics indicated above.

$$t = \frac{13.5}{I - 1} \times \frac{L}{10} \quad (L: \text{Time magnification})$$


Long time inverse (LT) characteristics

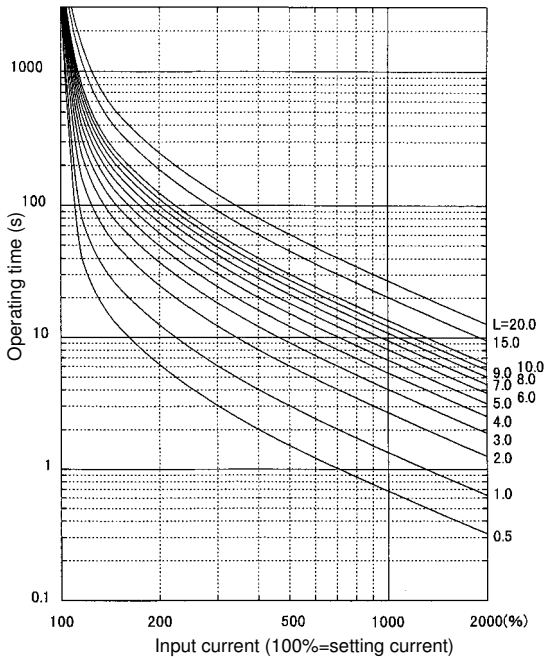

Note:
 Time setting (lever) is of 0.1 times step (Lower limit: 0.5, upper limit: 20.0). Indication of a part of the lever is omitted in the characteristics indicated above.

$$t = \frac{120}{I - 1} \times \frac{L}{10} \quad (L: \text{Time magnification})$$


Extremely inverse (EI) characteristics

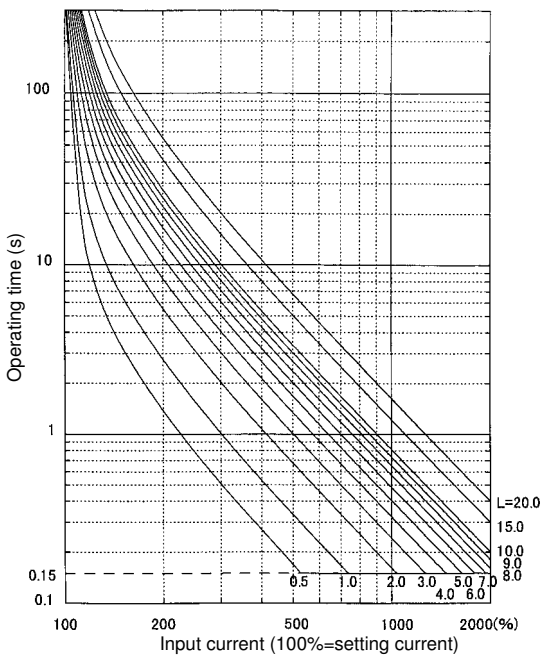

Note:
 Time setting (lever) is of 0.1 times step (Lower limit: 0.5, upper limit: 20.0). Indication of a part of the lever is omitted in the characteristics indicated above.

$$t = \frac{80}{I^2 - 1} \times \frac{L}{10} \quad (L: \text{Time magnification})$$

■ Dimensions, mm

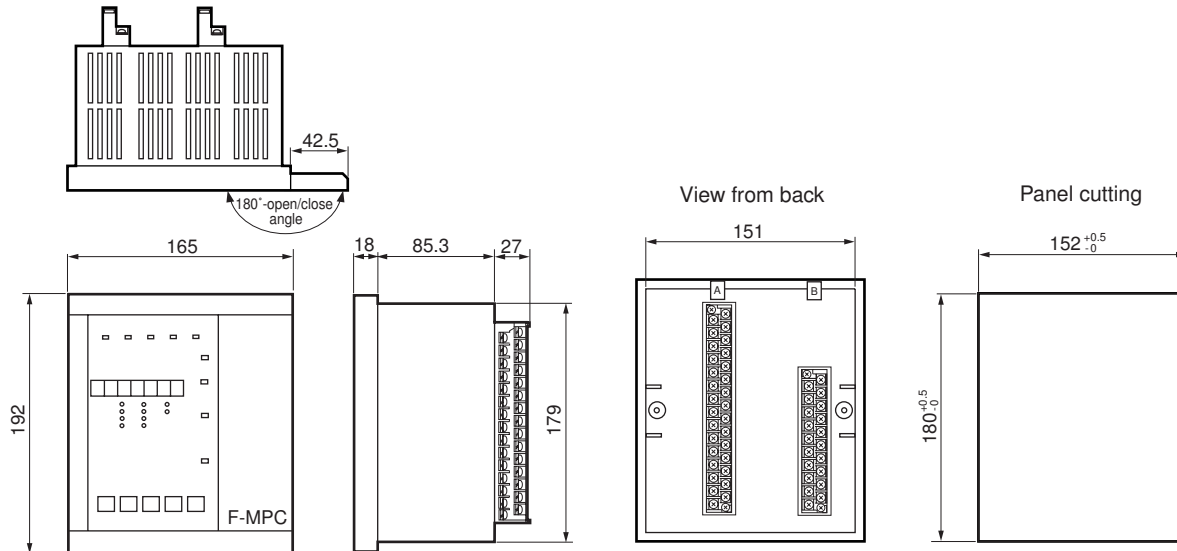

Minimum clearance from adjacent upper and lower devices or panel plate: 100mm

■ Characteristics of overcurrent relay (OCR)

The characteristics of overcurrent relays (OCR) are, in general, divided into the protective INST (50) (setting code 10, 11), the protective DT1 (setting code 12 to 14), protective DT2 (setting code 1c, 1d, 1E) and the protective OC 51 (setting code 15 to 18). The characteristics of protective OC 51 consist of 4 kinds of inverse characteristic curves, such as standard inverse (SI)

characteristics, very inverse (VI) characteristics, long time inverse (LT) characteristics, extremely inverse (EI) characteristics. Combination of the protective INST (50), protective DT1, protective DT2 and OC 51 carries out coordinative protection.


Outline of characteristic of overcurrent relay.

Item	Operating current	Operating time
Protective INST (50)	1 to 20 times of CT rated current 5A (0.2 times step)	Fixed (40ms or less)
Protective DT1		0 to 5s (0.05s step)
Protective DT2	20 to 240% of CT rated current 5A (2% step) *1	0 to 10s (0.1s step)
Protective OC (51)		Select from 4 characteristic curves. Time magnification: 0.5 to 20 times (0.1 times step)

*1: The operating time of protective OC 51 is saturated at about 150ms.

The operating time will be saturated at 20 times of CT rated current when the setting exceeds 200%.

For example, the operating time becomes 833% (= 2000%/(240%×100)) of the CT rated current in 240% setting.

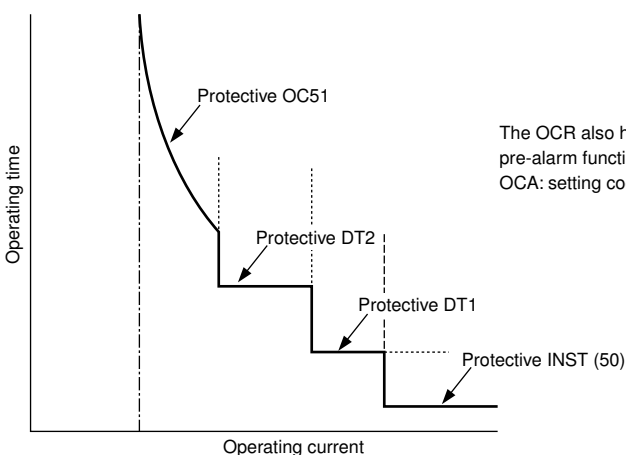


The OCR also has the pre-alarm function (protective OCA: setting code 19-1b).

Power monitoring unit F-MPC04 series

■ **Description**


- F-MPC04 series power monitoring equipment, designed for used in low voltage circuits, can perform electric power management and monitoring from high to low voltage circuit efficiently and economically, used together with F-MPC60B and F-MPC30 series.
- F-MPC04 series consists of 3 types: type UM04 integrated power monitoring unit that can monitors up to 10 feeders, type UM02 multi-circuit power monitoring unit that is space-saving and can monitor up to 8 feeders in three-phase three-wire system, and type UM03 single circuit power monitoring unit, being compact, that has optimum output functions for preventive maintenance, and is best suited for installation in a unit of facility, section, and floor.
- RS-485 communications interface is standard. With our application software of F-MPC-Net power monitoring system, you can automatically display, print, and save the data measured by F-MPC 04 on your PC.

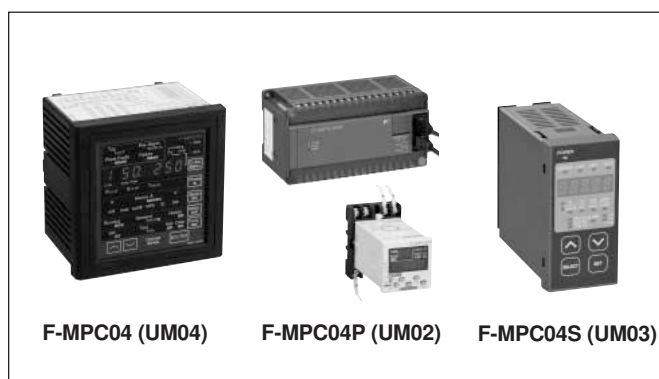

Type		F-MPC04		F-MPC04P			F-MPC04S	
		UM04-ARAE	UM02-AR2	UM02-AR3	UM02-AR4	UM03-ARA3G	UM03-ARA3	
		Integrated power monitoring unit	Multi-circuit power monitoring unit			Single-circuit power monitoring unit		
Measuring function	No. of phase and wire	1-phase 2-wire	10 circuits	12 circuits	—	—	1 circuit	1 circuit
		1-phase 3-wire	10 circuits	—	8 circuits	—		
		3-phase 3-wire						
		3-phase 4-wire	6 circuits	—	—	4 circuits	—	—
	No. of voltage circuit		2	1			1	1
	Measuring item	Voltage [V]	○			○	○	○
		Current [A]	○			○	○	○
		Power [W]	○			○	○	○
		Active power [Wh]	○			○	○	○
		Reactive power [var]	○			○	○	○
		Reactive energy [varh]	○		—	○	○	○
		Power-factor	○			○	○	○
		Leakage current [Io]	○			—	○	—
	Maintenance item	Demand	Current	○		—	○	○
			Power	○		—	○	○
Max. current			○		—	○	○	
Max. power			○		○	○	○	
Max. voltage value		○			○	—	—	
Min. voltage value		○			○	—	—	
Harmonic current		○			—	○ (Demand only)		
Protection	Current prealarm (OCA)	○			—	○	○	
	Leakage current prealarm (OCGA)	○			—	○	—	
	Leakage current trip (OCG)	○			—	○	—	
Communications interface		RS-485, Modbus	RS-485			RS-485	RS-485	
Display and setting		○	Display and setting unit UM02X-S			○	○	
Devices to be connected	Current sensor (Current Transformer:CT)	○ *1	CT: 5, 50, 200, 400A					
	ZCT (separately installed)	○			—	○	—	
	MCCB with ZCT	○			—	○	—	

Note *1: FMPC 04 (UM04) is connected to CT via CT-BOX. For combination of F-MPC04 (UM04), CT-BOX and CT, See page 09/120 and 09/135 ; "Applicable CT."

■ System configuration example
Low voltage

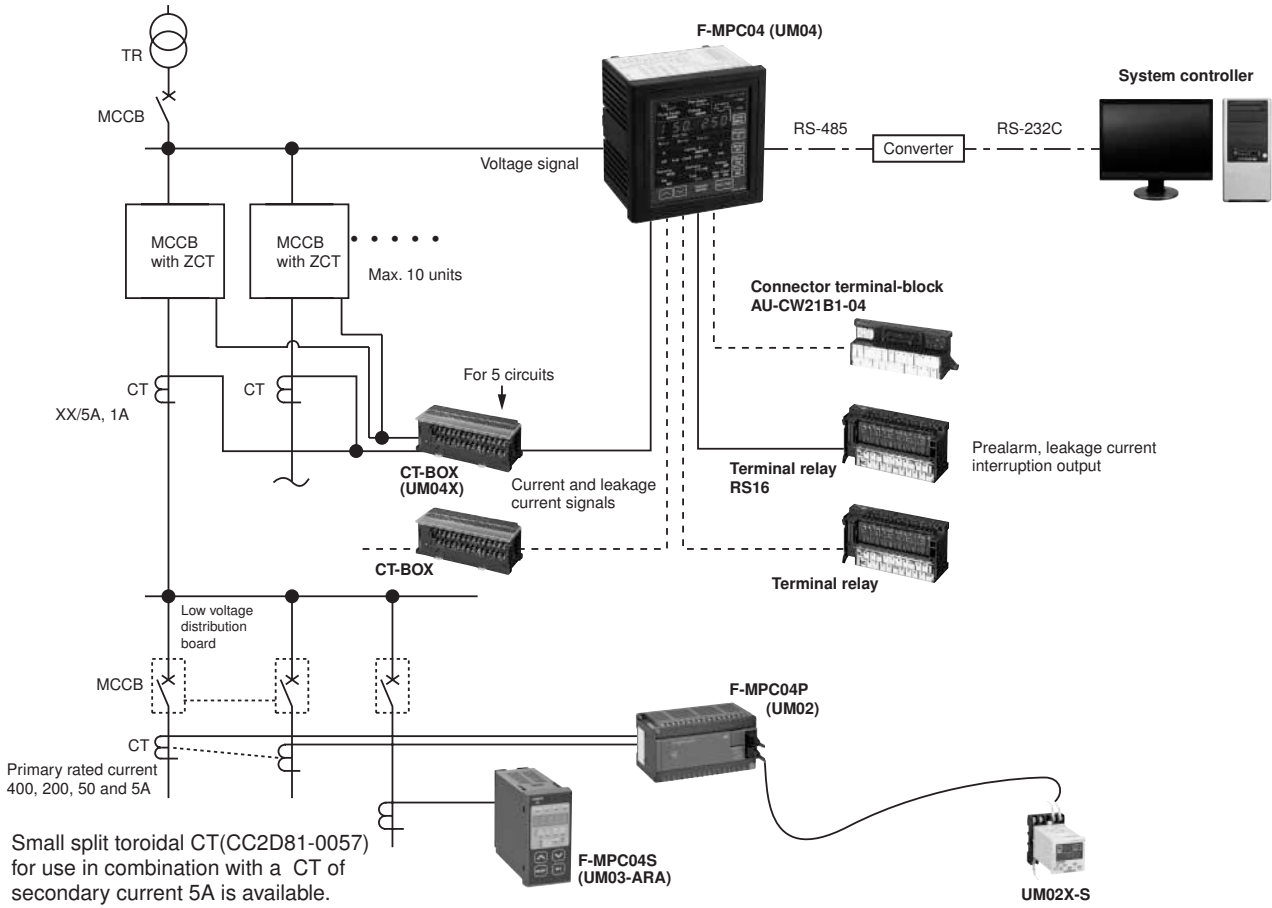


Integrated power monitoring unit, UM04

■ **Description**

Integrating complete functions required for power distribution and power line data management in a single unit (up to 10 circuits for 3-phase 3-wire system)

- Supports multiple power distribution lines
 UM04 allows economical management of each facility and installation by means of communications interface.
- Easy mounting to existing switchboards
 Split-through type CTs enables UM04 s easy mounting to existing boards.
- Flexible energy management
 UM04 manages power line data such as measurement, preventive maintenance, maintenance and electricity quality, and transmit those data to upper level controller, thus promises energy and labor-saving.
- Harmonics current measurement
 The third, fifth, seventh, and total harmonic current can be measured.
- Monitor insulation deterioration and implement preventive maintenance by measuring leakage current.
 Provides deterioration trend analysis with trend data and preventive maintenance with 2-stage output (leakage current pre-alarm and leakage current relays).
- Compatible with MODBUS RTU protocol.
 Select between the MODBUSRTU protocol or the F-MPC-Net protocol for the F-MPC series.

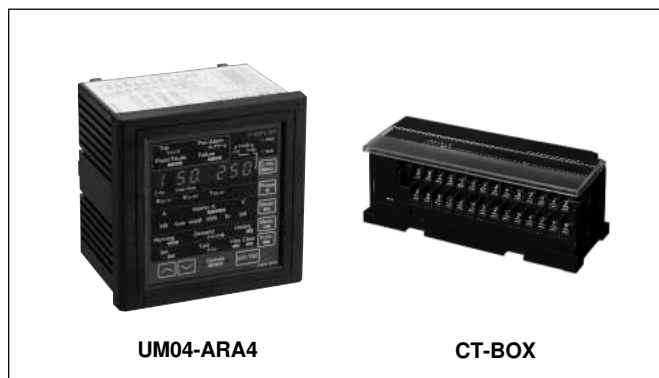

- Handles digital input.
 Four inputs (ON/OFF status and pulse count digital signals) from the relay connector terminal block.
- Related Equipment
 Molded case circuit breakers with ZCT and split type current transformers are also introduced as related products, RS16 Terminal Relay which outputs leakage current prealarm and the connector terminal-block which outputs kWh pulse, are also explained (UM04 use only).

■ **Type number nomenclature**

Integrated power monitoring unit



■ **Types**

Description	Specification	Type	Remarks
Integrated power monitoring unit	RS-485, 2VT-conformed	UM04-ARA4	
CT-BOX	For CT secondary current 5A	UM04X-5	
	For CT secondary current 1A	UM04X-1	
Related product			
Terminal Relay	15 output	RS16-DE04H	See page 09/137.
Connector cable	Length 1m/2m/3m	AUX014-20□	See page 09/137.
Connector terminal block	kWh pulse output For digital input	AU-CW21B1-04	See page 09/138.

■ **Applicable CT**

Current transformer (CT)	CT secondary current	Applicable CT-BOX	Applicable integrated power monitoring unit
Split CT Type CC2C76-□□□1 Type CC2D74-□□□1	1A	UM04X-1	UM04-ARA4
General-purpose CT XX/1A	1A		
General-purpose CT XX/5A	5A	UM04X-5	

Applicable circuit	CT-BOX	
	One unit	Two units
Three-phase/3-wire	5 feeders max.	10 feeders max.
Single-phase/2-wire		
Single-phase/3-wire		
Three-phase/4-wire	3 feeders max.	6 feeders max.

* The number of countable feeders depends on the number of CT boxes.

■ Specifications

• General specifications

Item	Specification	
Rating	Rated frequency	50 or 60Hz (Selectable by the setting)
	Rated voltage	Applicable to both 110V and 220V AC, 110V AC for use with a VT secondary circuit
	Rated current	Depends on CT-BOX specifications (5A, 1A in a CT secondary circuit, power consumption: 0.1VA max., excluding power loss in the external cable resistance)
	Zero-phase CT	EW type or MCCB with a ZCT (zero-phase current transformer) type (FUJI model)
Control power supply	85 to 264V AC (By exclusive control power supply terminal)	
Inrush current	40A max., 3ms max. (AC) 85A max., 3ms max. (DC)	
Control power consumption *1	25VA max. (Power monitoring unit + two CT-BOXes + Terminal Relays with all contacts ON)	
Rated input	Voltage input (VT ratio)	100V direct input, 200V direct input VT primary/secondary : AC220/110V, AC440/110V, AC440/220V, AC240/110V, AC400/110V, AC3.3k/110V, AC6.6k/110V
	Current input (CT ratio)	Primary rating setting : 10A, 15A, 20A, 25A, 30A, 40A, 50A, 60A, 75A, 80A, 100A, 120A, 150A, 160A, 200A, 250A, 300A, 320A, 400A, 500A, 600A, 630A, 750A, 800A, 100A, 1200A, 1250A, 1500A, 1600A, 2000A, 2500A, 3000A, 3150A, 3200A, 4000A, 5000A, 6000A, 7500A
Ambient temperature	-10 to + 55°C (no icing or no condensation)	
Storage temperature	-20 to + 70°C (no icing or no condensation)	
Humidity	20 to 90% RH (no condensation)	
Atmosphere	No corrosive gas and no heavy dirt and dust	
Alarm and shutdown outputs	Continuous output current: 1A max. (with output of terminal relay, RS16-DE04H) Make and break current: 250V AC 5A, 30V DC 5A max.	
Insulation resistance	10MΩ min.: between ground and electric circuits connected together 5MΩ min.: between electric circuits, between contacts	
Dielectric strength	2000V AC, 1 minute between ground and electric circuits connected together, excluding T-link and RS-485 signal circuits	
Impulse	4.5kV (1.2 × 50μs) between ground and electric circuits connected together, excluding T-link and RS-485 signal circuits	
Momentary overload capability	20 times rated current, nine times for 0.5s, once for 2s	
Shock resistance	Approx. 300m/s ² , three times in each of X, Y, and Z axes	
Noise immunity	1 to 1.5MHz damped oscillation noise having 2.5 to 3kV peak voltage for 2s 1.5kV square wave (rise time: 1ns, pulse width: 1μs) for 10 minutes continuously	
Vibration resistance	JIS C 60068-2-6 10-58Hz: single amplitude 0.075mm. 58-150Hz=constant acceleration 10m/s ² X, Y, Z directions 8minutes X10 cycles	
Electrostatic noise resistance	Mounting steel panel surface: ± 8kV F-MPC04 (UM04) front panel surface: ± 15kV	
Permissible momentary power failure	20ms, continuous operation (excluding display)	
Mass	Power monitoring unit UM01: 1000g, CT-BOX: 300g Terminal relay: 200g	

Note *1 The control power consumption on the table applies to where CT-BOXes and Terminal relays are connected to the power monitoring unit UM04.

• Measurement and display specifications


Measurement type	Effective measuring range	The main body display	Communication data	Accuracy (%)	Remarks
Current: I(r), I(s), I(t)	0, 0.5% to 150% of CT secondary rated current	4 digits	4 digits	±2.5% FS	"0.00" is displayed, if the measured value is about 1.0% or less.
Voltage: *3 V(uv), V(vw), V(wu)	VT secondary voltage: 3Ø3W : max 264V 3Ø4W (Phase voltage): max.264V 3Ø4W (Line voltage): $\sqrt{3} \times 264V$			±2.5% FS	VT secondary voltage is jointly used as internal control power supply. (For U-V)
Zero-phase current I0	0, 50 to 3600mA			±20% FS	"0" is displayed, if the measured value is about 50mA or less.
Active power *4*5	0 to 3.5kW (220V) as converted to current transformer secondary value	4 digits with the code	4 digits with the code	±2.5% FS	Two-wattmeter method: Measured when the value is 0.4% or higher of the rated current. (Ir, It, Vuv, Vvw)
Reactive power *4*5	0 to 3.5kvar (220V) as converted to current transformer secondary value			±2.5% FS	Two-wattmeter method
Power factor *4	Lead : 0%-100%-Lag : 0%	3 digits with the code	4 digits with the code	±5% The "90°" phase angle conversion	
Active electric power	0 to 99999 (kWh) The effective power quantity of the plus	5 digits	*6	Equivalent to ordinary class specified in JIS	±2.0% (Power factor of 1 between 5% and 120% of CT primary rated current)
	0 to 99999 (kWh) The effective power quantity of the minus				±2.5% (Power factor of 0.5 between 10% and 120% of CT primary rated current)
The reactive energy	0 to 9999 (kvar) The reactive energy of the plus	none	*6	±0.5% (No display)	
	0 to 9999 (kvar) The reactive energy of the minus				
The voltage minimum value	"264V from 85V" in VT secondary of each phase	4 digits		±2.5% FS	
The voltage maximum value	"264V from 85V" in VT secondary of maximum-phase			±2.5% FS	
Harmonic current	3rd & 5th order : 0, 2.5% to 150% 7th order : 0, 5.0% to 150%			±2.5% (7th order: ±5%)	*7

- Note : *1. The measurement accuracy includes the error in the CT boxes and ZCT. The error in the combined VTs and CTs are not included.
 *2. Current, voltage, and power performance characteristics are according to JIS C 1102 (indicating electrical measuring instruments). The measurement display value is the average value over approximately 1 second.
 *3. The values in the table are the line voltages for 3-phase, 3-wire systems and the phase voltages for 3-phase, 4-wire systems. For 3-phase, 4-wire applications, the setting in this table can be used to display either the phase voltages or line voltages.
 *4. Selling/purchasing for power measurement and lead/lag for power factor measurements are displayed with one sign (blank for positive). The meaning of positive/negative for each measurement item is given below.
 *5. The maximum values of the active power and reactive power are ±3.5kW at a 5A secondary current for 3-phase, 3-wire systems, ±0.69kW at 1A for 3-phase, 3-wire systems, ±6.0kW at a 5A secondary current for 3-phase, 4-wire systems, and ±1.2kW at a 1A secondary current for 3-phase, 4-wire systems.
 *6. For the F-MPC-Net protocol, the lower four digits of the display are sent. For the MODBUS RTU protocol, 0 to 999999.999kWh is sent and the step value for the total countup depends on the VT ratio and CT ratio.
 *7. For 3-phase, 3-wire systems, the harmonic currents for phases R and T are measured. For 3-phase, 4-wire systems, the harmonic currents for phases R, S, and T are measured.

The sign "±" in electric measuring

The sign "±" is used to display "LEAD/LAG" in power-factor, measuring and "electric power selling/purchase" in electric power measuring. No signs are used if a value is "+". The sign "±" has the following meanings depending on the measured items.

- Active power: kW
 - +: Power purchase (Consumed electric power)
 - : Electric power selling (Inverse electric power flow)
- Reactive power: kvar
 - +: Lagging current by reactive volt-ampere meter method
 - : Leading current by reactive volt-ampere meter method
 - * "LEAD/LAG" reverses with electric power selling/purchase.
- Power factor: COSφ
 - +: LEAD -: LAG

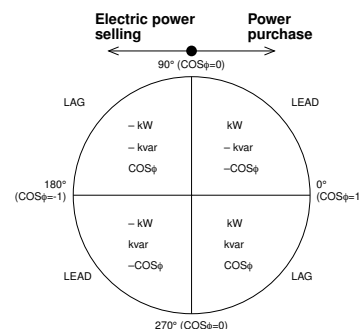

• Demand measurement

Item	Specification
Current (I(r), I(s), I(t)) Effective power Zero-phase current (rms:lo, 50/60Hz:lob) Harmonics currents, voltage	Time: Select one from 0, 1 to 15 minutes (1 minute increments) and 30 minutes it at the initial setting (common to all 10 circuits). Display item: 1. Demand values 2. Maximum demands (maximum values recorded before the last reset operation)

● Specifications of a leakage current relay

Sensitive current

Setting value	200/500/1000/2000/3000mA or Lock (lo or lob selectable)
Operating Level	50 to 100% of setting value (Operate at less than 50%, no operate at 100%)

Operation time characteristics

Setting time	Inertia non-operating time	Operating time
0.1s	–	100ms max.
0.3s	150ms min.	0.3s max.
0.5s	250ms min.	0.5s max.
1.0s	500ms min.	1.0s max.
3.0s	1,500ms min.	3.0s max.

Note: • Sensitive current and operation time can be set by an arbitrary combination.

• The values on the table is for a trip relay's specifications. The pre-alarm relay operates at half the operating level on the table, and its operation time is 10s fixed. The pre-alarm relay can be used as an alarm against leakage current increase in case of cable insulation deterioration or flood.

● Data display at fault occurrence

Pre-alarm of load current, pre-alarm of leakage current relay (auto-reset), maximum current indication at circuit interruption (indication reset by resetting)

● kWh-pulse-output specifications (for products with a kWh-pulse-output feature)

Transistor open collector output: 35V DC, 50mA max., (residual voltage at ON state: 2.5V max.)
Output pulse width: 200ms ±20ms
Output period: 1,000ms min.
Output pulse rate: 10ⁿ kWh/pulse, n = -2, -1, 0, 1, 2, or 3 (selected from VT and CT ratio.)

● ZCT with Leakage Current Relay

The UM04 can be used together with a MCCB with ZCT or a zero-phase current transformer.

■ Communications specifications

Item	Specifications	
	F-MPC-Net protocol *	MODBUS RTU protocol *
Standard	EIA-485	
Transmission method	Half duplex, 2-wire	
Data exchange method	1:N (UM04) polling/selecting	
Transmission distance	1,000m (total length)	
Number of stations	31 max. per system (excluding master)	
Transmission speed	4,800/9,600/19,200bps (selectable)	
Address setting	1 to 99	
RS-485 terminal names	DXA, DXB	Connect DXA as D1(+) and DXB as D0(-).
Transmitted characters	ASCII	Binary
Data format	Start bits	1 bit (fixed)
	Data length	7 or 8 bits (selectable)
	Parity bit	None, even, or odd (selectable)
	Stop bits	1 bit (fixed)
	BCC	Even vertical parity
		Others: 1 bit (fixed)
		CRC-16


* The F-MPC-Net or MODBUS RTU protocol can be set for communications for the UM04.

■ Digital input specifications

Item	Specification	Remarks
Number of inputs	4	Communications transmissions and UM04 display of ON/OFF status and pulse count.
Exterior input signals	No-voltage contact input or transistor open-collector input	
Input specifications	24V DC, approx. 5mA flow OFF level: 1mA max.	
Minimum input signal width	50ms	

■ **System configuration**


With an integrated power monitoring unit UM04, you can easily construct a low-voltage power distribution system equipped with leakage current measuring, leakage current pre-alarm, and earth leakage circuit shutdown.

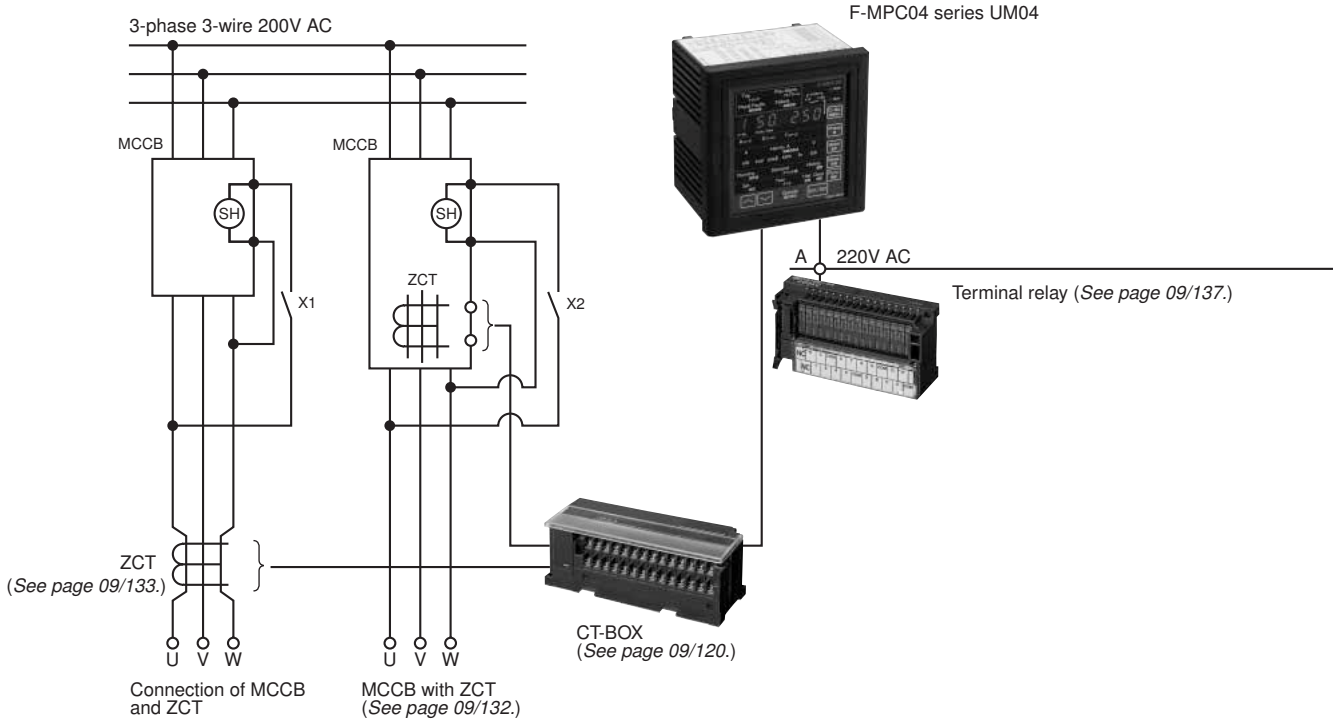

(SH) : Shunt trip device


■ **Dimensions, mm**

• **Integrated power monitoring unit, UM04**

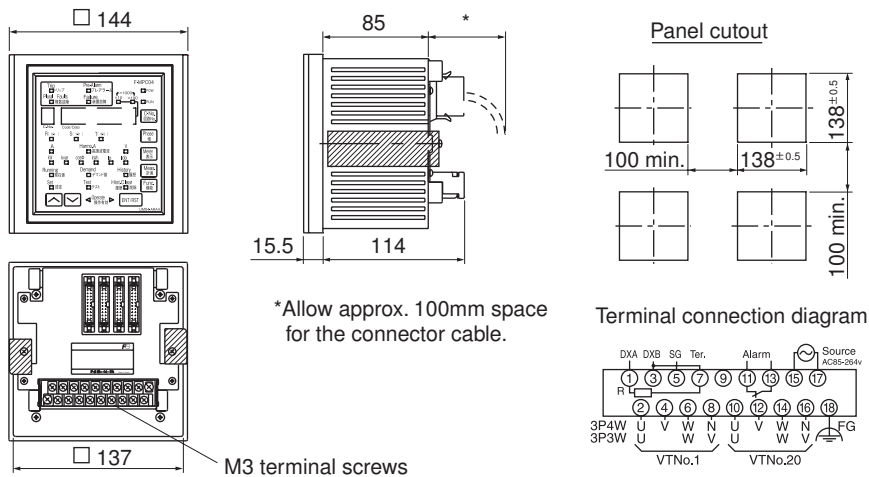

*Allow approx. 100mm space for the connector cable.

• **CT-BOX, UM04X**

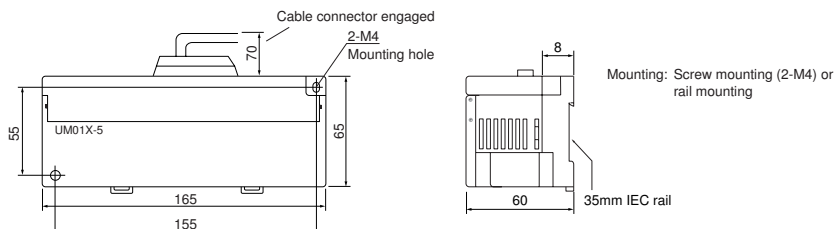


Multi-circuit power monitoring unit, UM02

■ Description

Integrating measuring functions required for power monitoring in one unit

- A single unit measures multiple circuits
 A single UM02 can measure up to 8 feeders in 3-phase 3-wire, 12 feeders in single-phase 2-wires and up to 4 feeders in 3-phase 4-wire circuit.
- Easy installation into existing switchboards
 Compact UM02 can be easily installed into on-site power distribution or lighting panel, irrespective of new panel or existing panel, to create power monitoring system economically.
- On-site measuring instrument
 UM02 can be used an on-site measuring instrument by combining with an optional display and setting unit UM02X-S.
- Communication interface
 As UM02 has an RS-485 communications interface as standard, it can communicate with other power monitoring equipment with RS-485

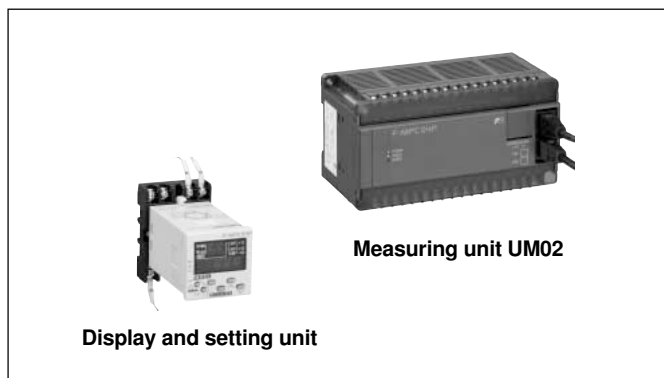

■ Type number nomenclature

Multi-circuit power monitoring unit (Measuring unit)

UM02-AR 3

Basic type

UM02-AR: Measuring unit

Applicable circuit

- 2: Single-phase 2-wire, up to 12 feeders
- 3: 3-phase 3-wire, Single-phase 3-wire, Single-phase 2-wire, up to 8 feeders
- 4: 3-phase 4-wire, up to 4 feeders

■ Type and applicable circuit

Description	Applicable circuit	Type
Measuring unit	Single-phase 2-wire, up to 12 feeders	UM02-AR2
	3-phase 3-wire, Single-phase 3-wire, Single-phase 2-wire, up to 8 feeders	UM02-AR3
	3-phase 4-wire, up to 4 feeders	UM02-AR4
Sold separately		
Display and setting unit	The TP48X socket and connecting cable are provided as accessories.	UM02X-S
Cable for UM02-AR connection	0.5m	UM02X-C005
	5m	UM02X-C050

■ Specifications F-MPC04P (UM02)

• General specifications

Item	Specification
Ratings	Voltage Direct input: 100 or 200V AC, 400V AC (AR4 only) VT primary/ secondary: 220, 440V AC, 3.3k, 6.6kV AC/110V AC, 440/220V AC *1
	Current Split CT: 5, 50, 200, 400A AC Small split current sensor CT: 5A AC (primary rated set range 10 to 7500A) *1
Control power supply	100/200V AC common use (85 to 264V AC) AR2: between terminals P1-N, AR3: between terminals U-V, AR4: between terminals P1-P2
Inrush current	15A max., 3ms max. (100V AC 50Hz) 30A max., 3ms max. (200V AC 50Hz)
Control power consumption	20VA or less (or approx. 15VA at 200V AC, 10VA at 100V AC)
Ambient temperature	Operating: -10 to 55°C (no icing or no condensation) Storage: -20 to 70°C (no icing or no condensation)
Humidity	20 to 90% RH (no condensation)
Atmosphere	Free from corrosive gases and excessive dusts or particles
Insulation resistance	10MΩ min. between electric circuits and ground
Dielectric strength	2000V AC, 1 minute (2500V AC, 1 minute for AR4) between control power circuits and ground
Lightning impulse noise resistance	4.5kV (1.2 × 50μs) between control power circuits and ground (6.0kV for AR4)
Momentary overload capability	20 times rated current, 9 times for 0.5s.
Vibration resistance	JIS C 60068-2-6 10 to 58Hz: single amplitude of 0.075mm, 58 to 150Hz, constant acceleration of 10m/s ² 8 minutes × 10 cycles in each of X, Y, and Z directions
Shock resistance	JIS C 60068-2-27 Half sine wave 300m/s ² , for 11 ms × 3 times in each of X, Y, and Z directions
Noise immunity	1.5kV square wave (rise time: 1ns, pulse width: 1μs) for 10minutes continuously
Permissible momentary power failure	20ms (continuous operation) except RS-485 communications
Mass	Measuring unit: Approx. 500g, Display and setting unit: Approx. 200g

Note *1 Make VT and CT ratio settings through the display and setting unit UM02X-S or from the host controller.

• Measurement specifications

Item	Effective measurement range	Display	Accuracy *1	
Current (N-phase current measured in AR4)	With split CT (200A and 400A AC) combined 0, 0.4% of In to 500A	4 digits	±1.5%	
Active power	With small split current sensor (50A AC) combined 0, 0.4% of In to 50A			
Reactive power *2	with small split current sensor (5A) combined *4	□. □□	±2.5% for S-phase current of AR3 and N-phase current of AR4	
Power-factor	0 to n times CT rating	□. □□	±5% (converted into a phase angle of 90°)	
Active electric energy *2		5 digits	Equivalent to JIS ordinary class *4	
Max. active power *3	Same as above. (with a demand time set to 0, 1, 5, 10, 15, or 30min.)	4 digits	±1.5%	
Min. voltage each phase *2	AR2, R3 85 to 264V (directly or VT secondary voltage conversion) The minimum and maximum voltage are average values for 0.3s.	AR4 Phase voltage 50 to 288V (directly or VT secondary voltage conversion) Line voltage 86 to 498V The minimum and maximum voltage are average values for 0.3s.	4 digits	±1.5%
Max. voltage *2			±1.5%	

Notes *1 Measurement accuracy does not include CT and current sensor.

*2 In measurement mode display is the number of digits of RS-485 communications data. The display and setting unit does not display communications data on reactive power, minimum voltage, and maximum voltage values.

*3 Max active power and active electric energy values can be reset by the display and setting unit and host controller. And, when VT ratio or CT ratio is changed, these are automatically reset.

*4 With 1-turn or 3-turn primary winding selected for the 5A small split current sensor, the lower limit of minute current measurement is selected as specified below.

Classification	Measurement and display range	Measurement lower limit (Electric energy starting current)	Accuracy	
			Current and power	Electric energy
1 turn	0, 2% to rating × 10	2% of rating	0 to rating: ±1.5% of rating	±2.5% (5% to 100% of rating, load power factor -0.8 to 1.0 to +0.8)
3 turns	0, 0.7% to rating × 3	0.7% of rating	Exceeding rating: ±1.5% (FS)	

Note: * Sampling interval/measurement display value (communication) of current and power, and sampling and integration intervals of electric energy are shown below. In the case of an intermittent load, such as a welding machine, accurate measurement may be disturbed and therefore the use of the single-circuit F-MPC04S (refer to page 118) is recommended.

• Sampling interval and display value

Type	Sampling interval/display value of current and power (Communication)	Sampling and cumulative interval of power
UM02-AR2	Approx. 0.2s / Average voltage for aprox. 1.5s	Approx. 0.2s
UM02-AR3	Approx. 0.2s / Average voltage for aprox. 1.5s	Approx. 0.2s
UM02-AR4	Approx. 0.1s / Average voltage for aprox. 0.4s	Approx. 0.1s

■ Display and setting unit UM02X-S, specifications

Item	Specification	Remarks
Control power supply	Supplied from the measuring unit UM02-AR	
Measuring unit UM02-AR communications specifications	EIA-485 (always 19200bps fixed)	
Number of connectable measuring unit UM02-AR	5 max.	UM02-AR2, AR3, AR4
Max. cable length between UM02-AR and UM02X-S	23m	Total length between UM02X-S and all UM02-ARs
Display item	Operating status, measurement value VT, CT setting value, fault	Selective indication by a switch
Setting	Voltage, current (CT), demand time, pulse multiplication rate, No. of turns of CT secondary winding, host controller communications mode (different communications interface)	UM02-AR incorporates a different RS-485 interface to communicate with a host controller.

Note : The display and setting unit UM02X-S provides a function to start initial communications to recognize the UM02-AR automatically when UM02X-S is turned on. If on-site indication is not necessary once the setting to the measuring unit UM02-AR is complete, UM02-AR fully operates even without UM02X-S.

■ Communications specifications

Item	Specification	
Standard	EIA-485	
Transmission system	2-wire half duplex	
Data exchange	1: N (F-MPC04P, UM02-AR) polling/selecting	
Transmission distance	1000m (total length)	
No. of connectable units	Max.32 (including master)	
Station number setting	01 to 99 (set with digital switch)	
Transmission characters	ASCII	
Transmission speed	4800, 9600, or 19200 bps (selectable)	
Data format	Number of start bits	1 (fixed)
	Data length	7 or 8 bits (selectable)
	Parity bit	None, even, or odd (selectable)
	Number of stop bits	1 (fixed)
	BCC	Even horizontal parity

Note : Use the display and set unit to change the transmission setting. The communications specifications cannot be changed through the host controller.

Power Monitoring Equipment


Power monitoring unit

F-MPC04P




MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br


- Dimensions, mm
- Measuring unit UM02-AR

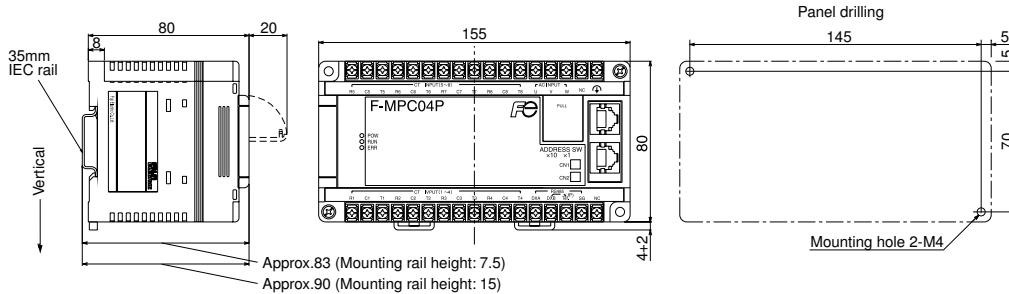

- Display and setting unit UM02X-S

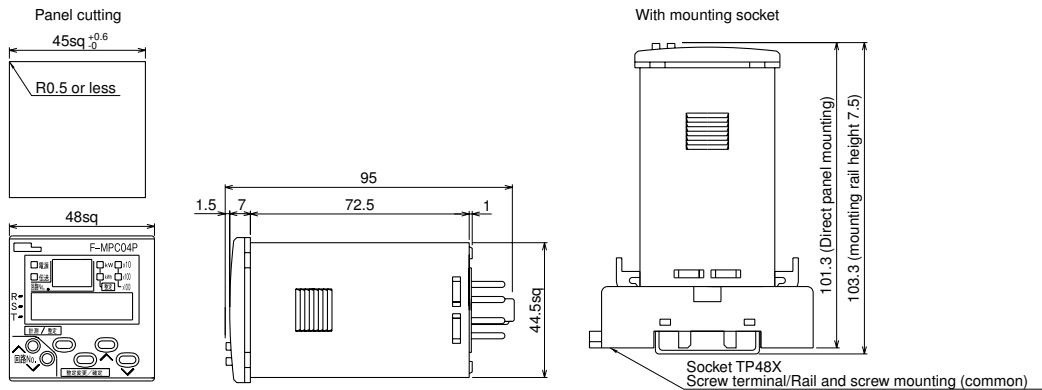

System configuration

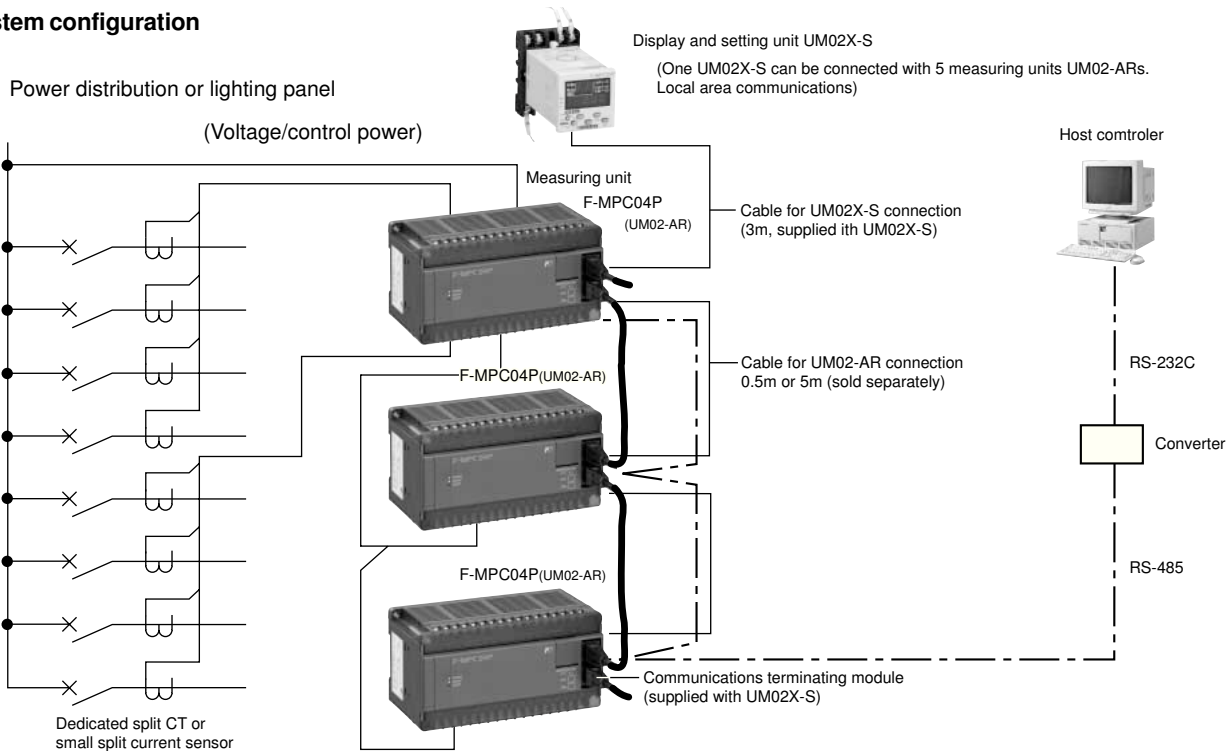

Note: * The display and setting unit UM02X-S is a local area communications master and can monitor and be able to set maximum five measuring units, UM02-ARs.

** Station address setting of measuring unit UM02-AR

Use a digital switch on the measuring unit to set a different station address (communication address to host controller).

In local area communication of the display and setting unit UM02X-S, the UM02X-S will automatically read out the address of the measuring units connected with cables for unit connection, and communicate with them.

Single circuit power monitoring unit, UM03

■ Description

Integrating measuring functions required for power monitoring in one unit

● Output functions for preventive maintenance selectable

- Power alarm/current prealarm
- kWh pulse output
- Leakage current alarm, leakage current prealarm output (model with leakage current measuring function) only

● Capable of measuring inrush current of welders

- High-speed sampling and calculation of voltage and current

● Compact design allows installation almost anywhere.

- Space-saving construction simplifies installation.
- Suited for monitoring individual equipment, section, and floor

● Networking capability

- RS-485 interface.
- Can be connected to power distribution system same way as the power monitoring equipment F-MPC 60B, 30, 04 (UM04, UM02) series products

■ Type numbers

Single circuit power monitoring unit		Type
Leakage current measuring function	Not provided	UM03-ARA3
	Provided	UM03-ARA3G

Note : As CTs, use type numbers CC2D81-0057, CC2D81-0506, CC2D65-2008, CC2D54-4009, CC2B65-2008, and CC2B54-4009. Refer to page 134. General-purpose CTs (secondary rated current 5A or 1A) cannot be connected directly. Use the general-purpose CT (5A) together with type number CC2D81-0057. Use dedicated ZCT as combination ZCT with the UM03-ARA3.


■ Specifications

• General specifications

Applicable circuit	Single circuit 3-phase 3-wire: 2-CT, single-phase 3-wire: 2-CT, single-phase 2-wire: 1-CT	
Control power supply	100 to 200V AC (85 to 264V AC) 50/60Hz (45 to 66Hz)	
Inrush current	15A, 3ms or less (at 110V AC, 50Hz) 30A, 3ms or less (at 220V AC, 50Hz)	
Control power consumption	Approx. 7VA (at 220V AC) Approx. 5VA (at 110V AC)	
VT consumed burden	Approx. 0.2VA	
Continuous overload capability	Current input circuit	110% of maximum setting value (150% of rated current), 2 hours
	Voltage input circuit	291V AC (1.1×264V AC), 2 hours
Short-time overload capability	Current input circuit	2000% of max. setting value (150% of rated current), 9 times for 0.5s
	Voltage input circuit	200% of max. setting value (264V AC), 9 times for 0.5s
Vibration	10 to 58Hz	0.075mm (one-way amplitude)
	58 to 150Hz:	constant acceleration 10m/s ² , 10 cycles for 8 min in each X, Y, and Z directions
Shock	300m/s ² , in each X, Y, and Z directions, 2 times	
Withstand voltage / Insulation resistance (500V DC megger)	2kV /10MΩ	Between power supply terminals connected together and other terminals connected together
	2kV /10MΩ	Between measurement input terminals connected together and other terminals connected together
	2kV /10MΩ	Between alarm output terminals connected together and other terminals connected together
	500V /10MΩ	Between watthour pulse output terminals connected together and other terminals connected together
Ambient temperature	-10 to +55°C	
Storage temperature	-20 to +70°C	
Humidity	20 to 90%RH (no condensation)	
Atmosphere	Free from corrosive gases and excessive of dusts	
Grounding	Type D ground (100 Ω or less)	
Allowable momentary power failure time	20ms (operation will continue)	
Altitude	2,000m or less	
Mass	Approx. 400g (main unit only, CT excluded)	



■ System configuration

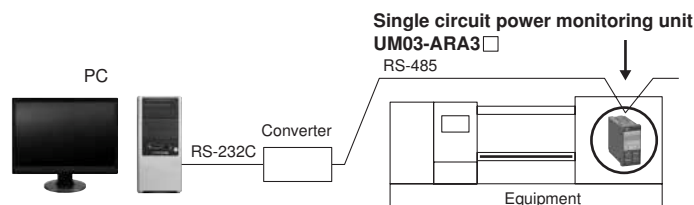

• **Measurement specifications**

Item	Effective measurement range	Display	Accuracy *1
Current (R/S/T), demand current Max. demand current value	• With CT (200A AC) 0, 0.4% of In (0.8A) to 300A	4-digit	±1.5%: R- and T-phase ±2.5%: S-phase
Demand value and max. demand value of total harmonic current *2	• With CT (400A AC) 0, 0.4% of In (1.6A) to 600A	4-digit	± 2.5%
Active power (±) Demand power Max. active demand power value	• With CT (5A) 0, 0.4% of In (0.2A) to 50A 0, to 1.5 times CT rating (for 5A)	4-digit	±1.5%
Reactive power (±)	(converted into CT secondary: 7.5A)	4-digit	±3%
Power factor (±)	(Max. display range: up to 9,999A)	3-digit	±5% (Converted into a phase angle of 90°)
Active electric energy (+only)	• Demand time setting: 0, 1 to 15min	5-digit	Equivalent to JIS ordinary class (pf: 0.5-1.0- -0.5)
Reactive electric energy (±absolute value addition)	(by 1min step) 30min setting: Available	5-digit	±5%
Voltage	Converted into an input voltage 60 to 264 V AC	4-digit	±1.5% ±2.5%: Vv-w
Frequency *3	45 to 66Hz *2	3-digit	±0.5%
Leakage current (Io/Iob) *4 Max. demand value	0, 10 to 1000mA	4-digit	±2.5%

Note: *1 The measurement accuracy is a value for FS (full span).

*2 The total harmonic current relates only to phase R and phase T. Only the demand value and max demand value are displayed. The current value is not displayed.

*3 If the frequency is out of the measurement range (lower than 45 Hz or higher than 66 Hz), 0.0 [Hz] is displayed.

*4 Measurement of leakage current is possible only with UM03-ARA3G.

• **Output specifications**

Item	UM03-ARA3	UM03-ARA3G	Specification
Watt-hour pulse output	Provided	Provided	Transistor open collector output 35V DC 100mA
Alarm output	Current prealarm (OCA), power alarm *	Provided	Replay output 250V AC 1A
	Leakage current prealarm (OCGA) (Io operation)	Not Provided	
	Leakage current alarm (OCG)	Not Provided	

Note: * Choose the current prealarm (OCA) output or power alarm by change of setting.

Watt-hour pulse output details

Output specifications	35V DC 100mA (residual 2.5V or less at ON)
Output pulse width	100ms±20ms
Output interval	200ms or more
Pulse multiplication rate	10 ⁿ kWh/pulse (n=-3 to 2 setup)

Alarm output details

	Setting range		Accuracy	
	Operate value	Time	Operate value	Time
Current prealarm (OCA) *1	I: 20 to 120% of rated value, Lock (5% step)	Depending on the demand time setting	±5% (rated min ±1.5%)	±10%
Power alarm *1	0 to 9999kW (1kW step)			
Leakage current alarm (OCG) (Io operation)	Operate current 100, 200, 500mA, Lock	0.1, 0.3, 0.5, 1.0s	75%±5% of setting value	75%±5% of setting value (min±25ms)
Leakage current prealarm (OCGA)	50±5mA 100 to 500mA (50mA step), Lock	0.1, 0.3, 0.5, 1.0, 10s or demand time *2	±5%	±5%


Note: *1 Select either the current pre-alarm output or the power alarm output through setup.

*2 When demand time is selected, the unit operates on Iob (leakage current only with fundamental wave).


■ **Communications specifications**

Item	Specification	Factory setting
Standard	EIA-485	—
Transmission system	2-wire half duplex	—
Data exchange	1: N polling/selecting	—
Transmission distance	1000m (total length)	—
No. of connectable units	max.32 (including master)	—
Station number setting	1 to 99	Without station number setup
Transmission characters	ASCII	—
Transmission speed	4800, 9600, or 19200 bps (selectable)	19200 bps
Data format	Number of start bits	1 (fixed)
	Data length	7 or 8 bits (selectable)
	Parity bit	None, even, or odd (selectable)
	Number of stop bits	1 (fixed)
	BCC	Even horizontal parity

■ **Front panel**

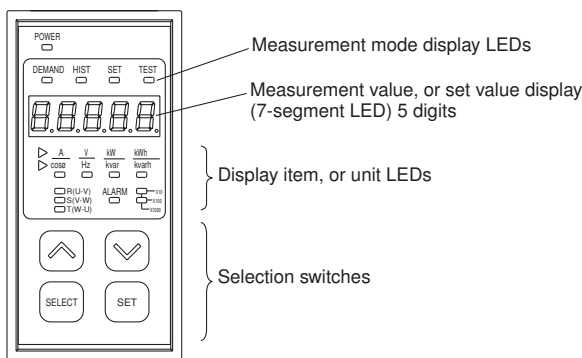


• **Terminal layout**

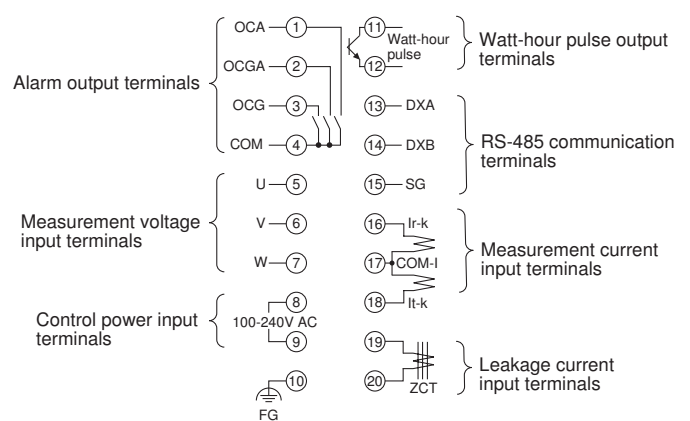


Note: Alarm output terminal ② ③ and ZCT input terminal ⑲ ⑳ of the UM03-ARA3 (without leakage current measuring function) are NC terminals. Do not connect anything to these terminals.

■ **Dimensions, mm**

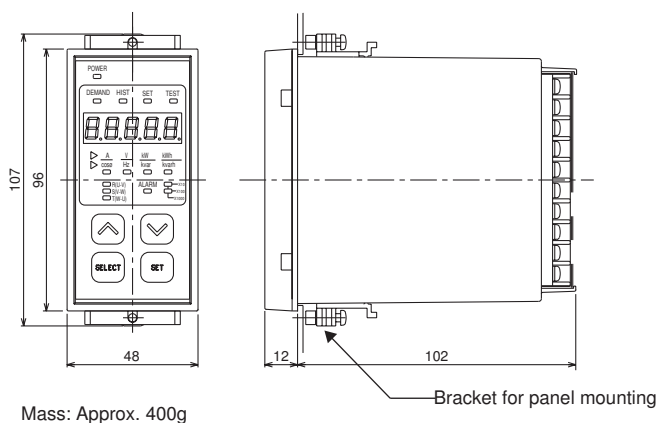


Panel cutting



Molded case circuit breakers with ZCT

■ Description

A leakage current monitoring and breaking system can be easily constructed by combining one of the following models with a UM04 integrated power monitoring unit or a UM03-ARA3G single-circuit power monitoring unit with leakage current measurement.

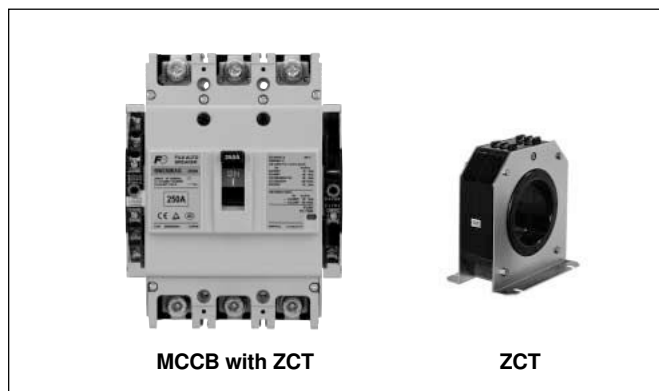

■ Specifications, MCCB with ZCT for line protection

Frame (AF)	125		250		400		630		800		
Type	BW125JAZ BW125RAZ		BW250JAZ BW250RAZ		BW400JAZ BW400RAZ		BW630RAZ		BW800RAZ		
Number of poles and number of elements	3P3E		3P3E		3P3E		3P3E		3P3E		
Rated insulation voltage U_i [V]	AC 690		690		690		690		690		
Rated impulse withstand voltage U_{imp} [kV]	6		6		6		6		6		
Rated current I_n [A]	15,20,30,40,50,60,75,100,125		125,150,160,175,200,225,250		250,300,350,400		500,600,630		700,800		
Reference ambient temperature: 40°C											
Rated frequency [Hz]	50-60		50-60		50-60		50-60		50-60		
Rated breaking capacity [kA]	AC 440/415/400/380V		30	50	30	50	36	50	50	50	
JISC8201-2-1 Ann2 [Icu]	AC 240/230V		50	100	50	100	85	100	100	100	
Isolation complaint	Compliant		Compliant		Compliant		Compliant		Compliant		
Reverse connection	Possible		Possible		Possible		Possible		Possible		
Utilization category	Cat.A		Cat.A		Cat.A		Cat.A		Cat.A		
Dimensions [mm]		a	115		130		178		248		
		b	155		165		257		275		
		c	68		68		103		103		
		d	95		95		146		146		
Mass	1.5		2		6.2		9.5		10		
Connection method	Front		(screw terminals)		(screw terminals)		(flat terminals)		(flat terminals)		
Standard accessories *1	Auxiliary switch	W	●		●		●		●		
	Alarm switch	K	●		●		●		●		
	Trip device	F	●*3		●*3		●*3		●*3		
	Test terminal	T ₁ , T ₂	●		●		●		●		
	ZCT output	Z ₁ , Z ₂	●		●		●		●		
Certified standards	Certified standards	Specified Electrical Appliance and Material *2		Not applicable.		Not applicable.		Not applicable.		Not applicable.	
	JISC8201-2-1	Self declaration		Self declaration		Self declaration		Self declaration		Self declaration	
	IEC60947-2	—		—		—		—		—	
	EN60947-2 (CE marking)	—		—		—		—		—	
Overcurrent tripping method	Thermal-magnetic		Thermal-magnetic		Thermal-magnetic		Thermal-magnetic		Thermal-magnetic		
Trip button	Provided		Provided		Provided		Provided		Provided		

●: Available


*1 The auxiliary switch, alarm switch, and tripping device are provided as accessories. Only models with terminal blocks are available. Lead wires are not provided.

*2 Not applicable for a rated current of 125A.

*3 Specify 100 to 120V AC/100 to 110V DC or 200 to 240V AC/200 to 220V DC for the voltage rating.

*4 The voltage rating is 100 to 240V AC/100 to 220V DC for all models.

■ Internal wiring

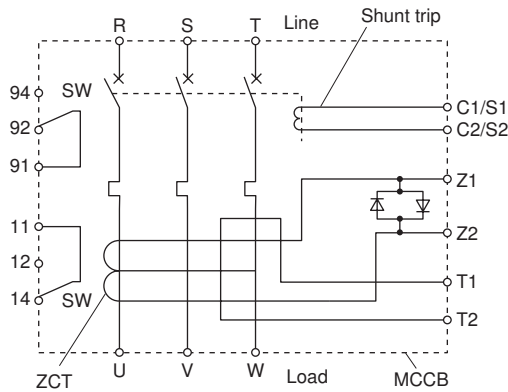

*S1, S2 : Shunt trip coil input terminal
*Z1, Z2 : ZCT output terminal
*T1, T2 : ZCT trip test current input terminal

■ EW series zero-phase current transformers (low-voltage circuit use)

Description	Type	Rated current (A)	Sensor hole diameter (mm)	Hole-through cable			Mass (kg)
				1φ2W	1φ3W, 3φ3W	3φ4W	
Round hole through-type	EW-ZB-30M05	50	30	IV 14mm ²	IV 8mm ²	IV 8mm ²	0.22
	EW-ZB-30M1	100	30	IV 60mm ²	IV 50mm ²	IV 38mm ²	0.32
	EW-ZB-58M2	200	58	IV 125mm ²	IV 100mm ²	IV 80mm ²	0.6
	EW-Z70A4	400	70	IV 400mm ²	IV 325mm ²	IV 250mm ²	1.1
	EW-Z70A6	600	70	IV 400mm ²	IV 325mm ²	IV 250mm ²	1.1
	EW-Z90	800	90	IV 500mm ²	IV 500mm ²	IV 500mm ²	3.1
	EW-Z115	1200	115	—	—	—	4.8
	EW-Z160	2000	160	—	—	—	10
Split through-type	EW-Z250	3000	250	—	—	—	28.5
	EW-ZD30	100	30	IV 60mm ²	V 50mm ²	IV 38mm ²	0.55
	EW-ZD45	200	45	IV 125mm ²	V 100mm ²	IV 80mm ²	0.89
	EW-ZD65	400	65	IV 325mm ²	V 250mm ²	IV 200mm ²	1.15

Description	Type	Rated current (A)	Sensor hole diameter (mm)	Hole-through conductor		Mass (kg)
				3φ3W	3φ4W	
With conductors, 3-pole	EW-Z3B40	400	70	5×40mm	—	2.8
	EW-Z3B50	500	70	6×40mm	—	3.1
	EW-Z3B60	600	90	6×50mm	—	7.6
	EW-Z3B80	800	90	8×50mm	—	8.8
	EW-Z3B100	1000	90	12×50mm	—	11.5
	EW-Z3B120	1200	115	10×75mm	—	15.2
	EW-Z3B160	1600	160	12×100mm	—	30.5
	EW-Z3B200	2000	160	6×100mm×2	—	30.5
	EW-Z3B300	3000	250	8×150mm×2	—	68.6
With conductors, 4-pole	EW-Z4B40	400	90	—	5×40mm	6.4
	EW-Z4B50	500	90	—	6×40mm	6.9
	EW-Z4B60	600	90	—	6×50mm	11.5
	EW-Z4B80	800	90	—	8×50mm	14.1
	EW-Z4B100	1000	115	—	12×50mm	15.5
	EW-Z4B120	1200	115	—	10×75mm	24.9
	EW-Z4B160	1600	160	—	12×100mm	36.4
	EW-Z4B200	2000	160	—	6×100mm×2	36.4
EW-Z4B300	3000	250	—	8×150mm×2	80.3	


Note : Twist the ZCT secondary wires (normally once every 50mm) and separate the wires from power line.

Current transformers, CC2

■ **Description**

Designed for even easier handling. Line-up consists of two types; models exclusively used for FUJI power monitoring unit (F-MPC 04 series), and models for general-purpose instrumentation.

- Improved design enables easier mounting.
- Large K → L display allows easier identification of primary conductor direction.
- Hook attached makes it easier to secure the primary conductor with a cable-tie.
- Clamping diode built in CT will not burn out even with the secondary circuit open (except for the CC2D81).

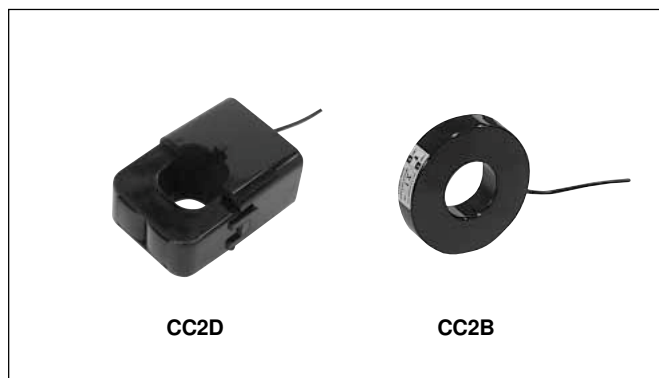

■ **Specifications**

- CTs are dedicated CTs. General-purpose CTs (secondary rated current 5A or 1A) cannot directly be connected because there is a risk of damage.

CT for F-MPC04P (type number UM02), and F-MPC04S (type number UM03)

Model	Compact split		Square split		Toroidal	
Type	CC2D81-0057	CC2D81-0506	CC2D65-2008	CC2D54-4009	CC2B65-2008	CC2B54-4009
Dimesions	Fig.1	Fig.1	Fig.2	Fig.3	Fig.4	Fig.5
Rated primary current	5A	50A	200A	400A	200A	400A
Linear output limit	Depends on the measurement range of the main unit.					
Rated secondary current	7.34mA	73.4mA	66.67mA	133.33mA	66.67mA	133.33mA
Through hole diameter	ø10		ø24	ø36	ø24	ø36
Rated frequency	50 to 60Hz		50 to 60Hz			
Overcurrent strength	10In continuous	1.0In continuous	1.0In continuous			
Ratio error	±1%/In ±1.5%/0.2In					
Phase difference	150'±90'/In, 180'±120'/0.2In		±60'/In, ±90'/0.2In			
Rated burden	0.2693mVA (5Ω load resistance)		44.4mVA (10Ω load resistance)	0.18VA (10Ω load resistance)	44.4mVA (load resistance of 10Ω or less)	177.8mVA (load resistance of 10Ω or less)
Insulation resistance	500VDC/100MΩ or more (between sensor core and output lead wire)				500VDC/100MΩ or more (between through hole and output lead wire)	
Dielectric strength	2000VAC/min (between sensor core and output lead wire)				2,500VAC/min (between through hole and output lead wire)	
Output protection	—		3Vp built-in clamp diode	±3Vp built-in clamp diode	—	
Operating conditions	-20 to 75°C, 80%RH or lower (No condensation)		-20 to 75°C, 80%RH or lower (No condensation)			
Split portion securing method	Clamp		Clamp		—	
Mounting method	Hanger		Hanger			
Connection	Heat-resistant IV cable 0.3mm ² x 1,000mm		Heat-resistant IV cable AWG18, 1,000mm		PVC cable 0.3mm ² x 1,000mm	M3 screw terminal
Mass	45g		200g	300g	60g	180g

■ Specifications

CT for F-MPC04 (type number UM04)

Model	Square split			Toroidal split	
Type	CC2D74-1001	CC2D74-2001	CC2D74-4001	CC2C76-8001	CC2C76-12X1
Dimensions	Fig.3			Fig.6	
Rated primary current	100A	200A	400A	800A	1,200A
Linear output limit	Depends on the measurement range of the main unit.				
Rated secondary current	1A				
Through hole diameter	ø36			ø60	
Rated frequency	50 to 60Hz				
Overcurrent strength	1.0In continuous				
Ratio error	±1%/In ±1.5%/0.2In			±1%/In ±1.5%/0.2In ±3%/0.05In	
Phase difference	90±90'/In	60±60'/In	±80'/In	±80'/In, ±100'/0.2In	
Rated burden	0.5VA (0.5Ω load resistance)				
Insulation resistance	500VDC/100MΩ or more (between sensor core and output lead wire)			500VDC/100MΩ or more (between through hole and output)	
Dielectric strength	2000VAC/min (between sensor core and output lead wire)			2500VAC/min (between through hole and output)	
Output protection	±1.4Vp with built-in clamp diode				
Operating conditions	-20 to 75°C, 80%RH or lower (No condensation)				
Split portion securing method	Clamp				
Mounting method	Hanger				
Connection	Heat-resistant IV cable AWG18, 1,000mm			Vinyl cable 0.75mm ² x 1,000mm 2-core	
Mass	300g			500g	
Combination CT-BOX	UM04X-1			UM04X-1	

- Note:
- To cope with extension of CT output wire, CT with connector and relay cable are available.
 - For CTs without built-in output protection diode, be sure to draw a primary current after connecting a rated load. Drawing a primary current without connecting the rated load is dangerous because high voltage appears at the output terminal.
 - CT-BOX to be used together with general-purpose CT (10 to 7500A/5A) is the UM04X-5.

■ Dimensions, mm

Fig1 CC2D81




Fig2 CC2D65

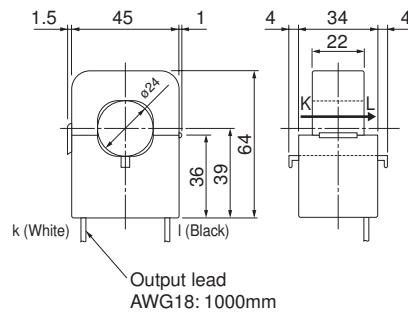


Fig3 CC2D54, CC2D74




Fig4 CC2B65




Fig5 CC2B54


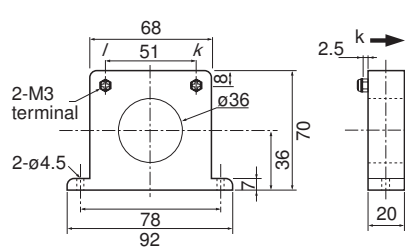


Fig6 CC2C76

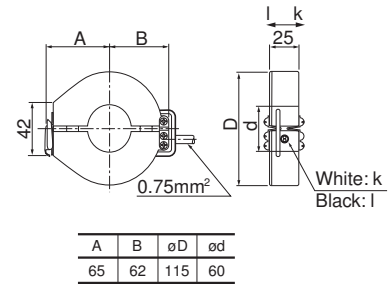

Terminal relay RS16


■ Description

The RS16 relay, in combination with F-MPC04 (type: UM01) power monitoring unit, outputs the current prealarm signal and leakage current pre alarm signal, and the signal to trip circuit breakers.

■ Specifications

Type	RS16-DE04H	
No. of connectable circuits	5	
Operate time	10ms or less	
Release time	10ms or less	
Vibration	Malfunctions durability	10–55Hz 1mm double amplitude (0.61N max.)
	Mechanical durability	10–55Hz 1mm double amplitude (0.61N max.) 3 times in each X, Y, Z direction, total 18 times
Shock	Malfunctions durability	100m/s ²
	Mechanical durability	200m/s ² , 2 hours in each X, Y, Z direction, total 6 hours
Operating ambient temperature	-25 to 55°C (no icing or no condensation)	
Operating ambient humidity	35 to 85%RH	
Terminal screw size	M3	
Tightening torque	0.5–0.7N • m	
Mounting	Rail mounting (screw mounting also available)	
Applicable crimp terminal	R1.25–3 (Max 6mm)	
Applicable wire size	Max. 1.4mm dia.	
LED color	Operation indication	Red
	Power source indication	Green
Coil surge suppressor	Diode	
Max. No. of rely insertion	50	
Insulation resistance (initial)	100MΩ (500V DC megger)	
Dielectric strength	Between contact and coil	2000V AC, 1 minute
	Between same polarity contacts	1000V AC, 1 minute
	Between reverse polarity contacts	2000V AC, 1 minute
	between heteropolar coils	500V AC, 1 minute
Mass	200g	


■ Dimensions, mm

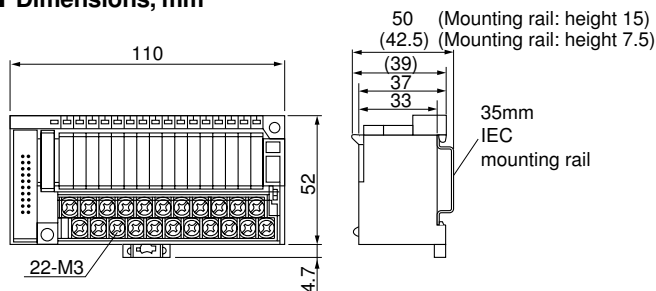


■ Connector cable

For connecting CT-BOX, Terminal relay RS16, and Connector terminal block AU-CW.

1m long	AUX014-201
2m long	AUX014-202
3m long	AUX014-203

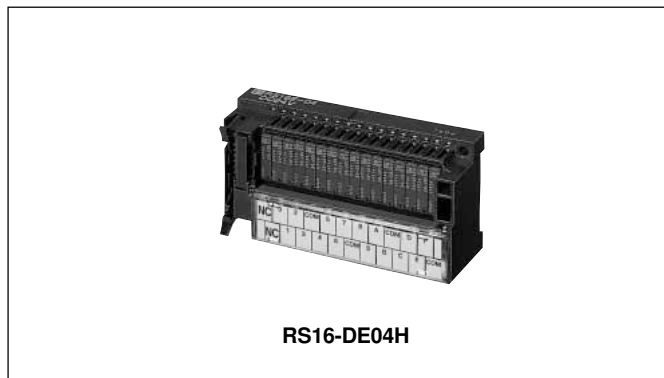


■ Terminal arrangement

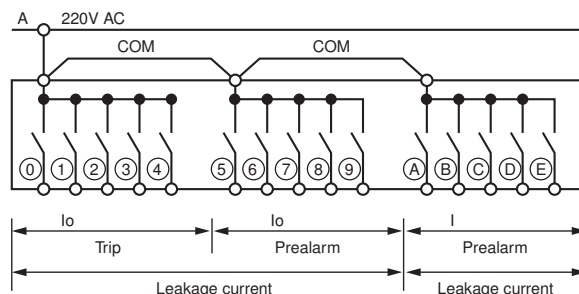

- | | |
|--|--|
| <p>3-phase 3-wire</p> <ul style="list-style-type: none"> ① :lo trip (No.1 or 6) ② :lo trip (No.2 or 7) ③ :lo trip (No.3 or 8) ④ :lo trip (No.4 or 9) ⑤ :lo prealarm (No.1 or 6) ⑥ :lo prealarm (No.2 or 7) ⑦ :lo prealarm (No.3 or 8) ⑧ :lo prealarm (No.4 or 9) ⑨ :lo prealarm (No.5 or 0) | <p>3-phase 4-wire</p> <ul style="list-style-type: none"> ① :lo trip (No.1 or 4) ② :lo trip (No.2 or 5) ③ :lo trip (No.3 or 6) Unused Unused ⑤ :lo prealarm (No.1 or 4) ⑥ :lo prealarm (No.2 or 5) ⑦ :lo prealarm (No.3 or 6) Unused Unused ⑨ :lo prealarm (No.5 or 0) Unused Unused Unused Unused Unused Unused |
|--|--|

Panel drilling

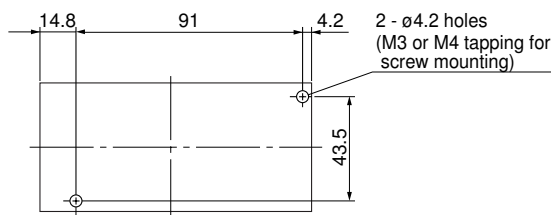

Power Monitoring Equipment
Connector terminal-block
AU-CW21B1




MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

Connector terminal-block, AU-CW21B1

■ **Description**

The AU-CW21B connector terminal-block, in combination with the FMPC04 (type: UM04) power monitoring unit, can output a kWh pulse.

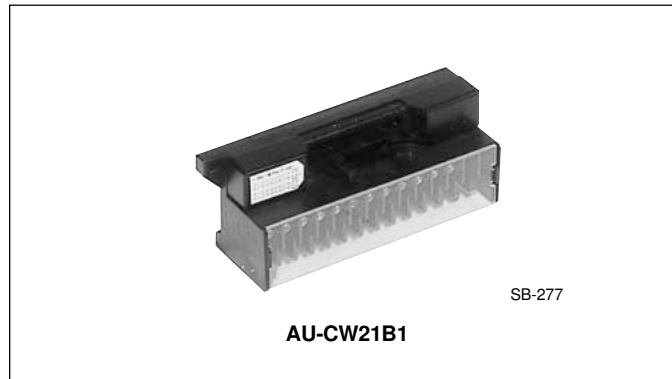

■ **Specifications**

Type	Front mounting	AU-CW21B1-04
	Rear mounting	AU-CW21B1-04R
Insulation voltage	60V AC/DC	
Continuous current	1A (at 40°C)	
No. of terminals	21	
No. of connectors	20	
Terminal screw size	M3.5	
Insulation resistance	100Ω or more	
Dielectric strength	500V 1min	
Allowable ambient temperature	-5 to +40°C	
Allowable ambient humidity	45 to 85%RH	
Flame resistance	UL94-V1	
Connection cable	Multi-core cable	AUX014-20□ *
	Flat cable	AUX024-20□ *

■ **Ordering information**



Specify the following:
 1. Type number

Note: * Specify cable length by replacing □ with 1: 1m, 2: 2m, or 3: 3m.

■ **Terminal arrangement and output**

Terminal No.	Pulse output circuit No.	Remarks
23	Circuit 1 pulse output	Circuit 1 to 6 pulse outputs are valid in 3-phase 4-wire system.
22	Circuit 2 pulse output	
21	Circuit 3 pulse output	
20	Circuit 4 pulse output	
19	Circuit 5 pulse output	
18	Circuit 6 pulse output	
17	Circuit 7 pulse output	
16	Circuit 8 pulse output	
10	Circuit 9 pulse output	
9	Circuit 10 pulse output	
15, 2	Common (-)	

■ **Dimensions, mm**

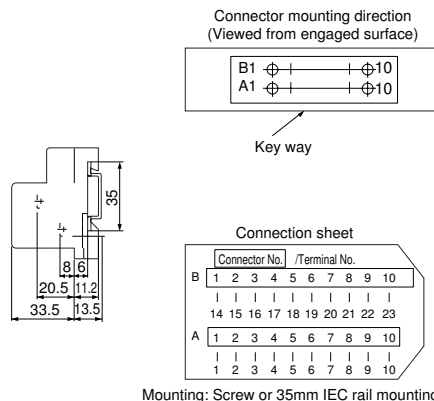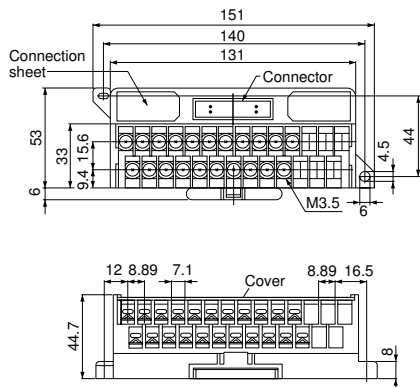

Mounting: Screw or 35mm IEC rail mounting



MSA CONTROL - (11) 3961-1171 - comercial@msacontrol.com.br

Catalog Disclaimer

The information contained in this catalog does not constitute an express or implied warranty of quality, any warranty of merchantability or fitness for a particular purpose is hereby disclaimed.

Since the user's product information, specific use application, and conditions of use are all outside of Fuji Electric FA Components & Systems' control, **it shall be the responsibility of the user to determine the suitability of any of the products mentioned for the user's application.**

One Year Limited Warranty

The products identified in this catalog shall be sold pursuant to the terms and conditions identified in the "Conditions of Sale" issued by Fuji Electric FA with each order confirmation.

Except to the extent otherwise provided for in the Conditions of Sale issued by Fuji Electric FA, Fuji Electric FA warrants that the Fuji Electric FA products identified in this catalog shall be free from significant defects in materials and workmanship provided the product has not been: 1) repaired or altered by others than Fuji Electric FA; 2) subjected to negligence, accident, misuse, or damage by circumstances beyond Fuji Electric FA's control; 3) improperly operated, maintained or stored; or 4) used in other than normal use or service. This warranty shall apply only to defects appearing within one (1) year from the date of shipment by Fuji Electric FA, and in such case, only if such defects are reported to Fuji Electric FA within thirty (30) days of discovery by purchaser. Such notice should be submitted in writing to Fuji Electric FA at 5-7, Nihonbashi Odemma-cho, Chuo-ku, Tokyo, Japan. The sole and exclusive remedy with respect to the above warranty whether such claim is based on warranty, contract, negligence, strict liability or any other theory, is limited to the repair or replacement of such product or, at Fuji Electric FA's option reimbursement by Fuji Electric FA of the purchase price paid to Fuji Electric FA for the particular product. **Fuji Electric FA does not make any other representations or warranties, whether oral or in writing, expressed or implied, including but not limited to any warranty regarding merchantability or fitness for a particular purpose.** Except as provided in the Conditions of Sale, no agent or representative of Fuji Electric FA is authorized to modify the terms of this warranty in writing or orally.

In no event shall Fuji Electric FA be liable for special, indirect or consequential damages, including but not limited to, loss of use of the product, other equipment, plant and power system which is installed with the product, loss of profits or revenues, cost of capital, or claims against the purchaser or user of the product by its customers resulting from the use of information, recommendations and descriptions contained herein. The purchaser agrees to pass on to its customers and users, in writing at the time inquiries and orders are received by buyer, Fuji Electric FA's warranty as set forth above.

Caution "Safety precautions"

- Operate (keep) in the environment specified in the operating instructions and manual. High temperature, high humidity, condensation, dust, corrosive gases, oil, organic solvents, excessive vibration or shock might cause electric shock, fire, erratic operation or failure.
- Follow the regulations of industrial wastes when the product is to be discarded.
- The products covered in this catalog have not been designed or manufactured for use in equipment or systems which, in the event of failure, can lead to loss of human life.
- If you intend to use the products covered in this catalog for special applications, such as for nuclear energy control, aerospace, medical, or transportation, please consult our Fuji Electric FA agent.
- Be sure to provide protective measures when using the product covered in these catalogs in equipment which, in the event of failure, may lead to loss of human life or other grave results.
- Follow the directions of the operating instructions when mounting the product.